


MM16F DCモータ

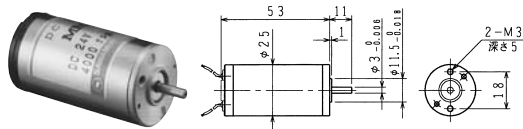


■MM16F

2W

連続定格						無負荷		ドライバー	
品番	出力 W	電圧 V	電流 A	回転数 rpm	トルク mN·m	電流 A	回転数 rpm	品番	電圧 V
MM16F	2	6	0.7	4000	4.9	0.15	5600	MS-17	12
		12	0.35			0.07		MS-19	24
		24	0.18			0.04		MS-10	100


MM16F-J2C

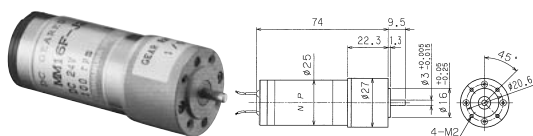

■MM16F-J2C-□

品番	MM16F-	8	30	50	100	150	300	500	1500	3000
回転速度	rpm	600	180	100	50	35	18	10	3.5	1.8
定格トルク	mN·m	9.8	20.0	39.0	59.0	59.0	98.0	98.0	98.0	49.0
定格電圧	6V (A)	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
	12V (A)	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
	24V (A)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1


MM16F-LJC

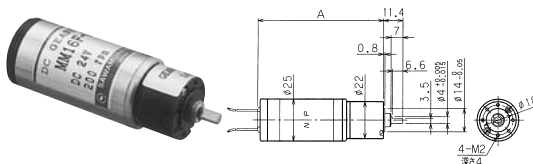

■MM16F-LJC-□

品番	MM16F-	5	20	60	100
回転速度	rpm	800	200	75	50
定格トルク	mN·m	18.0	49.0	98.0	98.0
定格電圧	6V (A)	0.7	0.6	0.5	0.4
	12V (A)	0.4	0.6	0.3	0.2
	24V (A)	0.2	0.2	0.1	0.1

SS23F DCモータ

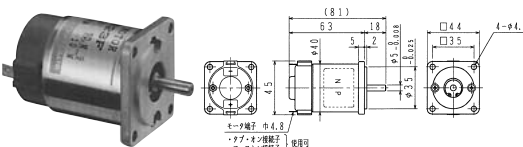


■SS23F

10W

連続定格						無負荷		ドライバー	
品番	出力 W	電圧 V	電流 A	回転数 rpm	トルク mN·m	電流 A	回転数 rpm	品番	電圧 V
SS23F	10	12	1.6	3000	0.032	0.25	4800	MS-17	12
		24	0.8			0.12		MS-19	24
								MS-10	100
								MS-14	100


SS23FQ-H1

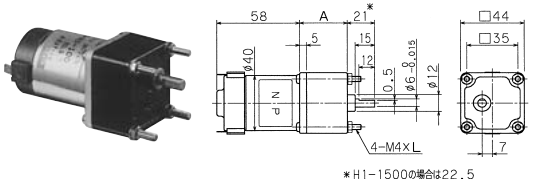

■SS23FQ-H1-□

品番	SS23FQ-	10	30	60	100	150	200	300	500	750	1500
回転速度	rpm	300	100	50	30	20	15	10	6	4	2
定格トルク	mN·m	0.1	0.2	0.3	0.4	0.4	0.5	0.5	0.5	0.5	0.5
定格電圧	12V (A)	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.2	0.2	0.2


SS23F-H2L

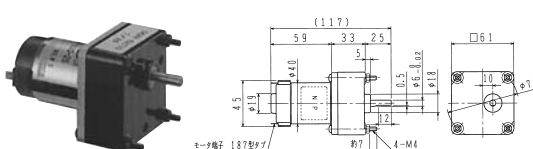

■SS23F-H2L-□

品番	SS23F-	5	12.5	25	50	100	150	250	500	1800
回転速度	rpm	500	200	100	50	25	18	10	6	4
定格トルク	mN·m	1.0	0.2	0.4	0.8	1.0	1.0	1.0	1.0	1.0
定格電圧	12V (A)	1.0	0.8	0.8	0.8	0.7	0.6	0.6	0.4	0.4
	24V (A)	0.6	0.5	0.4	0.4	0.4	0.3	0.3	0.2	0.2

SS23F-LH

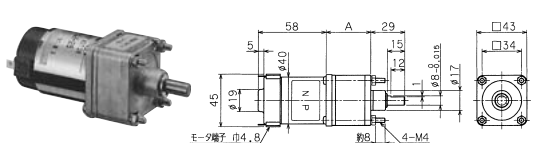

■SS23F-LH-□

品番	SS23F-	15	25	50	100	200	500	860
回転速度	rpm	180	100	50	25	13	6	4
定格トルク	mN·m	0.2	0.4	0.8	1.6	2.0	2.0	2.0
定格電圧	12V (A)	0.8	0.8	0.8	0.8	0.6	0.4	0.3
	24V (A)	0.4	0.4	0.4	0.4	0.3	0.2	0.2


SS23F-V

品番	SS23F	125	300	625
回転速度	rpm	20	8	4
定格トルク	mN·m	0.3	0.5	0.5
定格電圧	12V (A)	0.8	0.8	0.6
	24V (A)	0.4	0.4	0.3

SS23F-E

品番	SS23F	12.5	30	50
回転速度	rpm	200	80	50
定格トルク	mN·m	0.1	0.2	0.3
定格電圧	12V (A)	0.8	0.8	0.8
	24V (A)	0.4	0.4	0.4

SS32G DCモータ

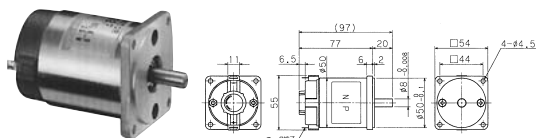


SS32G

14W

連続定格						無負荷		ドライバー	
品番	出力 W	電圧 V	電流 A	回転数 rpm	トルク mN・m	電流 A	回転数 rpm	品番	電圧 V
	SS32G	14	12	2.3	2500	0.054	0.4	3300	MS-19
24			1.1	2500	0.2		3200	MS-60□2402	24
100			0.26	2500	0.05			MS-14	24


SS32G-H3

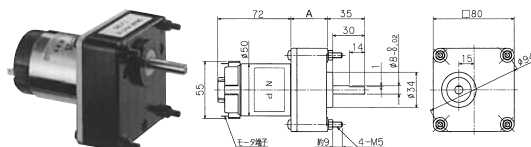

SS32G-H3-□

品番	SS32G	5	12.5	25	50	100	250	500	1800
回転速度	rpm	500	200	100	50	25	10	5	1.4
定格トルク	mN・m	0.2	0.4	0.8	1.5	2.0	2.9	3.9	3.9
定格電圧	12V (A)	2.0	1.8	1.8	1.8	1.4	1.2	1.2	1.0
	24V (A)	1.0	0.9	0.9	0.9	0.7	0.6	0.6	0.5
	100V (A)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1


SS32G-L1

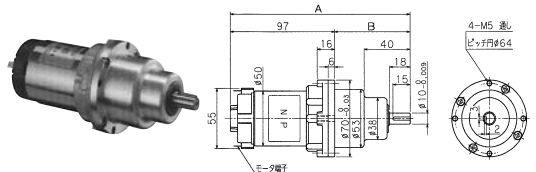

SS32G-L1-□

品番	SS32G	5	10	25	50	100	150	300
回転速度	rpm	500	250	100	50	25	18	9
定格トルク	mN・m	0.2	0.4	0.8	1.5	2.9	3.9	3.9
定格電圧	12V (A)	2.3	2.3	1.8	1.8	1.8	1.8	1.4
	24V (A)	1.1	1.1	0.9	0.9	0.9	0.9	0.7
	100V (A)	0.3	0.3	0.2	0.2	0.2	0.2	0.2


SS32G-G

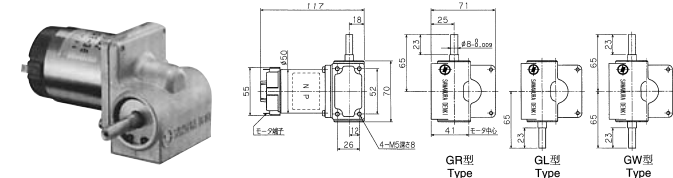

SS32G-G-□

品番	SS32G	18	36
回転速度	rpm	140	70
定格トルク	mN・m	0.3	0.5
定格電圧	12V (A)	2.0	1.6
	24V (A)	1.0	0.3
	100V (A)	0.3	0.2

SS40E2 DCモータ

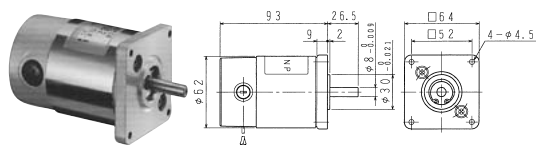


SS40E2

20W

連続定格						無負荷		ドライバー	
品番	出力	電圧	電流	回転数	トルク	電流	回転数	品番	電圧
	W	V	A	rpm	mN・m	A	rpm		V
SS40E2	20	12	3.2	2500	0.78	0.5	3200	MS-100□05	12
								MS-400□1204	12
		24	1.5			0.2		MS-100□05	24
								MS-400□2404	24
		100	0.35			0.05		MS-300□1001	100


SS40E2-H3

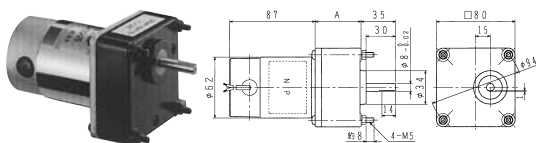

SS40E2-H3-□

品番	SS40E2	5	12.5	25	50	100	250	500	1800
回転速度	rpm	500	200	100	50	25	10	5	1.4
定格トルク	mN・m	0.3	0.6	1.2	2.0	2.5	2.9	3.9	3.9
定格電圧	12V (A)	2.5	2.4	2.4	2.1	1.4	1.1	1.0	0.8
	24V (A)	0.3	0.2	0.3	0.3	0.2	0.2	0.1	0.1
	100V (A)	0.3	0.2	0.3	0.3	0.2	0.2	0.1	0.1

SS40E2-L1/E20-L1

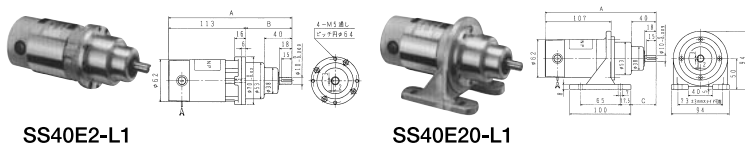


SS40E2-L1/SS40E20-L1-□

品番	SS40E2/20	50	100	150	300
回転速度	rpm	50	25	18	9
定格トルク	mN・m	2.9	3.9	3.9	3.9
定格電圧	12V (A)	3.0	2.2	2.2	1.2
	24V (A)	1.4	1.1	1.1	0.6
	100V (A)	0.4	0.3	0.3	0.2

SS60E3 DCモータ


SS60E3

120W

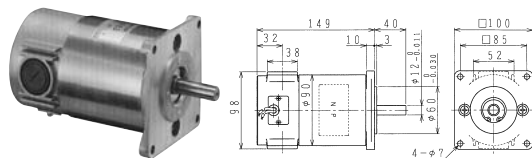


品番	連続定格					無負荷		ドライバー	
	出力 W	電圧 V	電流 A	回転数 rpm	トルク mN・m	電流 A	回転数 rpm	品番	電圧 V
SS60E3	120	12	16	2500	0.47	1.9	3000	MS-100□25	12
		24	8			1		MS-400□1215	12
		100	1.7			0.25		MS-100□10	24
								MS-400□2408	24
								MS-300□1005	100

SS60E3-L4/E30-L4

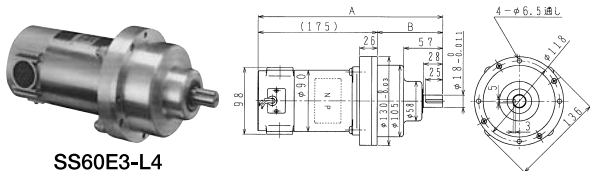

SS60E3-L4

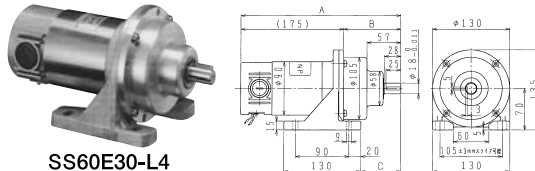


SS60E30-L4


SS60E3-L4/SS60E30-L4-□

品番	SS60E3/30	5	10	25	50
回転速度	rpm	500	250	100	50
定格トルク	mN・m	2.0	3.9	7.8	12.0
定格電圧	12V (A)	14.0	14.0	12.0	11.0
	24V (A)	7.0	7.0	6.0	5.5
	100V (A)	1.7	1.7	1.5	1.3

SS60E3-L5/E30-L5

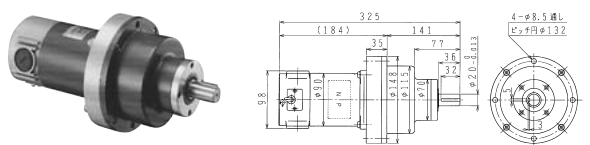

SS60E3-L5

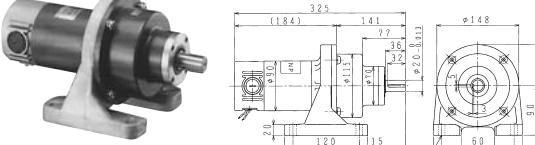


SS60E30-L5


SS60E3-L5/SS60E30-L5-□

品番	SS60E3/30	100	150	300
回転速度	rpm	25	18	9
定格トルク	mN・m	29.0	29.0	29.0
定格電圧	12V (A)	14.0	11.0	6.5
	24V (A)	7.0	5.5	3.2
	100V (A)	1.5	1.3	0.8


SS60E3-HP6/E3-HP8R

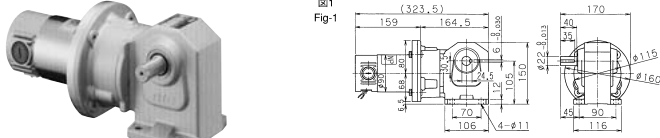

SS60E3-HP6R

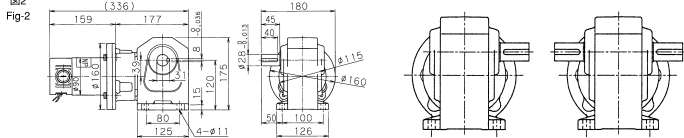

SS60E3-HP8R



HP□L


HP□W

SS60E3-HP6/SS60E3-HP8R-□

品番	SS60E3	HP6R-5	HP6R-10	HP6R-25	HP6R-50	HP8R-100	HP8R-200
回転速度	rpm	500	250	100	50	25	12
定格トルク	mN・m	1.8	3.5	8.8	18.0	32.0	65.0
定格電圧	12V (A)			16.0			
	24V (A)			8.0			
	100V (A)			1.8			


SS60E3-H4EB

SS60E3-H4EB-□

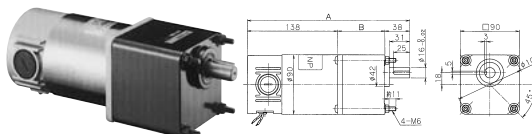

品番	SS60E3	5	12.5	25	50	100	180
回転速度	rpm	500	250	100	50	25	18
定格トルク	mN・m	1.2	2.7	4.9	9.8	18.0	29.0
定格電圧	12V (A)	10.0	10.0	10.0	10.0	10.0	9.0
	24V (A)	5.0	5.0	5.0	5.0	5.0	4.5
	100V (A)	1.2	1.2	1.2	1.2	1.2	1.1



SS60E6 DCモータ

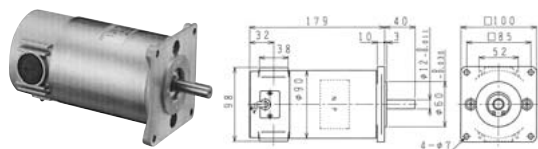

SS60E6

連続定格						無負荷		ドライバー	
品番	出力 W	電圧 V	電流 A	回転数 rpm	トルク mN・m	電流 A	回転数 rpm	品番	電圧 V
SS60E6	250	12	30	2500	0.98	2.4	3000	MS-400□1230	12
		24	15			1.2		MS-100□15	24
								MS-400□2415	24
		100	3.4			0.3		MS-300□1005	100




■ SS60E6-L5/E60-L5

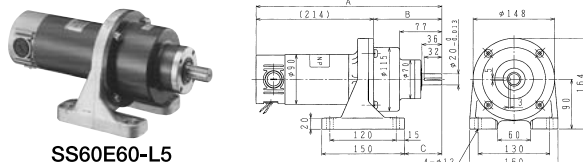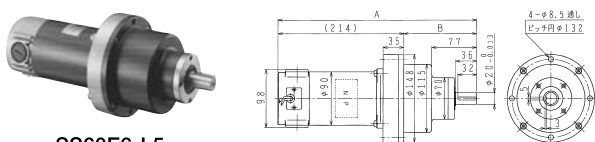

SS60E6-L5/SS60E60-L5-

品番	SS60E6/60	5	10	25	50
回転速度	rpm	500	250	100	50
定格トルク	mN・m	3.9	7.8	15.0	20.0
定格電圧	12V (A)	27.0	27.0	25.0	18.0
	24V (A)	13.0	13.0	12.0	9.0
	100V (A)	3.0	3.0	3.0	2.2


■ SS60E60-HG4/6/8

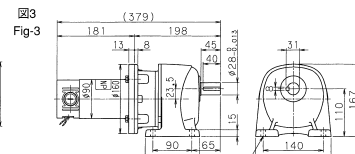

SS60E60-HG4/6/8-

品番	SS60E60	HG4-5	HG4-10	HG4-25	HG6-50	HG8-100	HG8-200
回転速度	rpm	500	250	100	50	25	12
定格トルク	mN・m	4.1	7.8	19.0	34.0	64.0	130.0
定格電圧	12V (A)	30.00					
	24V (A)	15.00					
	100V (A)	34.0					




SS60E8 DCモータ

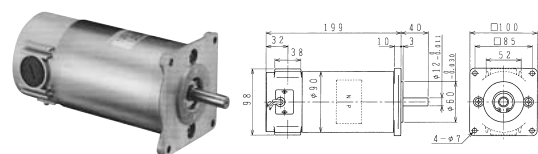

SS60E8

連続定格						無負荷		ドライバー	
品 番	出力	電圧	電流	回転数	トルク	電流	回転数	品番	電圧
	W	V	A	rpm	mN・m	A	rpm		V
SS60E8	350	24	15	2500	0.98	1.2	3000	MS-100□15	24
		100	3.4			0.3		MS-400□2415	24
								MS-300□1005	100

■ SS60E8-HP8/10R

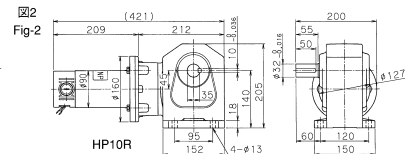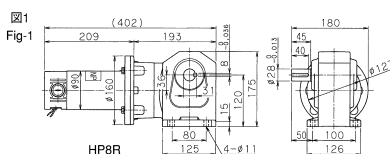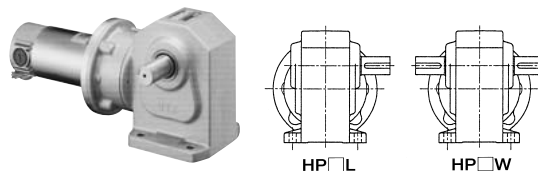

SS60E8-HP8/10R-

品番	SS60E8	HP8R-5	HP8R-10	HP8R-25	HP8R-50	HP10R-100	HP10R-200
回転速度	rpm	500	250	100	50	25	12
定格トルク	mN・m	5.4	9.8	25.0	49.0	88	180
定格電圧	24V (A)	21.00					
	100V (A)	4.80					