


SMP オイルゲージ

協和


KD・KC〔打込み式〕

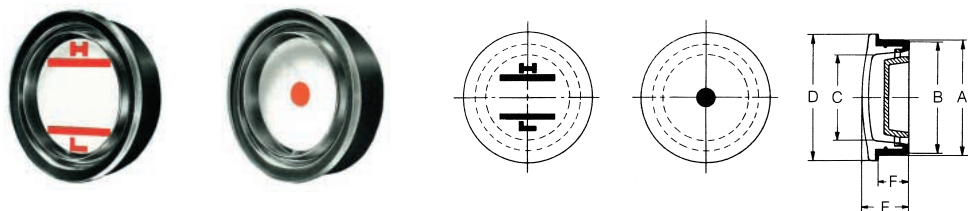

品 番 HL	価 格 1個	品 番 日の丸	価 格 1個	A	B	C	D	E	F	取付 孔径
KD-0	400	KC-0	400	21.5	21.0	14.0	23.0	10.1	6.5	21.0
KD-0A	400	KC-0A	400	21.0	20.5	14.0	23.0	10.1	6.5	20.5
KD-1	470	KC-1	470	28.5	28.0	20.5	32.5	12.6	8.0	28.0
KD-2	780	KC-2	780	34.5	34.0	25.5	38.0	14.6	9.5	34.0
KD-3	940	KC-3	940	38.5	38.0	29.0	44.0	16.0	10.3	38.0
KD-4	1,130	KC-4	1,130	47.0	46.5	35.5	50.0	16.8	10.5	46.5
KD-4A	1,130	KC-4A	1,130	46.5	45.9	35.5	50.0	16.8	10.5	45.9
KD-5	1,500	KC-5	1,500	59.0	58.5	47.0	64.0	19.6	13.0	58.5

●A・Bの寸法公差は±0.2

KDM・KCM〔打込み式〕

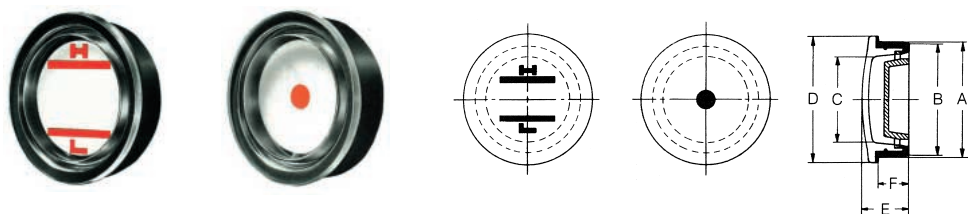


品 番 HL	価 格 1個	品 番 日の丸	価 格 1個	A	B	C	D	E	F	取付 孔径
KDM-20	440	KCM-20	440	20.5	20.0	14.0	23.0	10.1	6.5	20.0
KDM-25	470	KCM-25	470	25.5	25.0	18.0	28.5	11.8	7.3	25.0
KDM-30	540	KCM-30	540	30.5	30.0	20.5	32.5	12.6	8.0	30.0
KDM-35	810	KCM-35	810	35.5	35.0	25.5	38.0	13.8	9.0	35.0
KDM-40	940	KCM-40	940	40.5	40.0	29.0	44.0	16.0	16.0	40.0
KDM-50	1,250	KCM-50	1,250	50.5	50.0	39.0	53.0	17.2	11.6	50.0
KDM-60	1,570	KCM-60	1,570	60.5	60.0	47.0	64.0	19.9	13.4	60.0

●A・Bの寸法公差は±0.2

SMP オイルゲージ

協和




■KB〔打込み式〕



品 番	価 格	品 番	価 格	A	B	C	D	E	F	取付孔 H8
HL	1個	日の丸	1個							
—		KB-20	370	20.5	20.0	14.0	23.0	10.1	6.5	20.0
KB-25HL	400	KB-25	400	25.5	25.0	18.0	28.5	11.8	7.3	25.0
KB-30HL	530	KB-30	530	30.5	30.0	20.5	32.5	12.6	8.0	30.0
KB-35HL	620	KB-35	620	35.5	35.0	25.5	38.0	13.8	9.0	35.0
KB-40HL	750	KB-40	750	40.5	40.0	29.0	44.0	16.0	16.0	40.0




●A・Bの寸法公差は±0.2

■KIS〔ネジ付〕



品 番	価 格	A	B	C	D	E	F	G	Oリング
	1個								
KIS-2	370	19.0	21.0	8.0	5.5	9.5	15.0	PF1/4	P-10A
KIS-3	400	22.0	24.5	10.0	5.5	10.5	16.0	PF3/8	P-15
KIS-4	440	27.0	30.0	13.0	5.5	10.5	16.0	PF1/2	P-18
KIS-6	530	32.0	36.0	17.5	6.0	12.0	18.0	PF3/4	P-20
KIS-8	620	38.0	42.0	21.5	5.8	16.0	21.8	PF1	P-28

■KMS〔ネジ付〕



品 番	価 格	A	B	C	D	E	F	G	Oリング
	1個								
KMS-20A	400	27.0	30.0	13.0	5.5	10.5	16.0	M20×1.5	P-18
KMS-28A	520	32.0	36.0	17.5	6.0	12.0	18.0	M28×2.0	P-24
KMS-35A1.5	620	38.0	42.0	21.5	5.8	16.0	21.8	M35×1.5	P-30
KMS-35A2.0	620							M35×2.0	



SMP オイルゲージ

協和



■KDS〔ネジ付〕



KDS-20型/28型





KDS-38型



品 番	価 格	A	B	C	D	E	F	G
	1個							
KDS-20	1,470	20.0	40.0	8.0	29.0	12.5	10.0	M6×1
KDS-28	1,880	28.0	48.0	14.0	37.0	12.5	10.0	M6×1
KDS-38	2,290	38.0	60.0	23.0	47.0	13.5	10.0	M6×1

- 取り付けボルト自体が油の流通作用を行いますので、使用になる製品本体に2(または4)個のネジ加工をするだけで、簡単に取り付けできます。

■KMH〔ネジ付〕





品 番	価 格	A	B	C	D	E	F	G	Oリング
	1個								
KMH-4	1,160	27.0	30.0	14.0	9.5	10.0	19.5	G1/2	P-16
KMH-6	1,380	32.0	36.0	17.0	9.5	13.0	22.5	G3/4	P-20
KMH-8	1,570	38.0	42.0	22.0	10.0	18.0	25.0	G1	P-25

- 耐熱性に優れています。このKMH型の本体は耐熱強化樹脂の採用で、常時135℃の耐熱性をもっています。
- 耐薬品性(作動油、ウォータグリコール、リン酸エステル等)に優れています。

■KIM〔ネジ付〕



KIM型





品 番	価 格	A	B	C	D	E	F	G	Oリング
	1個								
KIM-4	2,100	27.0	30.0	15.5	9.0	18.0	2.0	G1/2	P-16
KIM-6	2,450	32.0	36.0	19.0	9.0	19.0	2.0	G3/4	P-20
KIM-8	3,610	38.0	42.0	25.0	10.0	20.0	2.0	G1	P-25

- KMH型に比較して、さらに耐圧性能が良く、耐熱性に優れています。
- 耐圧は0.5MPa、耐熱は135℃です。

SMP オイルゲージ

協和




■KIM-□AR〔ネジ付〕



品 番	価 格	A	B	C	D	E	F	G
	1個							
KIM-2AR	1,720	20.0	23.0	8.5	9.0	18.0	2.0	G1/4
KIM-3AR	1,720	23.0	26.0	12.0	9.0	18.0	2.0	G3/8
KIM-4AR	1,570	27.0	31.2	15.5	10.0	19.0	2.0	G1/2
KIM-6AR	1,880	32.0	37.0	19.0	10.0	19.5	2.0	G3/4
KIM-8AR	2,640	38.0	43.8	25.0	10.0	20.0	2.0	G1
KIM-10AR	5,180	46.0	51.0	33.0	11.0	23.0	2.0	G1.1/4
KIM-12AR	7,220	54.0	59.0	38.5	11.0	23.0	2.0	G1.1/2

- KMH型に比較して、さらに耐圧性能が良く、耐熱性に優れています。
- 耐圧は0.5MPa、耐熱は135℃です。

■KL・KL2〔ネジ付〕



品 番	価 格	品 番	価 格	A	B	C	D	E	F	G	H
	1個		1個								
KL-60	2,640	KL2-60	2,640	60.0	80.0	40.0	11.5	14.0	25.0	8.0	M 8×1.25
KL-60A	2,730	KL2-60A	2,730	60.0	86.0	36.0	12.0	16.0	30.0	11.0	M10×1.50
KL-70	3,010	KL2-70	3,010	70.0	90.0	50.0	11.5	14.0	25.0	8.0	M 8×1.25
KL-80	3,200	KL2-80	3,200	80.0	100.0	60.0	11.5	14.0	25.0	8.0	M 8×1.25
KL-80A	3,300	KL2-80A	3,300	80.0	106.0	56.0	12.0	16.0	30.0	11.0	M10×1.50
KL-100A	3,580	KL2-100A	3,580	100.0	126.0	76.0	12.0	16.0	30.0	11.0	M10×1.50
KL-100B	3,580	KL2-100B	3,580	100.0	126.0	76.0	12.0	16.0	30.0	9.0	M 8×1.25
KL-120	4,360	KL2-120	4,360	120.0	146.0	96.0	12.0	16.0	30.0	11.0	M10×1.50
KL-150	5,180	KL2-150	5,180	150.0	176.0	126.0	12.0	16.0	30.0	11.0	M10×1.50

- 耐圧0.5～0.8MPa・耐熱100℃