



SMP ロックナット

URAMAセルフロックナット




ナット：スチール（抗張力500－700N/mm²）
 ナイロンリング：ポリアミド

品 番	価 格	ネジ径 d	寸 法						JIS相当品 呼び番号
			H	h	D	D2	t	S	
GUK-10	330	M10×0.75	7.4	4.5	18	15	15	3	AN 00
GUK-12	350	M12×1.0	7.4	4.5	21	18	18	3	AN 01
GUK-15	390	M15×1.0	8.4	5.5	24	21	21	4	AN 02
GUK-17	410	M17×1.0	8.4	5.5	28	24	24	4	AN 03
GUK-20	470	M20×1.0	9.4	6.5	32	27	27	4	AN 04
GUK-25	550	M25×1.5	10.3	6.5	38	33	33	5	AN 05
GUK-30	660	M30×1.5	10.9	6.5	44	38	38	5	AN 06
GUK-35	800	M35×1.5	11.1	7.0	50	44	44	5	AN 07
GUK-40	1,390	M40×1.5	12.1	8.2	56	50	50	6	AN 08
GUK-45	1,650	M45×1.5	12.1	8.2	62	55	55	6	AN 09
GUK-50	2,480	M50×1.5	12.7	8.5	68	61	61	6	AN 10
GUK-55	3,630	M55×2.0	13.2	8.5	75	68	68	7	AN 11
GUK-60	3,800	M60×2.0	13.2	8.5	80	73	73	7	AN 12
GUK-65	3,960	M65×2.0	14.3	9.5	85	77	77	7	AN 13
GUK-70	4,620	M70×2.0	14.3	9.5	92	84	84	8	AN 14
GUK-75	5,610	M75×2.0	15.3	10.5	98	89	89	8	AN 15
GUK-80	6,440	M80×2.0	16.3	11.5	105	96	96	8	AN 16
GUK-85	7,260	M85×2.0	17.3	12.5	110	100	100	8	AN 17
GUK-90	8,090	M90×2.0	17.5	12.5	120	110	110	10	AN 18
GUK-95	9,080	M95×2.0	18.5	13.5	125	115	115	10	AN 19
GUK-100	9,900	M100×2.0	19.5	14.5	130	120	120	10	AN 20

SMP ロックナット

FAN アジャスタブルロックナット

独自のダイヤフラム機構によりナット自身で強力な弛みトルクが得られます。


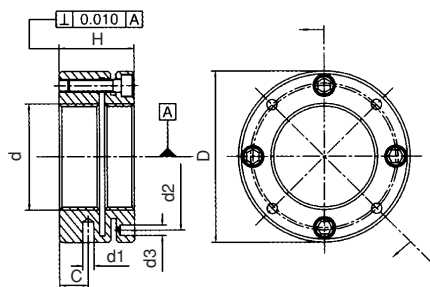


材質：S45C相当

品 番 ネジ径×ピッチ d×p	価 格	基 本 寸 法						d1と d3の 穴数	締付ボルト		
		D	H	d1	C	d2	d3		ネジ	本数	標準トルク N・m
FAN16×1.5	5,530	34	18	4	5	24.5	4.3	4	M4×12	4	3
FAN18×1.5	5,230	36	18	4	5	26.5	4.3	4	M4×12	4	3
FAN20×1.5	7,040	40	18	4	5	30.5	4.3	4	M4×12	4	3
FAN25×1.5	7,550	45	20	5	6.5	36.5	4.3	4	M4×12	4	3
FAN28×1.5	7,780	46	20	5	6.5	38.5	4.3	4	M4×12	4	3
FAN30×1.5	7,910	48	20	5	6.5	40.5	4.3	4	M4×12	4	3
FAN32×1.5	8,330	50	22	5	7	42.5	4.3	4	M4×16	4	3
FAN35×1.5	8,640	53	22	5	7	45.5	4.3	4	M4×16	4	3
FAN38×1.5	9,010	58	22	5	7	48.5	4.3	4	M4×16	4	3
FAN40×1.5	9,280	58	22	5	7	50.5	4.3	4	M4×16	4	3
FAN42×1.5	9,630	60	22	5	7	52.5	4.3	4	M4×16	4	3
FAN45×1.5	9,930	68	22	6	7	58.0	4.3	6	M4×16	6	3
FAN50×1.5	11,100	70	25	6	9	61.5	4.3	6	M4×18	6	3
FAN55×1.5	12,000	75	25	6	9	66.5	4.3	6	M4×18	6	3
FAN60×1.5	13,500	84	26	6	9	74.5	5.3	6	M5×18	6	6
FAN65×1.5	16,400	88	28	6	10.5	78.5	5.3	6	M5×20	6	6
FAN70×1.5	17,700	95	28	8	9.5	85.0	5.3	6	M5×20	6	6
FAN75×1.5	18,500	100	28	8	8.5	88.0	6.3	6	M6×20	6	10
FAN80×2.0	19,300	110	32	8	11	95.0	6.3	6	M6×22	6	10
FAN85×2.0	20,800	115	32	8	11	100.0	6.3	6	M6×22	6	10
FAN90×2.0	22,700	120	32	8	11	108.0	6.3	6	M6×22	6	10
FAN95×2.0	25,500	125	32	8	11	113.0	6.3	6	M6×22	6	10
FAN100×2.0	26,300	130	32	8	11	118.0	6.3	6	M6×22	6	10

SMP ロックナット

ZMタイプ 精密ロックナット



セットスクリュー位置 180°
末尾記号なし

材質：ナット SCM435
ブッシュ リン青銅C5191

右ネジ品番	価 格	d	φ D	φ d1	h	g	t	m
ZM-6	7,760	M6×0.5	16	12	8	3	2	M4
ZM-8	10,800	M8×0.75	16	11	8	3	2	M4
ZM-10×0.75	9,230	M10×0.75	18	13	8	3	2	M4
ZM-10×1.0	5,720	M10×1.0	18	13	8	3	2	M4
ZM-12	5,240	M12×1.0	22	18	8	3	2	M4
ZM-15	5,010	M15×1.0	25	21	8	3	2	M4
ZM-17	4,860	M17×1.0	28	23	10	4	2	M5
ZM-20	4,840	M20×1.0	32	27	10	4	2	M5
ZM-25A	5,350	M25×1.5	40	33	12	5	2	M6
ZM-30	5,640	M30×1.5	45	40	12	5	2	M6
ZM-35	6,010	M35×1.5	52	47	12	5	2	M6
ZM-40	6,550	M40×1.5	58	52	14	6	2.5	M6
ZM-45	7,450	M45×1.5	65	59	14	6	2.5	M6
ZM-50	8,360	M50×1.5	70	64	14	6	2.5	M6
ZM-55	9,170	M55×2.0	75	68	16	7	3	M6
ZM-60	9,680	M60×2.0	80	73	16	7	3	M6
ZM-65	10,000	M65×2.0	85	78	16	7	3	M6
ZM-70	12,300	M70×2.0	92	85	18	8	3.5	M8
ZM-75	13,100	M75×2.0	98	90	18	8	3.5	M8
ZM-80	14,500	M80×2.0	105	95	18	8	3.5	M8
ZM-85	16,700	M85×2.0	110	102	18	8	3.5	M8
ZM-90	18,200	M90×2.0	120	108	20	10	4	M8
ZM-95	19,700	M95×2.0	125	113	20	10	4	M8
ZM-100	20,600	M100×2.0	130	120	20	10	4	M8