


SMP 樹脂ベアリング

トックベアリング


■DR-B (外周フラットーネジ軸)




TYPE1



TYPE2



TYPE3



●M6ネジ軸タイプ




品 番	価 格			D	W	C	L	許容荷重 [N]	TYPE
	1～9個	10～49個	50個以上						
DR-19-B2-4.5	300	270	240	19	6	2	4.5	49	2
DR-19-B1-5.5	200	180	160	19	6	1	5.5	49	2
DR-19-B0.5	130	120	110	19	6	0.5	8	49	1
DR-19-B1	130	120	110	19	6	1	8	49	2
DR-19-B2	130	120	110	19	6	2	8	49	2
DR-19-B2.7	130	120	110	19	6	2.7	8	49	2
DR-19-B3.5	260	230	210	19	6	3.5	8	49	1
DR-19-B1-14	200	180	160	19	6	1	14	49	1
DR-22-B0.5-4.5	200	180	160	22	7	0.5	4.5	196	1
DR-22-B0.5	130	120	110	22	7	0.5	8	196	1
DR-22-B1	200	180	160	22	7	1	8	196	2
DR-22-B2	170	150	140	22	7	2	8	196	2
DR-22-B3	170	150	140	22	7	3	8	196	2
DR-22-B4	170	150	140	22	7	4	8	196	2
DR-22-B5	200	180	160	22	7	5	8	196	2
DR-22-B6	200	180	160	22	7	6	8	196	2
DR-22-B1-10	400	360	320	22	7	1	10	196	1
DR-22-B3-10.5	230	210	190	22	7	3	10.5	196	1
DR-22-BH2-11	260	230	210	22	7	2	11	196	3
DR-22-B3.6-12.4	200	180	160	22	7	3.6	12.4	196	1
DR-24-B0.5	130	120	110	24	7	0.5	8	196	1
DR-24-B2	200	180	160	24	7	2	8	196	2
DR-24-B3	200	180	160	24	7	3	8	196	2
DR-24-B4	200	180	160	24	7	4	8	196	2
DR-24-B5	200	180	160	24	7	5	8	196	2
DR-24-B6	200	180	160	24	7	6	8	196	2
DR-24-B3-10.5	260	230	210	24	7	3	10.5	196	1

※許容荷重：毎分300回転時

SMP 樹脂ベアリング

トックベアリング

■DR-B (外周フラットーネジ軸)






品 番	価 格			D	W	C	L	許容荷重 [N]	TYPE
	1～9個	10～49個	50個以上						
DR-26-B0.5-4.5	300	270	240	26	7	0.5	4.5	196	1
DR-26-B0.5	130	120	110	26	7	0.5	8	196	1
DR-26-B2	200	180	160	26	7	2	8	196	2
DR-26-B3	200	180	160	26	7	3	8	196	2
DR-26-B4	200	180	160	26	7	4	8	196	2
DR-26-B6	200	180	160	26	7	6	8	196	2
DR-26-B3-10.5	330	300	270	26	7	3	10.5	196	1
DR-26-BH2-11	300	270	240	26	7	2	11	196	3
DR-26-B3.6-12.4	300	270	240	26	7	3.6	12.4	196	1
DR-28-B0.5	300	270	240	28	7	0.5	8	196	1
DR-28-B2	260	230	210	28	7	2	8	196	2
DR-30-B0.5	300	270	240	30	7	0.5	8	196	1
DR-30-B3	300	270	240	30	7	3	8	196	2
DR-30-B3-10.5	330	300	270	30	7	3	10.5	196	1
DR-30-B3.6-12.4	330	300	270	30	7	3.6	12.4	196	1

※許容荷重：毎分300回転時

SMP 樹脂ベアリング

トックベアリング

DR-H (内軸穴)



品 番	価 格			D	d	W	W1 W2	許容荷重 [N]	TYPE
	1～9個	10～49個	50個以上						
DRS-16-H4.1W0.25	260	230	210	16	4.1	3.5	0.25	49	3
DR-18-H6	300	270	240	18	6	6	—	49	1
DR-18-H8	300	270	240	18	8	5	—	49	1
DR-19-H5	130	120	110	19	5	6	—	49	1
DR-19-H6	300	270	240	19	6	6	—	49	1
DR-20-H8	300	270	240	20	8	6	—	29.4	1
DR-22-H6	120	110	100	22	6	7	—	196	1
DR-22H6W1	200	180	160	22	6	7	1	196	2
DR-22-H8	260	230	210	22	8	7	—	49	1
DR-24-H10.5	300	270	240	24	10.5	7	—	49	1
DR-24-H6	130	120	110	24	6	7	—	196	1
DR-24-H6W1	200	180	160	24	6	7	1	196	2
DR-26-H6	130	120	110	26	6	7	—	196	1
DR-26-H6W1	170	150	140	26	6	7	1	196	2
DR-28-H6	260	230	210	28	6	7	—	196	1
DR-28-H6W1	330	300	270	28	6	7	1	196	2
DR-30-H10-8	300	270	240	30	10	8	—	245	1
DR-30-H10-9	650	580	520	30	10	9	—	245	1
DR-30-H6	260	230	210	30	6	7	—	196	1
DR-30-H6W1	300	270	240	30	6	7	1	196	2
DR-32-H12	760	680	610	32	12	10	—	294	1
DR-35-H15	890	800	720	35	15	11	—	294	1
DR-35-H6	300	270	240	35	6	7	—	196	1
DR-35-H6W1	300	270	240	35	6	7	1	196	2
DR-40-H17	1,090	980	880	40	17	12	—	294	1
DR-40-H6	430	390	350	40	6	8	—	196	1
DR-40-H6W0.5	400	360	320	40	6	8	0.5	196	2

※許容荷重：毎分300回転時


SMP 樹脂ベアリング

トックベアリング


DR-A (カシメ軸)




TYPE1




TYPE2



TYPE3



TYPE4




品 番	価 格			D	d1	W	C	L	d2×θ	A	許容荷重 [N]	TYPE
	1~9個	10~49個	50個以上									
DRS-16-A1	530	480	430	16	4	5	1	3.5	φ3×100°	—	19.6	1
DRS-16-A1.5	260	230	210	16	5	6.35	1.5	3.5	φ4.5×90°	—	19.6	1
DR-18-A0.5	300	270	240	18	5	6	0.5	3.5	φ4×120°	—	19.6	2
DR-19-A0.5	120	110	100	19	5	6	0.5	3.5	φ4×120°	—	29.4	2
DR-22-A1	120	110	100	22	5	7	1	3.5	φ4.4×90°	—	78.4	2
DR-22-A2	230	210	190	22	5	7	2	3.5	φ4×90°	—	78.4	2
DR-22-A2-6	230	210	190	22	6	7	2	3.5	φ5.5×90°	—	78.4	2
DR-22-AH2.5	200	180	160	22	5	7	2.5	3.5	φ4×110°	—	196	4
DR-22-AH2.5-3.65	200	180	160	22	4.5	7	2.5	3.65	φ2.3×110°	1	196	3
DR-22-AH35-8019	200	180	160	22	4.5	7	0	3.5	—	1	196	3
DR-24-A1	130	120	110	24	5	7	1	3.5	φ4.4×90°	—	78.4	2
DR-26-A1	130	120	110	26	5	7	1	3.5	φ4.4×90°	—	78.4	2
DR-26-AH	200	180	160	26	4.5	7	0	3.5	—	1	196	3
DR-26-AH2.5-3.65	230	210	190	26	4.5	7	2.5	3.65	φ2.4×110°	1	196	3
DR-28-A1	260	230	210	28	5	7	1	3.5	φ4.4×90°	—	78.4	2

※許容荷重：毎分300回転時

SMP 樹脂ベアリング

トックベアリング

DO (外周凸R)

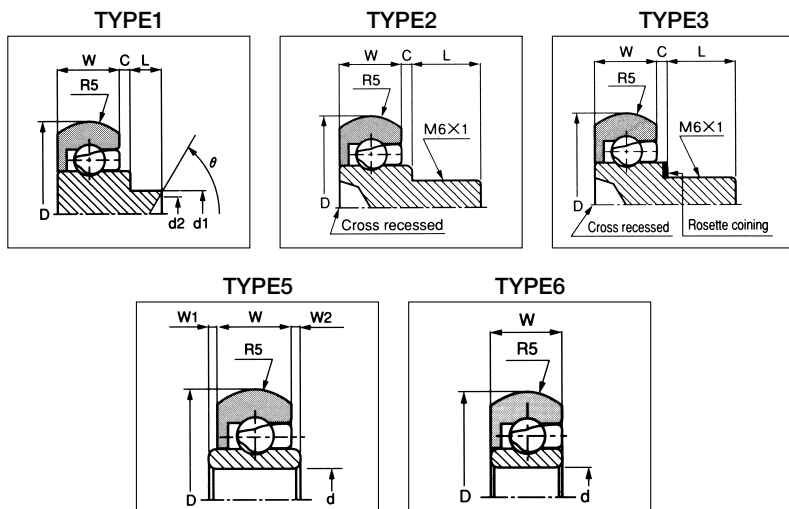




品 番	価 格			D	d	d1	W	C	L	d2×θ	W1 W2	許容荷重 [N]	TYPE
	1~9個	10~49個	50個以上										
DO-19-A0.5	230	210	190	19	—	5	6	0.5	3.5	φ4×120°	—	29.4	1
DO-22-A1	170	150	140	22	—	5	7	1	3.5	φ4.4×90°	—	78.4	1
DO-24-A1	170	150	140	24	—	5	7	1	3.4	φ4.4×90°	—	78.4	1
DO-26-A1	200	180	160	26	—	5	7	1	3.5	φ4.4×90°	—	78.4	1
DO-19-B0.5-4.5	300	270	240	19	—	—	6	0.5	4.5	—	—	49	2
DO-19-B0.5	230	210	190	19	—	—	6	0.5	8	—	—	49	2
DO-22-B0.5	170	150	140	22	—	—	7	0.5	8	—	—	196	2
DO-22-B5	200	180	160	22	—	—	7	5	8	—	—	196	3
DO-22-B3-10.5	260	230	210	22	—	—	7	3	10.5	—	—	196	2
DO-24-B0.5	200	180	160	24	—	—	7	0.5	8	—	—	196	2
DO-24-B2	260	230	210	24	—	—	7	2	8	—	—	196	3
DO-24-B3	200	180	160	24	—	—	7	3	8	—	—	196	3
DO-26-B0.5	230	210	190	26	—	—	7	0.5	8	—	—	196	2
DO-28-B0.5	260	230	210	28	—	—	7	0.5	8	—	—	196	2
DO-30-B3	460	410	370	30	—	—	7	3	8	—	—	196	3
DO-19-H5	170	150	140	19	5	—	6	—	—	—	—	49	6
DO-22-H6	170	150	140	22	6	—	7	—	—	—	—	196	6
DO-24-H6	200	180	160	24	6	—	7	—	—	—	—	196	6
DO-24-H6W1	200	180	160	24	6	—	7	—	—	—	1	196	5
DO-26-H6	200	180	160	26	6	—	7	—	—	—	—	196	6
DO-26-H6W1	230	210	190	26	6	—	7	—	—	—	1	196	5
DO-28-H6	300	270	240	28	6	—	7	—	—	—	—	196	6
DO-40-H6W0.5	590	530	480	40	6	—	8	—	—	—	0.5	196	5

※許容荷重：毎分300回転時

SMP 樹脂ベアリング

トックベアリング




DF (片側フランジ)



品 番	価 格			D	D1	d	W	W1	C	L	許容荷重1 [N]	許容荷重2 [N]	TYPE
	1~9個	10~49個	50個以上										
DF-17-B0.5	500	450	410	17	19	—	6	1	0.5	8	49	—	1
DF-22-B0.5	330	300	270	22	26	—	7	2	0.5	8	196	—	1
DF-26-B1	300	270	240	26	32	—	11	3	1	8	196	—	2
DF-26-B2	330	300	270	26	32	—	11	3	2	8	196	—	2
DF-17-H6	260	230	210	17	19	6	6	1	—	—	49	14.7	3
DF-22-H6	400	360	320	22	26	6	7	2	—	—	196	39.2	3


※許容荷重1：外輪回転毎分300回転時 許容荷重2：内輪回転毎分300回転時

DH (外周凹溝)



品 番	価 格			D	D1	d	d1	W	C	L	d2×θ	G	TYPE
	1~9個	10~49個	50個以上										
DH-16-A0.5	460	410	370	19	16	—	5	6	0.5	3.5	φ4×120°	2.1	1
DH-16-B0.5	430	390	350	19	16	—	—	6	0.5	8	—	2.1	2
DH-16-B1	500	450	410	19	16	—	—	6	1	8	—	2.1	2
DH-19-B0.5-2	430	390	350	22	19	—	—	7	0.5	8	—	2	2
DH-16-H5	430	390	350	19	16	5	—	6	—	—	—	2.1	3
DH-19-H6-2	500	450	410	22	19	6	—	7	—	—	—	2	3
DH-19-H6-2.5	530	480	430	22	19	6	—	7	—	—	—	2.5	3

DU (外周U溝)



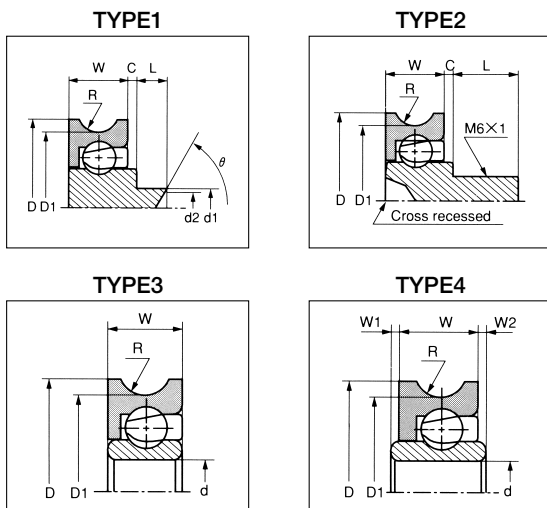


品 番	価 格			D	D1	d	d1	W	C	L	d2×θ	W1 W2	R	TYPE
	1~9個	10~49個	50個以上											
DU-19-A0.5	170	150	140	19	17	—	5	6	0.5	3.5	φ4×120°	—	1.75	1
DU-22-A1	170	150	140	22	19.2	—	5	7	1	3.5	φ4.4×90°	—	2.5	1
DU-24-A1	200	180	160	24	21.2	—	5	7	1	3.5	φ4.4×90°	—	2.5	1
DU-26-A1	200	180	160	26	23.2	—	5	7	1	3.5	φ4.4×90°	—	2.5	1
DU-19-B0.5	170	150	140	19	17	—	—	6	0.5	8	—	—	1.75	2
DU-19-B2	200	180	160	19	17	—	—	6	2	8	—	—	1.75	2
DU-22-B0.5	170	150	140	22	19.2	—	—	7	0.5	8	—	—	2.5	2
DU-22-B6	260	230	210	22	19.2	—	—	7	6	8	—	—	2.5	2
DU-24-B0.5	200	180	160	24	21.2	—	—	7	0.5	8	—	—	2.5	2
DU-26-B0.5	200	180	160	26	23.2	—	—	7	0.5	8	—	—	2.5	2
DU-19-H5	200	180	160	19	17	5	—	6	—	—	—	—	1.75	3
DU-22-H6	200	180	160	22	19.2	6	—	7	—	—	—	—	2.5	3
DU-22-H6W1	230	210	190	22	19.2	6	—	7	—	—	—	1	2.5	4
DU-24-H6	200	180	160	24	21.2	6	—	7	—	—	—	—	2.5	3
DU-26-H6	200	180	160	26	23.2	6	—	7	—	—	—	—	2.5	3
DU-30-H6-M	300	270	240	30	25.7	6	—	7	—	—	—	—	2.5	3
DU-35-H6W1	460	410	370	35	31	6	—	7	—	—	—	1	2.5	4
DU-40-H6W0.5	360	320	290	40	36	6	—	8	—	—	—	0.5	2.5	4

SMP 樹脂ベアリング

トックベアリング

■DV (外周V溝)




品 番	価 格			D	D1	d	d1	W	C	L	d2×θ	M°	R	TYPE
	1~9個	10~49個	50個以上											
DV-19-A0.5	260	230	210	19	17	—	5	6	0.5	3.5	φ4×120°	60	0.6	1
DV-26-A1	300	270	240	26	23	—	5	7	1	3.5	φ4.4×90°	60	0.6	1
DV-30-A1	430	390	350	30	27	—	5	7	1	3.5	φ4.4×90°	60	0.6	1
DV-38-A0.5	530	480	430	38	35	—	5	8	0.5	3.5	φ4.4×90°	60	0.6	1
DV-19-B0.5	260	230	210	19	17	—	—	6	0.5	8	—	60	0.6	2
DV-22-B0.5	230	210	190	22	19	—	—	7	0.5	8	—	60	0.6	2
DV-24-B0.5	260	230	210	24	21	—	—	7	0.5	8	—	60	0.6	2
DV-26-B0.5	300	270	240	26	23	—	—	7	0.5	8	—	60	0.6	2
DV-30-B0.5-0.5R	560	500	450	30	28	—	—	7	0.5	8	—	90	0.5	2
DV-32.5-B1.5-2R	460	410	370	32.5	20.5	—	—	9.5	1.5	8	—	15	2	2
DV-19-H5	260	230	210	19	17	5	—	6	—	—	—	60	0.6	3
DV-22-H6-M	200	180	160	22	19	6	—	7	—	—	—	60	0.6	3
DV-24-H6	260	230	210	24	21	6	—	7	—	—	—	60	0.6	3
DV-26-H6	460	410	370	26	23	6	—	7	—	—	—	60	0.6	3
DV-30-H6	360	320	290	30	27	6	—	7	—	—	—	60	0.6	3

SMP 樹脂ベアリング

トックベアリング

IDS (スチールインサート)

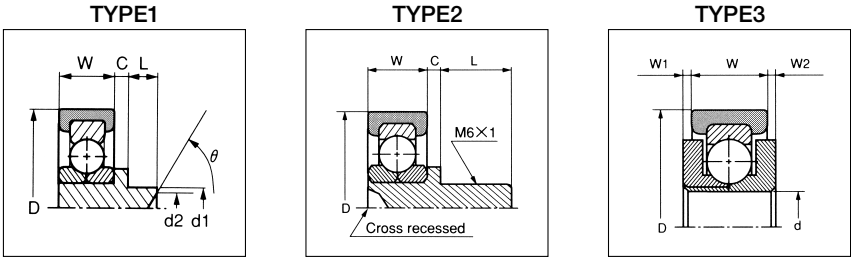

品 番	価 格			D	d	d1	W	C	L	d2×θ	W1 W2	許容荷重 [N]	TYPE
	1~9個	10~49個	50個以上										
IDS-22-A2.5	360	320	290	22	—	5	7	2.5	3.5	—	—	392	1
IDS-26-A1.5	400	360	320	26	—	6	8	1.5	3.5	φ5.5×90°	—	588	1
IDS-22-B1.5-11	400	360	320	22	—	—	7	1.5	11	—	—	392	2
IDS-26-B5-9	400	360	320	26	—	—	8	5	9	—	—	588	2
IDS-26-B2-11	430	390	350	26	—	—	8	2	11	—	—	588	2
IDS-30-B2-11	660	590	530	30	—	—	9	2	11	—	—	588	2
IDS-26-H6.35W0.8	430	390	350	26	6.35	—	8	—	—	—	0.8	294	5
IDS-35-H6.35W0.26	560	500	450	35	6.35	—	9	—	—	—	0.26	294	5


※許容荷重：毎分300回転時

SMP 樹脂ベアリング

トックベアリング

PE (耐薬品性)

超高分子量ポリエチレン




品 番	価 格			D	d	W	ボール材質
	1～9個	10～49個	50個以上				
PE-26-PHP10	1,740	1,570	1,410	26	10	8	P：ポリエチレン
PE-30-GHP10	5,580	5,020	4,520	30	10	9	G：ガラス
PE-30-PHP10	1,950	1,760	1,580	30	10	9	P：ポリエチレン
PE-32-PHP12	2,330	2,100	1,890	32	12	10	P：ポリエチレン
PE-35-PHP15	2,570	2,310	2,080	35	15	11	P：ポリエチレン
PE-35-SHP15	2,570	2,310	2,080	35	15	11	S：ステンレス鋼
PE-47-PHP20	2,820	2,540	2,290	47	20	14	P：ポリエチレン

DR-S (耐水性)

アウターレース：ポリアセタール樹脂

インナーレース：ステンレス

ボール：ステンレス



品 番	価 格			D	d	W	許容荷重 [N]
	1～9個	10～49個	50個以上				
DR-18-SHS6	1,400	1,260	1,130	18	6	6	—
DR-22-SHS6	1,090	980	880	22	6	7	—
DR-22-SHS8	1,180	1,060	950	22	8	7	—
DR-26-SHS10	2,020	1,820	1,640	26	10	8	98
DR-30-SHS10	930	840	760	30	10	9	147
DR-32-SHS12	1,090	980	880	32	12	10	176
DR-35-SHS15	1,300	1,170	1,050	35	15	11	176
DR-40-SHS17	1,950	1,760	1,580	40	17	12	205
DR-47-SHS20	2,110	1,900	1,710	47	20	14	235