


SMP トーションばね

アキュレイト



A (90°)



B (135°)



C (180°)

ご注文の際は、末尾に自由角度の記号をお付け下さい。

●材質:SUS304WPB、 ●巻方向:右巻き


品 番	価 格 (1パック)	バック 入数	内径 (mm)	線径 (mm)	アーム長 (mm)	巻数	ばね定数 N・mm/deg	許容変位量 deg
T-001	3,000	20	3.0	0.3	12	2	0.05	56
T-002						3	0.04	82
T-003						4	0.03	108
T-004						5	0.02	135
T-005	3,000	20	3.0	0.4	12	2	0.15	43
T-006						3	0.11	63
T-007						4	0.09	84
T-008						5	0.07	104
T-009	3,000	20	3.0	0.5	12	2	0.36	36
T-010						3	0.26	52
T-011						4	0.20	69
T-012						5	0.17	86
T-013	3,000	20	4.0	0.4	16	2	0.12	56
T-014						3	0.08	82
T-015						4	0.07	108
T-016						5	0.05	135
T-017	3,000	20	4.0	0.5	16	2	0.28	44
T-018						3	0.20	64
T-019						4	0.16	84
T-020						5	0.13	105
T-021	3,000	20	4.0	0.6	16	2	0.57	37
T-022						3	0.41	55
T-023						4	0.32	72
T-024						5	0.26	89
T-025	3,000	20	5.0	0.5	20	2	0.23	53
T-026						3	0.16	78
T-027						4	0.13	103
T-028						5	0.10	128
T-029	3,000	20	5.0	0.6	20	2	0.47	45
T-030						3	0.34	66
T-031						4	0.26	88
T-032						5	0.21	109

●材質:SUS304WPB、 ●巻方向:右巻き

品 番	価 格 (1/パック)	バック 入数	内径 (mm)	線径 (mm)	アーム長 (mm)	巻数	ばね定数 N・mm/deg	許容変位量 deg
T-033	3,000	20	5.0	0.8	20	2	1.44	33
T-034						3	1.03	49
T-035						4	0.80	65
T-036						5	0.65	80
T-037	3,000	10	6.0	0.6	24	2	0.40	53
T-038						3	0.28	78
T-039						4	0.22	103
T-040						5	0.18	128
T-041	3,000	10	6.0	0.8	24	2	1.23	39
T-042						3	0.87	57
T-043						4	0.68	76
T-044						5	0.56	94
T-045	3,000	10	6.0	1.0	24	2	2.91	32
T-046						3	2.08	47
T-047						4	1.62	62
T-048						5	1.32	78
T-049	3,000	10	7.0	0.7	28	2	0.63	51
T-050						3	0.45	74
T-051						4	0.35	98
T-052						5	0.29	122
T-053	3,000	10	7.0	0.9	28	2	1.69	40
T-054						3	1.21	59
T-055						4	0.94	78
T-056						5	0.77	97
T-057	3,000	10	7.0	1.2	28	2	5.17	30
T-058						3	3.69	44
T-059						4	2.86	58
T-060						5	2.34	72
T-061	3,000	10	8.0	0.8	32	2	0.94	51
T-062						3	0.67	74
T-063						4	0.52	98
T-064						5	0.43	122
T-065	3,000	10	8.0	0.9	32	2	1.49	45
T-066						3	1.07	67
T-067						4	0.83	88
T-068						5	0.68	110

SMP トーションばね

アキュレイト

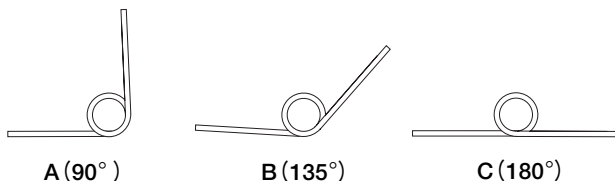

ご注文の際は、末尾に自由角度の記号をお付け下さい。

●材質:SUS304WPB、 ●巻方向:右巻き

品 番	価 格 (1パック)	バック 入数	内径 (mm)	線径 (mm)	アーム長 (mm)	巻数	ばね定数 N・mm/deg	許容変位量 deg
T-069	3,000	10	8.0	1.2	32	2	4.59	33
T-070						3	3.28	49
T-071						4	2.55	65
T-072						5	2.09	80
T-073	3,000	5	9.0	0.9	36	2	1.34	51
T-074						3	0.96	74
T-075						4	0.75	98
T-076						5	0.61	122
T-077	3,000	5	9.0	1.2	36	2	4.13	37
T-078						3	2.95	54
T-079						4	2.29	72
T-080						5	1.88	89
T-081	3,000	5	9.0	1.4	36	2	7.53	32
T-082						3	5.37	48
T-083						4	4.18	63
T-084						5	3.42	78
T-085	3,000	5	10.0	1.0	40	2	1.84	51
T-086						3	1.31	74
T-087						4	1.02	98
T-088						5	0.84	122
T-089	3,000	5	10.0	1.4	40	2	6.85	35
T-090						3	4.89	52
T-091						4	3.80	69
T-092						5	3.12	85
T-093	3,000	5	10.0	1.6	40	2	11.52	30
T-094						3	8.23	44
T-095						4	6.39	58
T-096						5	5.23	72

●材質:SUS304WPB、 ●巻方向:右巻き

品 番	価 格 (1/パック)	バック 入数	内径 (mm)	線径 (mm)	アーム長 (mm)	巻数	ばね定数 N・mm/deg	許容変位量 deg
T-097	3,000	2	12.0	1.2	48	2	3.18	48
T-098						3	2.28	70
T-099						4	1.77	93
T-100						5	1.45	115
T-101	3,000	2	12.0	1.6	48	2	9.80	35
T-102						3	7.00	51
T-103						4	5.44	68
T-104						5	4.45	84
T-105	3,000	2	12.0	1.8	48	2	15.49	32
T-106						3	11.06	46
T-107						4	8.60	61
T-108						5	7.03	76
T-109	3,000	2	14.0	1.4	56	2	5.05	48
T-110						3	3.61	70
T-111						4	2.81	93
T-112						5	2.30	115
T-113	3,000	2	14.0	1.8	56	2	13.50	36
T-114						3	9.64	53
T-115						4	7.50	70
T-116						5	6.14	87
T-117	3,000	2	14.0	2.0	56	2	20.36	33
T-118						3	14.53	48
T-119						4	11.30	64
T-120						5	9.25	79