


SMP V-リング

FORSHEDA V-リング

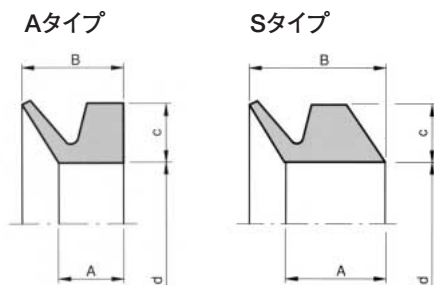

●Aタイプ

材質:NBR(ニトリルゴム)

品 番	価 格			内 径 d	断面高さ c	寸 法 A	断面幅 B
	1～9個	10～49個	50個以上				
V-3A	420	380	340	2.5	1.5	2.1	3
V-4A	420	380	340	3.2	2	2.4	3.7
V-5A	470	420	380	4			
V-6A	470	420	380	5			
V-7A	510	460	410	6			
V-8A	510	460	410	7			
V-10A	560	500	450	9	3	3.4	5.5
V-12A	560	500	450	10.5			
V-13A	580	520	460	11.7			
V-14A	580	520	460	12.5			
V-16A	610	550	490	14			
V-18A	630	570	500	16	4	4.7	7.5
V-20A	680	610	540	18			
V-22A	720	650	580	20			
V-25A	750	680	600	22			
V-28A	770	690	620	25			
V-30A	790	710	630	27			
V-32A	820	740	660	29			
V-35A	840	760	670	31	5	5.5	9
V-38A	890	800	710	34			
V-40A	930	840	740	36			
V-45A	1,030	930	820	40			
V-50A	1,140	1,030	910	45			
V-55A	1,190	1,070	950	49			
V-60A	1,310	1,180	1,050	54			
V-65A	1,400	1,260	1,120	58			

SMP V-リング

FORSHEDA V-リング

●Aタイプ

材質:NBR(ニトリルゴム)

品 番	価 格			内 径 d	断面高さ c	寸 法 A	断面幅 B
	1～9個	10～49個	50個以上				
V-70A	1,520	1,370	1,220	63	6	6.8	11
V-75A	1,630	1,470	1,300	67			
V-80A	1,770	1,590	1,420	72			
V-85A	1,910	1,720	1,530	76			
V-90A	2,050	1,850	1,640	81			
V-95A	2,100	1,890	1,680	85			
V-100A	2,170	1,950	1,740	90			
V-110A	2,990	2,690	2,390	99	7	7.9	12.8
V-120A	3,660	3,290	2,930	108			
V-130A	4,500	4,050	3,600	117			
V-140A	5,410	4,870	4,330	126			
V-150A	5,950	5,360	4,760	135			
V-160A	9,080	8,170	7,260	144	8	9	14.5
V-170A	10,300	9,300	8,240	153			
V-180A	11,600	10,400	9,300	162			
V-190A	11,800	10,600	9,400	171			
V-199A	13,500	12,200	10,800	180			
V-200A	14,200	12,800	11,400	180	15	14.3	25
V-220A	18,200	16,400	14,600	198			
V-250A	21,900	19,700	17,500	225			
V-275A	26,200	23,600	21,000	247			
V-300A	36,400	32,800	29,100	270			

SMP V-リング

■ FORSHEDA V-リング

●Sタイプ

材質:NBR(ニトリルゴム)

品 番	価 格			内 径 d	断面高さ c	寸 法 A	断面幅 B
	1～9個	10～49個	50個以上				
V-5S	470	420	380	4	2	3.9	5.2
V-6S	470	420	380	5			
V-7S	510	460	410	6			
V-8S	510	460	410	7			
V-10S	560	500	450	9	3	5.6	7.7
V-12S	560	500	450	10.5			
V-14S	580	520	460	12.5			
V-16S	610	550	490	14			
V-18S	630	570	500	16			
V-20S	680	610	540	18			
V-22S	720	650	580	20	4	7.9	10.5
V-25S	750	680	600	22			
V-28S	770	690	620	25			
V-30S	790	710	630	27			
V-32S	820	740	660	29			
V-35S	840	760	670	31			
V-38S	890	800	710	34			
V-40S	930	840	740	36	5	9.5	13
V-45S	1,030	930	820	40			
V-50S	1,140	1,030	910	45			
V-55S	1,190	1,070	950	49			
V-60S	1,310	1,180	1,050	54			
V-65S	1,400	1,260	1,120	58			
V-70S	1,520	1,370	1,220	63	6	11.3	15.5
V-75S	1,630	1,470	1,300	67			
V-80S	1,770	1,590	1,420	72			
V-85S	1,910	1,720	1,530	76			
V-90S	2,050	1,850	1,640	81			
V-95S	2,100	1,890	1,680	85			
V-100S	2,170	1,950	1,740	90			
V-110S	2,990	2,690	2,390	99	7	13.1	18
V-120S	3,660	3,290	2,930	108			
V-130S	4,500	4,050	3,600	117			
V-140S	5,410	4,870	4,330	126			
V-150S	5,950	5,360	4,760	135			
V-160S	9,080	8,170	7,260	144	8	15	20.5
V-170S	10,300	9,300	8,240	153			
V-180S	11,600	10,400	9,300	162			
V-190S	11,800	10,600	9,400	171			
V-199S	13,500	12,200	10,800	180			