


SMP Oリング

■P (運動用パッキン)

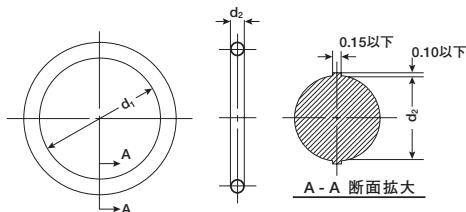

●ニトリルゴム NBR (1AHS70)

●バイトン (フッ素ゴム) (4D黒)

品 番	価 格			品 番	価 格			内径	線径
	1~9個	10~49個	50個以上		1~9個	10~49個	50個以上	d1	d2 許容差
P-3	20	16	12	VP-3	60	48	36	2.8	1.9
P-4	20	16	12	VP-4	60	48	36	3.8	
P-5	20	16	12	VP-5	90	72	54	4.8	
P-6	20	16	12	VP-6	90	72	54	5.8	
P-7	20	16	12	VP-7	100	80	60	6.8	
P-8	20	16	12	VP-8	140	112	84	7.8	
P-9	20	16	12	VP-9	140	112	84	8.8	
P-10	25	20	15	VP-10	160	128	96	9.8	
P-10A	30	24	18	VP-10A	200	160	120	9.8	
P-11	30	24	18	VP-11	160	128	96	10.8	2.4
P-11.2	30	24	18	VP-11.2	180	144	108	11	
P-12	30	24	18	VP-12	180	144	108	11.8	
P-12.5	30	24	18	VP-12.5	190	152	114	12.3	
P-14	30	24	18	VP-14	190	152	114	13.8	
P-15	30	24	18	VP-15	200	160	120	14.8	
P-16	40	32	24	VP-16	200	160	120	15.8	
P-18	40	32	24	VP-18	220	175	130	17.8	
P-20	40	32	24	VP-20	220	175	130	19.8	
P-21	45	36	27	VP-21	250	200	150	20.8	3.5
P-22	45	36	27	VP-22	250	200	150	21.8	
P-22A	55	44	33	VP-22A	280	225	170	21.7	
P-22.4	55	44	33	VP-22.4	350	280	210	22.1	
P-24	55	44	33	VP-24	350	280	210	23.7	
P-25	55	44	33	VP-25	350	280	210	24.7	
P-25.5	55	44	33	VP-25.5	360	290	215	25.2	
P-26	60	48	36	VP-26	360	290	215	25.7	
P-28	60	48	36	VP-28	380	305	230	27.7	
P-29	65	52	39	VP-29	380	305	230	28.7	
P-29.5	65	52	39	VP-29.5	430	345	260	29.2	
P-30	65	52	39	VP-30	430	345	260	29.7	
P-31	70	56	42	VP-31	450	360	270	30.7	
P-31.5	70	56	42	VP-31.5	450	360	270	31.2	
P-32	70	56	42	VP-32	470	375	280	31.7	
P-34	70	56	42	VP-34	470	375	280	33.7	
P-35	80	64	48	VP-35	490	390	295	34.7	
P-35.5	80	64	48	VP-35.5	490	390	295	35.2	
P-36	80	64	48	VP-36	530	425	320	35.7	
P-38	80	64	48	VP-38	530	425	320	37.7	
P-39	80	64	48	VP-39	560	450	335	38.7	
P-40	90	72	54	VP-40	560	450	335	39.7	

SMP オリング

■P (運動用パッキン)


●ニトリルゴム NBR (1AHS70)

●バイトン (フッ素ゴム) (4D黒)

品 番	価 格			品 番	価 格			内径	線径
	1~9個	10~49個	50個以上		1~9個	10~49個	50個以上	d1	d2 許容差
P-41	90	72	54	VP-41	580	465	350	40.7	3.5
P-42	100	80	60	VP-42	580	465	350	41.7	
P-44	100	80	60	VP-44	590	470	355	43.7	
P-45	100	80	60	VP-45	590	470	355	44.7	
P-46	110	88	66	VP-46	590	470	355	45.7	
P-48	110	88	66	VP-48	610	450	365	47.7	
P-48A	130	104	78	VP-48A	1,210	970	725	47.7	
P-49	130	104	78	VP-49	660	530	395	48.7	
P-50	130	104	78	VP-50	660	530	395	49.7	
P-50A	155	124	93	VP-50A	1,210	970	725	49.6	5.7
P-52	155	124	93	VP-52	1,270	1,010	760	51.6	
P-53	160	128	96	VP-53	1,270	1,010	760	52.6	
P-55	160	128	96	VP-55	1,320	1,050	790	54.6	
P-56	160	128	96	VP-56	1,320	1,050	790	55.6	
P-58	160	128	96	VP-58	1,370	1,090	820	57.6	
P-60	170	136	102	VP-60	1,370	1,090	820	59.6	
P-62	170	136	102	VP-62	1,480	1,180	880	61.6	
P-63	170	136	102	VP-63	1,480	1,180	880	62.6	
P-65	170	136	102	VP-65	1,590	1,270	950	64.6	
P-67	175	140	105	VP-67	1,590	1,270	950	66.6	
P-70	190	152	114	VP-70	1,790	1,430	1,070	69.6	
P-71	190	152	114	VP-71	1,790	1,430	1,070	70.6	
P-75	200	160	120	VP-75	1,880	1,500	1,120	74.6	
P-80	210	168	126	VP-80	1,880	1,500	1,120	79.6	
P-85	220	176	132	VP-85	2,080	1,660	1,240	84.6	
P-90	230	184	138	VP-90	2,080	1,660	1,240	89.6	
P-95	230	184	138	VP-95	2,370	1,890	1,420	94.6	
P-100	250	200	150	VP-100	2,370	1,890	1,420	99.6	
P-105	290	230	175	VP-105	2,770	2,210	1,660	104.6	8.4
P-110	290	230	175	VP-110	3,060	2,440	1,830	109.6	
P-115	310	250	185	VP-115	3,160	2,520	1,890	114.6	
P-120	325	260	195	VP-120	3,160	2,520	1,890	119.6	
P-125	325	260	195	VP-125	3,460	2,760	2,070	124.6	
P-130	325	260	195	VP-130	3,460	1,760	1,070	129.6	
P-135	350	280	210	VP-135	3,760	3,000	2,250	134.6	
P-140	370	295	220	VP-140	3,960	3,160	2,370	139.6	
P-145	370	295	220	VP-145	3,960	3,160	2,370	144.6	
P-150	430	345	260	VP-150	4,160	3,330	2,500	149.6	
P-155	540	430	325	VP-155	4,910	3,920	2,940	154.5	8.4
P-160	545	435	330	VP-160	5,780	4,620	3,460	159.5	
P-165	545	435	330	VP-165	5,780	4,620	3,460	164.5	
P-170	580	465	350	VP-170	6,420	5,130	3,850	169.5	
P-175	580	465	350	VP-175	6,420	5,130	3,850	174.5	
P-180	635	510	380	VP-180	7,130	5,700	4,270	179.5	
P-185	635	510	380	VP-185	7,130	5,700	4,270	184.5	
P-190	635	510	380	VP-190	7,420	5,930	4,450	189.5	
P-195	685	550	410	VP-195	7,420	5,930	4,450	194.5	
P-200	685	550	410	VP-200	7,850	6,280	4,710	199.5	

SMP Oリング

G (固定用ガスケット)

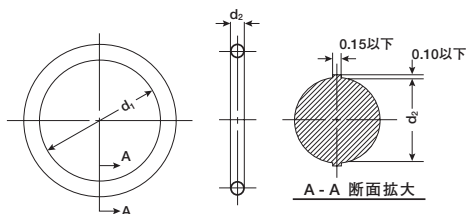


●ニトリルゴム NBR (1AHS70)

●バイトン (フッ素ゴム) (4D黒)

品 番	価 格			品 番	価 格			内径	線径
	1~9個	10~49個	50個以上		1~9個	10~49個	50個以上	d1	d2 許容差
G-25	50	40	30	VG-25	330	265	230	24.4	3.1
G-30	50	40	30	VG-30	420	335	295	29.4	
G-35	60	48	36	VG-35	450	360	315	34.4	
G-40	80	64	48	VG-40	540	430	375	39.4	
G-45	80	64	48	VG-45	550	440	385	44.4	
G-50	100	80	60	VG-50	590	470	415	49.4	
G-55	110	88	66	VG-55	630	505	440	54.4	
G-60	120	96	72	VG-60	730	585	510	59.4	
G-65	130	104	78	VG-65	830	665	580	64.4	
G-70	140	112	84	VG-70	880	705	615	69.4	
G-75	140	112	84	VG-75	1,010	810	705	74.4	
G-80	160	128	96	VG-80	1,010	810	705	79.4	
G-85	160	128	96	VG-85	1,050	840	735	84.4	
G-90	170	136	102	VG-90	1,050	840	735	89.4	
G-95	180	144	108	VG-95	1,270	1,020	890	94.4	
G-100	190	150	115	VG-100	1,270	1,020	890	99.4	
G-105	190	150	115	VG-105	1,430	1,140	1,000	104.4	
G-110	225	180	135	VG-110	1,430	1,140	1,000	109.4	
G-115	225	180	135	VG-115	1,590	1,270	1,110	114.4	
G-120	250	200	150	VG-120	1,590	1,270	1,110	119.4	
G-125	250	200	150	VG-125	1,690	1,350	1,180	124.4	5.7
G-130	265	210	160	VG-130	1,690	1,350	1,180	129.4	
G-135	265	210	160	VG-135	1,790	1,430	1,250	134.4	
G-140	285	230	170	VG-140	1,890	1,510	1,320	139.4	
G-145	285	230	170	VG-145	1,890	1,510	1,320	144.4	
G-150	435	350	265	VG-150	3,330	2,660	2,330	149.3	
G-155	440	350	265	—	—	—	—	154.3	
G-160	440	350	265	—	—	—	—	159.3	
G-165	440	350	265	—	—	—	—	164.3	
G-170	600	480	360	—	—	—	—	169.3	
G-175	600	480	360	—	—	—	—	174.3	
G-180	610	490	365	—	—	—	—	179.3	
G-185	675	540	405	—	—	—	—	184.3	
G-190	630	505	380	—	—	—	—	189.3	
G-195	655	525	395	—	—	—	—	194.3	
G-200	705	565	425	—	—	—	—	199.3	
G-210	720	575	430	—	—	—	—	209.3	
G-220	740	590	445	—	—	—	—	219.3	
G-230	720	575	430	—	—	—	—	229.3	
G-240	750	600	450	—	—	—	—	239.3	
G-250	765	610	460	—	—	—	—	249.3	
G-260	800	640	480	—	—	—	—	259.3	
G-270	760	600	455	—	—	—	—	269.3	
G-290	870	690	520	—	—	—	—	289.3	

SMP Oリング

V (真空フランジ用)

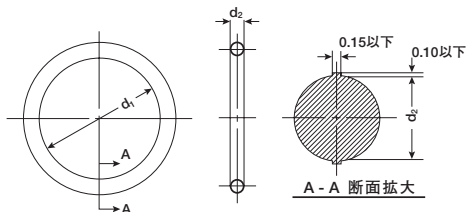

●ニトリルゴム NBR (1AHS70) ●バイトン (フッ素ゴム) (4D黒)

品 番	価 格			品 番	価 格			内径	線径
	1~9個	10~49個	50個以上		1~9個	10~49個	50個以上	d1	d2 許容差
V-15	70	56	49	VV-15	520	415	365	14.5	4
V-24	100	80	70	VV-24	630	505	440	23.5	
V-34	120	96	84	VV-34	710	570	495	33.5	
V-40	150	120	105	VV-40	810	650	565	39.5	
V-55	220	175	155	VV-55	1,090	870	765	54.5	
V-70	270	215	190	VV-70	1,320	1,050	920	69	
V-85	330	265	230	VV-85	1,560	1,240	1,090	84	
V-100	365	290	255	VV-100	1,810	1,440	1,260	99	
V-120	450	360	315	VV-120	2,060	1,640	1,440	119	
V-150	375	300	265	VV-150	2,780	2,220	1,940	148.5	
V-175	580	465	405	VV-175	3,490	2,790	2,440	173	6
V-225	780	625	545	VV-225	7,080	5,660	4,950	222.5	
V-275	965	770	675	VV-275	8,640	6,910	6,040	272	
V-325	1,080	860	755	VV-325	10,870	8,690	7,600	321.5	
V-380	1,310	1,050	910	VV-380	13,390	10,700	9,370	376	
V-430	1,740	1,390	1,220	VV-430	14,900	11,900	10,400	425.5	

S (固定用)

●ニトリルゴム NBR (1AHS70)

品 番	価 格			内径	線径
	1~9個	10~49個	50個以上	d1	d2 許容差
S-4	30	24	21	3.5	1.5
S-5	30	24	21	4.5	
S-6	30	24	21	5.5	
S-7	30	24	21	6.5	
S-8	30	24	21	7.5	
S-10	30	24	21	9.5	
S-11.2	50	40	35	10.7	
S-12	50	40	35	11.5	
S-12.5	50	40	35	12.0	
S-14	55	44	39	13.5	
S-15	55	44	39	14.5	2.0
S-16	55	44	39	15.5	
S-18	55	44	39	17.5	
S-20	55	44	39	19.5	
S-22	60	48	42	21.5	
S-22.4	60	48	42	21.9	
S-24	60	48	42	23.5	
S-25	60	48	42	24.5	
S-30	70	56	49	29.5	
S-32	70	56	49	31.5	
S-34	70	56	49	33.5	
S-35	80	64	56	34.5	

品 番	価 格			内径	線径
	1~9個	10~49個	50個以上	d1	d2 許容差
S-36	80	64	56	35.5	2.0
S-39	90	72	63	38.5	
S-40	90	72	63	39.5	
S-42	100	80	70	41.5	
S-44	100	80	70	43.5	
S-45	100	80	70	44.5	
S-48	110	88	77	47.5	
S-50	110	88	77	49.5	
S-53	140	112	98	52.5	
S-55	140	112	98	54.5	
S-56	140	112	98	55.5	2.0
S-60	140	112	98	59.5	
S-63	155	125	110	62.5	
S-65	155	125	110	64.5	
S-67	155	125	110	66.5	
S-70	180	145	125	69.5	
S-71	180	145	125	70.5	
S-75	185	150	130	74.5	
S-85	210	170	145	84.5	
S-90	210	170	145	89.5	
S-95	250	200	175	94.5	
S-100	250	200	175	99.5	