


標準タイプ

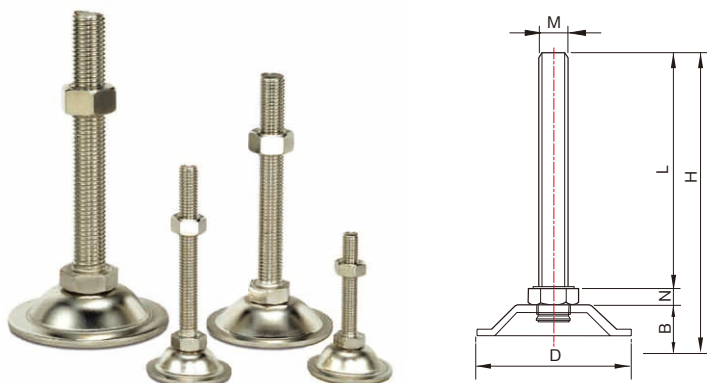

TM

- 材 質：ボルト 機械構造用炭素鋼(S10C相当)
受 皿 熱間圧延鋼板(SPHC)
- 表面処理：ニッケルメッキ

TM...SC

- 材 質：ボルト 機械構造用炭素鋼(S10C相当)
受 皿 熱間圧延鋼板(SPHC)
- 表面処理：三価クロメート

TSM


- 材 質：ボルト ステンレス鋼棒(SUS304)
受 皿 ステンレス鋼板(SUS304)
- 表面処理：パシペート

● TM/TM...SC

● TSM

標準品／三価クロメート品			ステンレス(SUS304)			主 要 寸 法						耐荷重 (4本/kg)
品 番	価 格	板厚	品 番	価 格	板厚	M	L	H	D	N	B	
TM0640 (SC)	200	2.0t	TSM0640	400	2.0t	M6×1.0	40	55	36	6	9	100
TM0840 (SC)	220	2.0t	TSM0840	440	2.0t	M8×1.25	40	55	36	6	9	200
TM0880 (SC)	240	2.0t	TSM0880	530	2.0t	M8×1.25	80	95	36	6	9	200
TM1060 (SC)	260	2.6t	TSM1060	670	2.5t	M10×1.5	60	82	50	7	15	300
TM10100 (SC)	280	2.6t	TSM10100	750	2.5t	M10×1.5	100	122	50	7	15	300
TM1250 (SC)	290	2.6t	TSM1250	810	2.5t	M12×1.75	50	73	50	8	15	500
TM1275 (SC)	300	2.6t	TSM1275	820	2.5t	M12×1.75	75	98	50	8	15	500
TM12100 (SC)	300	2.6t	TSM12100	830	2.5t	M12×1.75	100	123	50	8	15	500
TM12125 (SC)	320	2.6t	TSM12125	920	2.5t	M12×1.75	125	148	50	8	15	500
TM12150 (SC)	350	2.6t	TSM12150	1,020	2.5t	M12×1.75	150	173	50	8	15	500
TM1650 (SC)	350	3.0t	TSM1650	1,360	3.0t	M16×2.0	50	77	76	10	17	800
TM1675 (SC)	380	3.0t	TSM1675	1,480	3.0t	M16×2.0	75	102	76	10	17	800
TM16100 (SC)	400	3.0t	TSM16100	1,520	3.0t	M16×2.0	100	127	76	10	17	800
TM16130 (SC)	430	3.0t	TSM16130	1,630	3.0t	M16×2.0	130	157	76	10	17	800
TM16150 (SC)	450	3.0t	TSM16150	1,780	3.0t	M16×2.0	150	177	76	10	17	800
TM16180 (SC)	550	3.0t	TSM16180	1,950	3.0t	M16×2.0	180	207	76	10	17	800
TM16200 (SC)	640	3.0t	TSM16200	2,350	3.0t	M16×2.0	200	227	76	10	17	800
TM20100 (SC)	610	3.0t	TSM20100	2,190	3.0t	M20×2.5	100	130	76	13	17	1,000
TM20130 (SC)	640	3.0t	TSM20130	2,380	3.0t	M20×2.5	130	160	76	13	17	1,000
TM20150 (SC)	670	3.0t	TSM20150	2,510	3.0t	M20×2.5	150	180	76	13	17	1,000
TM20180 (SC)	770	3.0t	TSM20180	2,950	3.0t	M20×2.5	180	210	76	13	17	1,000
TM20200 (SC)	870	3.0t	TSM20200	3,230	3.0t	M20×2.5	200	230	76	13	17	1,000
TM24100 (SC)	1,280	6.0t	—	—	—	M24×3.0	100	141	105	16	25	2,500
TM24150 (SC)	1,360	6.0t	—	—	—	M24×3.0	150	191	105	16	25	2,500
TM24200 (SC)	1,570	6.0t	—	—	—	M24×3.0	200	241	105	16	25	2,500

標準タイプ(ラバー付)

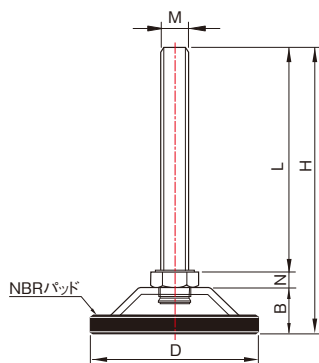

TMR

- 材 質：ボルト 機械構造用炭素鋼(S10C相当)
受 皿 熱間圧延鋼板(SPHC)
- 表面処理：ニッケルメッキ

TMR…SC

- 材 質：ボルト 機械構造用炭素鋼(S10C相当)
受 皿 熱間圧延鋼板(SPHC)
- 表面処理：三価クロメート


TSMR

- 材 質：ボルト ステンレス鋼棒(SUS304)
受 皿 ステンレス鋼板(SUS304)
- 表面処理：パシペート

● TMR/TMR…SC ● TSMR

標準品/三価クロメート品			ステンレス(SUS304)			主 要 寸 法						耐荷重 (4本/kg)
品 番	価 格	板厚	品 番	価 格	板厚	M	L	H	D	N	B	
TMR0640 (SC)	340	2.0t	TSMR0640	500	2.0t	M6×1.0	40	59	40	6	13	100
TMR0840 (SC)	360	2.0t	TSMR0840	540	2.0t	M8×1.25	40	59	40	6	13	200
TMR0880 (SC)	380	2.0t	TSMR0880	620	2.0t	M8×1.25	80	99	40	6	13	200
TMR1060 (SC)	440	2.6t	TSMR1060	840	2.5t	M10×1.5	60	87	55	7	20	300
TMR10100 (SC)	460	2.6t	TSMR10100	880	2.5t	M10×1.5	100	127	55	7	20	300
TMR1250 (SC)	450	2.6t	TSMR1250	890	2.5t	M12×1.75	50	78	55	8	20	500
TMR1275 (SC)	460	2.6t	TSMR1275	910	2.5t	M12×1.75	75	103	55	8	20	500
TMR12100 (SC)	470	2.6t	TSMR12100	920	2.5t	M12×1.75	100	128	55	8	20	500
TMR12125 (SC)	480	2.6t	TSMR12125	1,030	2.5t	M12×1.75	125	153	55	8	20	500
TMR12150 (SC)	500	2.6t	TSMR12150	1,100	2.5t	M12×1.75	150	178	55	8	20	500
TMR1675 (SC)	580	3.0t	TSMR1675	1,540	3.0t	M16×2.0	75	108	81	10	23	800
TMR16100 (SC)	590	3.0t	TSMR16100	1,580	3.0t	M16×2.0	100	133	81	10	23	800
TMR16130 (SC)	650	3.0t	TSMR16130	1,720	3.0t	M16×2.0	130	163	81	10	23	800
TMR16150 (SC)	700	3.0t	TSMR16150	1,850	3.0t	M16×2.0	150	183	81	10	23	800
TMR16180 (SC)	790	3.0t	TSMR16180	2,070	3.0t	M16×2.0	180	213	81	10	23	800
TMR16200 (SC)	870	3.0t	TSMR16200	2,540	3.0t	M16×2.0	200	233	81	10	23	800
TMR20100 (SC)	780	3.0t	TSMR20100	2,330	3.0t	M20×2.5	100	136	81	13	23	1,000
TMR20130 (SC)	840	3.0t	TSMR20130	2,570	3.0t	M20×2.5	130	166	81	13	23	1,000
TMR20150 (SC)	970	3.0t	TSMR20150	2,700	3.0t	M20×2.5	150	186	81	13	23	1,000
TMR20180 (SC)	1,070	3.0t	TSMR20180	3,100	3.0t	M20×2.5	180	216	81	13	23	1,000
TMR20200 (SC)	1,190	3.0t	TSMR20200	3,420	3.0t	M20×2.5	200	236	81	13	23	1,000

標準タイプ(重荷重用)




TH

- 材 質：ボルト 機械構造用炭素鋼(S10C相当)
受 皿 鍛造品
- 表面処理：三価クロメート

● TH

三価クロメート品		主 要 寸 法						耐荷重 (4本/kg)
品 番	価 格	M	L	H	D	N	B	
TH1250	550	M12×1.75	50	75	60	8	17	1,000
TH1275	560	M12×1.75	75	100	60	8	17	1,000
TH12100	560	M12×1.75	100	125	60	8	17	1,000
TH12125	560	M12×1.75	125	150	60	8	17	1,000
TH12150	650	M12×1.75	150	175	60	8	17	1,000
TH1675	740	M16×2.0	75	102	60	10	17	2,000
TH16100	740	M16×2.0	100	127	60	10	17	2,000
TH16130	770	M16×2.0	130	157	60	10	17	2,000
TH16150	830	M16×2.0	150	177	60	10	17	2,000
TH16180	860	M16×2.0	180	207	60	10	17	2,000
TH16200	930	M16×2.0	200	227	60	10	17	2,000
TH20100	870	M20×2.5	100	130	60	13	17	3,000
TH20130	920	M20×2.5	130	160	60	13	17	3,000
TH20150	1,000	M20×2.5	150	180	60	13	17	3,000
TH20180	1,040	M20×2.5	180	210	60	13	17	3,000
TH20200	1,180	M20×2.5	200	230	60	13	17	3,000

標準ステンレスタイプ(重荷重用)

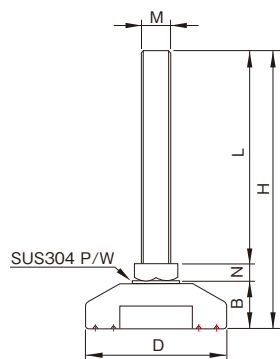


TSH

- 材 質：ボルト ステンレス鋼棒(SUS304)
受 皿 ステンレス鍛造(SUS304)
- 表面処理：パシペート

● TSH

ステンレス(SUS304)		主 要 寸 法						耐荷重 (4本/kg)
品 番	価 格	M	L	H	D	N	B	
TSH1250	2,270	M12×1.75	50	76	59	8	18	1,000
TSH1275	2,300	M12×1.75	75	101	59	8	18	1,000
TSH12100	2,330	M12×1.75	100	126	59	8	18	1,000
TSH12125	2,380	M12×1.75	125	151	59	8	18	1,000
TSH12150	2,440	M12×1.75	150	176	59	8	18	1,000
TSH12200	2,910	M12×1.75	200	226	59	8	18	1,000
TSH1675	2,640	M16×2.0	75	103	59	10	18	2,000
TSH16100	2,720	M16×2.0	100	128	59	10	18	2,000
TSH16130	2,840	M16×2.0	130	158	59	10	18	2,000
TSH16150	2,900	M16×2.0	150	178	59	10	18	2,000
TSH16180	3,170	M16×2.0	180	208	59	10	18	2,000
TSH16200	3,270	M16×2.0	200	228	59	10	18	2,000
TSH16250	3,940	M16×2.0	250	278	59	10	18	2,000
TSH2080	2,990	M20×2.5	80	111	59	13	18	3,000
TSH20100	3,150	M20×2.5	100	131	59	13	18	3,000
TSH20130	3,300	M20×2.5	130	161	59	13	18	3,000
TSH20150	3,440	M20×2.5	150	181	59	13	18	3,000
TSH20180	3,770	M20×2.5	180	211	59	13	18	3,000
TSH20200	3,940	M20×2.5	200	231	59	13	18	3,000
TSH20250	4,770	M20×2.5	250	281	59	13	18	3,000
TSH24150	7,610	M24×3.0	150	188	78	16	22	4,000
TSH24200	8,280	M24×3.0	200	238	78	16	22	4,000
TSH24250	8,600	M24×3.0	250	288	78	16	22	4,000

✦ アンカー固定タイプ

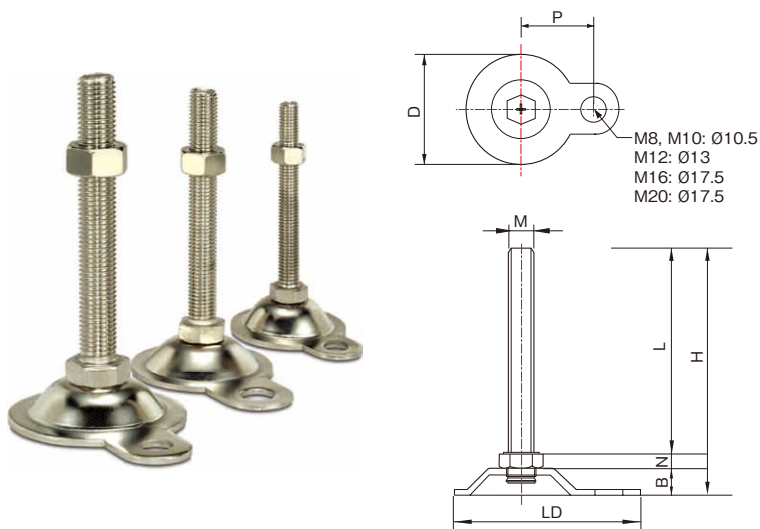

TK

- 材 質：ボルト 機械構造用炭素鋼(S10C相当)
受 皿 熱間圧延鋼板(SPHC)
- 表面処理：ニッケルメッキ

TSK


- 材 質：ボルト ステンレス鋼棒(SUS304)
受 皿 ステンレス鋼板(SUS304)
- 表面処理：パシペート

● TK

● TSK

標 準 品			ステンレス(SUS304)			主 要 寸 法								耐荷重 (4本/kg)
品 番	価 格	板厚	品 番	価 格	板厚	M	L	H	D	N	B	LD	P	
TK0840	350	2.6t	TSK0840	990	2.5t	M8×1.25	40	58	42	6	12	58.5	26.5	200
TK0880	420	2.6t	TSK0880	1,060	2.5t	M8×1.25	80	98	42	6	12	58.5	26.5	200
TK1060	460	2.6t	TSK1060	1,140	2.5t	M10×1.5	60	79	42	7	12	58.5	26.5	300
TK10100	510	2.6t	TSK10100	1,210	2.5t	M10×1.5	100	119	42	7	12	58.5	26.5	300
TK1250	520	3.0t	TSK1250	1,290	3.0t	M12×1.75	50	73	63	8	15	84	39	600
TK1275	530	3.0t	TSK1275	1,330	3.0t	M12×1.75	75	98	63	8	15	84	39	600
TK12100	550	3.0t	TSK12100	1,450	3.0t	M12×1.75	100	123	63	8	15	84	39	600
TK12125	570	3.0t	TSK12125	1,500	3.0t	M12×1.75	125	148	63	8	15	84	39	600
TK12150	620	3.0t	TSK12150	1,550	3.0t	M12×1.75	150	173	63	8	15	84	39	600
TK1675	630	3.0t	TSK1675	1,820	3.0t	M16×2.0	75	102	76	10	17	112	56	800
TK16100	670	3.0t	TSK16100	1,980	3.0t	M16×2.0	100	127	76	10	17	112	56	800
TK16130	710	3.0t	TSK16130	2,150	3.0t	M16×2.0	130	157	76	10	17	112	56	800
TK16150	740	3.0t	TSK16150	2,280	3.0t	M16×2.0	150	177	76	10	17	112	56	800
TK16180	850	3.0t	TSK16180	2,740	3.0t	M16×2.0	180	207	76	10	17	112	56	800
TK16200	910	3.0t	TSK16200	2,890	3.0t	M16×2.0	200	227	76	10	17	112	56	800
TK2080	800	3.0t	TSK2080	2,550	3.0t	M20×2.5	80	110	76	13	17	112	56	1,000
TK20100	850	3.0t	TSK20100	2,660	3.0t	M20×2.5	100	130	76	13	17	112	56	1,000
TK20130	940	3.0t	TSK20130	2,930	3.0t	M20×2.5	130	160	76	13	17	112	56	1,000
TK20150	990	3.0t	TSK20150	3,080	3.0t	M20×2.5	150	180	76	13	17	112	56	1,000
TK20180	1,040	3.0t	TSK20180	3,600	3.0t	M20×2.5	180	210	76	13	17	112	56	1,000
TK20200	1,200	3.0t	TSK20200	3,990	3.0t	M20×2.5	200	230	76	13	17	112	56	1,000

軽防振タイプ



TB

- 材 質：ボルト 機械構造用炭素鋼(S10C相当)
受 皿 熱間圧延鋼板 (SPHC)
- 表面処理：ニッケルメッキ

TSB

- 材 質：ボルト ステンレス鋼棒(SUS304)
受 皿 ステンレス鋼板(SUS304)
- 表面処理：パシペート

● TB

● TSB

標 準 品			ステンレス(SUS304)			主 要 寸 法						耐荷重 (4本/kg)
品 番	価 格	板厚	品 番	価 格	板厚	M	L	H	D	N	B	
TB0640	360	1.5t	TSB0640	600	1.5t	M6×1.0	40	63	40	6	17	100
TB0840	380	1.5t	TSB0840	630	1.5t	M8×1.25	40	63	40	6	17	200
TB0880	400	1.5t	TSB0880	690	1.5t	M8×1.25	80	103	40	6	17	200
TB1060	450	2.0t	TSB1060	780	2.0t	M10×1.5	60	84.5	48	7	17.5	300
TB10100	500	2.0t	TSB10100	870	2.0t	M10×1.5	100	124.5	48	7	17.5	300
TB1250	580	2.0t	TSB1250	1,300	2.0t	M12×1.75	50	75.5	48	8	17.5	500
TB1275	600	2.0t	TSB1275	1,350	2.0t	M12×1.75	75	100.5	48	8	17.5	500
TB12100	630	2.0t	TSB12100	1,430	2.0t	M12×1.75	100	125.5	48	8	17.5	500
TB12125	660	2.0t	TSB12125	1,500	2.0t	M12×1.75	125	150.5	48	8	17.5	500
TB12150	700	2.0t	TSB12150	1,580	2.0t	M12×1.75	150	175.5	48	8	17.5	500
TB1650	660	2.0t	TSB1650	1,650	2.0t	M16×2.0	50	78.5	61	10	18.5	800
TB1675	720	2.0t	TSB1675	1,870	2.0t	M16×2.0	75	103.5	61	10	18.5	800
TB16100	770	2.0t	TSB16100	2,000	2.0t	M16×2.0	100	128.5	61	10	18.5	800
TB16130	820	2.0t	TSB16130	2,170	2.0t	M16×2.0	130	158.5	61	10	18.5	800
TB16150	870	2.0t	TSB16150	2,300	2.0t	M16×2.0	150	178.5	61	10	18.5	800
TB16180	1,000	2.0t	TSB16180	2,830	2.0t	M16×2.0	180	208.5	61	10	18.5	800
TB16200	1,060	2.0t	TSB16200	3,000	2.0t	M16×2.0	200	228.5	61	10	18.5	800
TB2080	970	2.0t	TSB2080	2,650	2.0t	M20×2.5	80	111.5	61	13	18.5	1,000
TB20100	980	2.0t	TSB20100	2,740	2.0t	M20×2.5	100	131.5	61	13	18.5	1,000
TB20130	1,080	2.0t	TSB20130	3,040	2.0t	M20×2.5	130	161.5	61	13	18.5	1,000
TB20150	1,110	2.0t	TSB20150	3,220	2.0t	M20×2.5	150	181.5	61	13	18.5	1,000
TB20180	1,290	2.0t	TSB20180	3,780	2.0t	M20×2.5	180	211.5	61	13	18.5	1,000
TB20200	1,310	2.0t	TSB20200	4,200	2.0t	M20×2.5	200	231.5	61	13	18.5	1,000