




丸リンク

ROUND RINGS




品 番	価 格	D	L	参考使用荷重		weight (g)
				(kgf)	(kN)	
R-2	110	2.0	20	2	0.02	1.5
R-2.5	115	2.5	20	5	0.05	2.5
R-3	120	3.0	25	20	0.20	5.0
R-4	175	4.0	30	40	0.39	10.0
R-5	255	5.0	35	60	0.59	19.0
R-6	320	6.0	40	80	0.78	31.0
R-7	400	7.0	45	100	0.98	51.0
R-8	500	8.0	45	120	1.18	66.0
R-9	720	9.0	50	180	1.76	92.0
R-10	900	10.0	50	200	1.96	117.0
R-11	1,050	11.0	60	250	2.45	170.0
R-12	1,710	12.0	60	300	2.94	205.0
R-13	2,020	13.0	60	500	4.90	248.0



二重リンク

DOUBLE ROUND RINGS

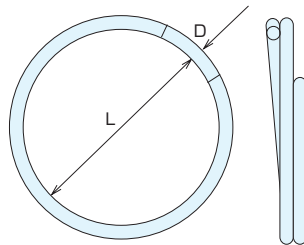


品 番	価 格	D	L	参考使用荷重		weight 10ヶあたり (g)
				(kgf)	(kN)	
WR-10-12	20	1.0	12	1	0.01	4
WR-12-14	25	1.2	14	1	0.01	8
WR-16-13	35	1.6	13	3	0.03	14
WR-16-18	45	1.6	18	2	0.02	19
WR-20-25	65	2.0	25	3	0.03	40



Sカン

"S" HOOKS

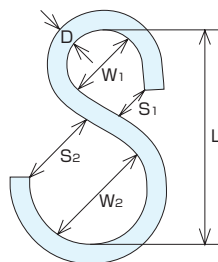


品 番	価 格	D	L	W ₁	W ₂	S ₁	S ₂	参考使用荷重		weight (g)
								(kgf)	(kN)	
S-2	50	2.0	19	7	7	2.5	2.5	3	0.03	1
S-2.5	65	2.5	23	8	12	3.0	6.0	5	0.05	3
S-3	85	3.0	30	9	16	4.0	11.0	7	0.07	4
S-4	135	4.0	36	12	19	5.0	11.0	15	0.15	10
S-5	215	5.0	43	14	21	6.0	11.0	20	0.20	18
S-6	315	6.0	50	15	25	7.0	16.0	30	0.29	30



パイプSカン

PIPE "S" HOOKS

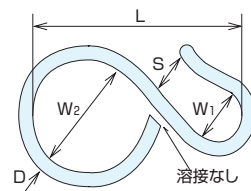


品 番	価 格	D	L	W ₁	W ₂	S	参考使用荷重		weight (g)
							(kgf)	(kN)	
SG-18	120	3.0	44	13.5	23.0	13	3	0.03	7
SG-25	170	3.4	55	14.0	29.5	13	3	0.03	12
SG-30	220	4.0	57	16.0	35.0	15	7	0.07	16
SG-38	300	4.0	78	30.0	40.0	28	7	0.07	21



丸カンスクルー

ROUND RINGS W/SCREW

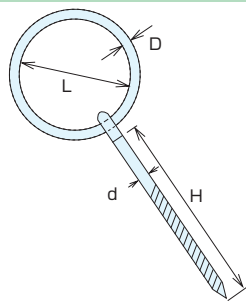


品 番	価 格	D	L	H	d	参考使用荷重		weight (g)
						(kgf)	(kN)	
SR-3	540	3	25	45	4	15	0.15	9
SR-5	800	5	30	55	6	30	0.29	28
SR-7	1,180	7	50	60	8	70	0.69	79



丸カンボルト

ROUND RINGS W/BOLT, NUT & WASHER

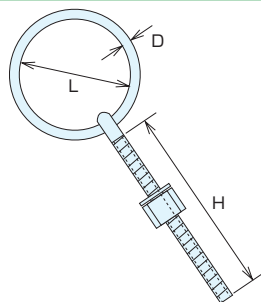


品 番	価 格	D	L	H	捻径	参考使用荷重		weight (g)
						(kgf)	(kN)	
BR-3M	540	3	25	35	M4	20	0.20	10
BR-5M	800	5	30	50	M6	50	0.49	30
BR-7M	1,180	7	50	70	M8	80	0.78	86



打ち込み丸カン

RING NAILS (COTTER PIN)

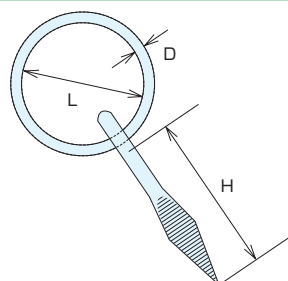


品 番	価 格	D	L	H	参考使用荷重		weight (g)
					(kgf)	(kN)	
CR-3	295	3	25	30	15	0.15	8
CR-4	355	4	30	35	20	0.20	15
CR-5	460	5	35	37	30	0.29	28
CR-6	670	6	40	45	50	0.49	50
CR-8	890	8	45	47	80	0.78	94



つば付リングボルト

RING BOLTS W/SHOULDER

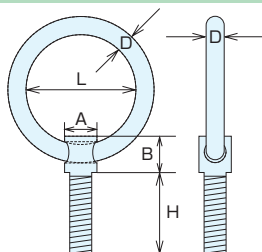


品 番	価 格	D	L	H	A	B	捻径	参考使用荷重		weight (g)
								(kgf)	(kN)	
LBT-6M30	1,110	6	40	30	12	12	M6	50	0.49	43
LBT-8M40	1,920	8	45	40	16	16	M8	80	0.78	94
LBT-10M45	2,860	10	50	45	19	19	M10	150	1.47	163



リングナット

RING NUTS

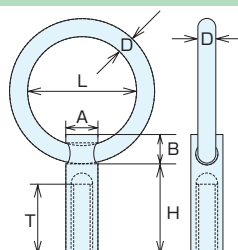


品 番	価 格	D	L	H	A	B	T	捻径	参考使用荷重		weight (g)
									(kgf)	(kN)	
LN-6M	1,070	5	35	26	10	10	20	M6	50	0.49	34
LN-8M	1,280	6	40	35	12	12	25	M8	80	0.78	59
LN-10M	1,570	8	45	35	14	13	27	M10	120	1.18	99




Uボルト (レギュラータイプ)

"U" BOLTS W/WASHER & NUT REGULAR TYPE




品 番	価 格	D	L ₁	L ₂	L ₃	W ₁	W ₂	捻径	参考使用荷重 (kgf)	(kN)	weight (g)
UB-4	660	4	58	21	30	26	30	M4	20	0.20	17
UB-5	730	5	73	25	40	30	35	M5	30	0.29	31
UB-6	880	6	84	29	45	29	35	M6	50	0.49	51
UB-8	1,320	8	92	32	50	27	35	M8	80	0.78	94
UB-10	2,370	10	120	45	55	40	50	M10	150	1.47	201

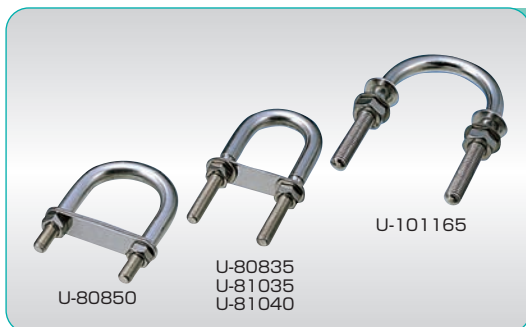


UボルトA型

"U" BOLTS W/WASHER & NUT A TYPE

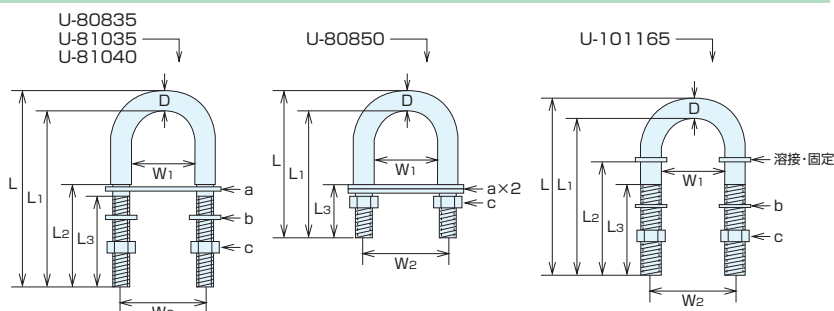

品 番	価 格	D	L	L ₁	L ₂	L ₃	W ₁	W ₂	捻径	参考使用荷重 (kgf)	(kN)	weight (g)
U-80835	1,140	10	80	70	—	30	25	35	M8	80	0.78	105
U-81035	1,260	10	100	90	—	45	25	35	M8	80	0.78	121
U-81040	1,480	10	100	90	50	40	30	40	M8	80	0.78	122
U-80850	1,830	10	80	70	—	25	40	50	M8	80	0.78	124
U-101165	2,170	10	110	100	65	45	55	65	M10	150	1.47	167



楕円プレート a


丸ワッシャー b

六角ナット c



アイプレート

EYE PLATES (SQUARE)




品 番	価 格	D	A ₁	A ₂	B ₁	B ₂	H	h	W	d	T	参考使用荷重 (kgf)	(kN)	weight (g)
IP-5	480	5	30	18	34	22	19.5	12	15	4.2	2.5	15	0.15	23
IP-6	620	6	34	20	40	25	25.5	17	19	5.2	2.5	20	0.20	35
IP-8	970	8	39	25	50	35	32.0	21	22	5.2	3.0	30	0.29	65
IP-9	1,490	9	42	27	58	43	37.0	24	28	5.2	4.0	60	0.59	105



丸カンプレート

EYE PLATES W/RING




品 番	価 格	D	L	A ₁	A ₂	B ₁	B ₂	H	d	T	参考使用荷重 (kgf)	(kN)	weight (g)
PR-5	750	5	30	30	18	34	22	19.5	4.2	2.5	15	0.15	39
PR-6	900	6	40	34	20	40	25	25.5	5.2	2.5	20	0.20	66
PR-8	1,470	8	50	39	25	50	35	32.0	5.2	3.0	30	0.29	135
PR-9	2,800	9	50	42	27	58	43	37.0	5.2	4.0	60	0.59	202



回転アイプレート

REVOLVING EYE PLATES (SQUARE)




品番	価格	D	W	A1	A2	B1	B2	H	d	T	参考使用荷重		weight (g)
											(kgf)	(kN)	
SI-5	1,890	5	15	35	23	35	23	33	4	2.5	15	0.15	38
SI-6	2,210	6	18	40	26	40	26	38	5	2.5	20	0.20	60
SI-8	2,630	8	19	50	34	50	34	44	5	3.0	30	0.29	109



ラウンドアイ

EYE PLATE (ROUND)




品番	価格	D	A1	A2	H	h	W	d	T	参考使用荷重		weight (g)
										(kgf)	(kN)	
RI-5	520	5	33	19	20.0	12.5	14	4.2	2.5	15	0.15	21
RI-6	640	6	40	23	25.5	17.0	19	5.2	2.5	20	0.20	34
RI-8	1,070	8	50	29	32.0	21.0	23	5.2	3.0	30	0.29	69



オープンラウンドアイ

OPEN ROUND EYES




品番	価格	D	A1	A2	H	h	S	d	T	参考使用荷重		weight (g)
										(kgf)	(kN)	
ORI-5	520	5	33	19	22.0	14.5	10	4.2	2.5	10	0.10	21
ORI-6	650	6	40	23	27.5	18.0	13	5.2	2.5	15	0.15	32
ORI-8	1,080	8	50	29	31.0	20.0	16	5.2	3.0	20	0.20	62



パッドアイ

PAD EYES




品番	価格	D	A	B1	B2	H	h	W	d	T	参考使用荷重		weight (g)
											(kgf)	(kN)	
PD-3	255	3	9	27	22.0	11.8	7.0	9.5	2.2	1.8	3	0.03	4
PD-4	320	4	12	36	28.5	15.8	10.0	12.5	3.2	1.8	7	0.07	8
PD-5	520	5	15	45	35.0	19.5	12.5	14.0	4.2	2.0	15	0.15	15
PD-6	640	6	20	60	46.0	26.0	18.0	18.0	5.2	2.0	20	0.20	27
PD-8	1,070	8	26	80	60.0	32.0	21.0	23.0	5.2	3.0	30	0.29	67
PD-9	1,430	9	32	100	73.0	38.0	26.0	25.0	6.2	3.0	60	0.59	104



オープンパッドアイ


OPEN END PAD EYES



品番	価格	D	A	B1	B2	H	h	d	S	T	参考使用荷重		weight (g)
											(kgf)	(kN)	
OPD-5	520	5	15	45	35	22	15.5	4.2	10	2	10	0.10	14
OPD-6	650	6	20	60	46	26	18.0	5.2	13	2	15	0.15	26
OPD-8	1,070	8	26	80	60	31	21.0	5.2	16	3	20	0.20	63
OPD-9	1,420	9	32	100	73	38	23.0	6.2	19	3	30	0.29	93




ダイヤモンドアイ EYE PLATES (DIAMOND)



品番	価格	D	A ₁	A ₂	B ₁	B ₂	H	h	W	d	T	参考使用荷重		weight (g)
												(kgf)	(kN)	
DI-5	730	5	37	24	59	46	22	12	14	4.2	3	15	0.15	38
DI-6	920	6	40	27	64	51	25	14	18	4.2	3	20	0.20	43
DI-8	1,260	8	50	34	80	65	33	20	21	5.2	3	30	0.29	76




ロングアイ LONG EYES



品番	価格	D	A	B ₁	B ₂	H	h	W	d	T	参考使用荷重		weight (g)
											(kgf)	(kN)	
PDL-5	510	5	15	45	35.0	20	13	14	3.6	2	15	0.15	16
PDL-6	630	6	18	60	48.0	22	14	24	4.2	2	20	0.20	28
PDL-7	860	7	21	70	56.5	23	14	28	4.2	2	25	0.25	40
PDL-8	1,050	8	24	80	65.0	25	14	34	5.2	3	30	0.29	68
PDL-9	1,400	9	27	100	83.0	27	15	48	6.0	3	60	0.59	101



ハンガーユニットD型 PULL WITH DEE RINGS




品番	価格	D ₁	L	L ₁	W	W ₁	H	d	D ₂	A	B	参考使用荷重		weight (g)
												(kgf)	(kN)	
HD-3	580	1.5	36	21.0	23	—	7.5	4.2	5	30	27	10	0.10	26
HD-4	610	1.5	28	17.0	28	14.0	7.5	3.2	5	35	32	10	0.10	29
HD-5	650	1.5	33	19.5	33	16.5	7.5	3.5	5	40	37	10	0.10	37
HD-6	700	1.5	38	22.5	38	19.0	8.5	3.5	5	45	42	10	0.10	43
HD-8	1,130	2.0	48	28.5	48	24.0	11.0	4.2	6	50	47	15	0.15	82

●ステンレス皿木捻子付



ハンガーユニットSQ型 PULL WITH OBLONG RINGS




品番	価格	D ₁	L	L ₁	W	W ₁	H	d	D ₂	A	B	参考使用荷重		weight (g)
												(kgf)	(kN)	
HQ-2	520	1.5	36	21.0	18	—	7.5	3.2	5	20	12	10	0.10	19
HQ-3	580	1.5	36	21.0	23	—	7.5	4.2	5	26	15	10	0.10	24
HQ-4	610	1.5	28	17.0	28	14	7.5	3.2	5	32	18	10	0.10	27
HQ-5	680	1.5	38	22.5	38	19	8.5	3.5	5	39	21	10	0.10	39

●ステンレス皿木捻子付




プレートフック PLATE HOOKS



品番	価格	D	L	W ₁	W ₂	H	S ₁	S ₂	d	T	参考使用荷重		weight (g)
											(kgf)	(kN)	
PH-4	910	4	10	34	24.0	26	8.5	11.5	4	2.5	10	0.10	10
PH-5	1,020	5	12	40	28.5	32	10.0	15.0	5	3.0	15	0.15	18
PH-6	1,210	6	14	44	32.0	37	12.0	17.0	5	3.0	20	0.20	28
PH-8	1,400	8	16	50	36.0	49	16.0	23.5	6	4.0	30	0.29	54
PH-10	1,690	10	18	58	40.0	58	19.0	29.0	8	4.0	50	0.49	91




ウォールフック WALL HOOKS



品番	価格	L	H	W1	W2	S	d	T	t	参考使用荷重		weight (g)
										(kgf)	(kN)	
WH-1	1,480	38	25	34	22	5	4.2	3.2	5.0	15	0.15	40
WH-2	1,820	41	34	34	22	10	4.2	4.5	7.5	15	0.15	55




ウォールフックIP型 WALL HOOKS "EYE PLATE TYPE"



品番	価格	L1	L2	H	W1	W2	S	R	d	T	t	参考使用荷重		weight (g)
												(kgf)	(kN)	
IPH-1	1,020	44	29	29	32	19	14	3.5	5	4.5	6	15	0.15	63




ウォールフックPD型 WALL HOOKS "PAD EYE TYPE"



品番	価格	L1	L2	W	H	S	d	T	t	参考使用荷重		weight (g)
										(kgf)	(kN)	
PDH-1	1,580	70	54	17.5	34	9	4.2	4.5	7	15	0.15	71




アイストラップ EYE STRAPS



品番	価格	D	L1	L2	L3	H	h	d	参考使用荷重		weight (g)
									(kgf)	(kN)	
IS-4	175	4	40	31	10	15	11	3.2	7	0.07	4
IS-5	195	5	50	40	12	18	13	4.2	15	0.15	8
IS-6	250	6	57	46	15	21	15	5.2	20	0.20	14
IS-8	325	8	63	48	11	25	17	5.2	30	0.29	26
IS-10	450	10	74	56	15	30	20	8.2	90	0.88	47



ローアイストラップ LOW EYE STRAPS




品番	価格	D	L1	L2	L3	H	h	T	d	参考使用荷重		weight (g)
										(kgf)	(kN)	
ISL-5	470	5	62	50.0	25	9.0	4.0	3.0	5.2	15	0.15	9
ISL-6	540	6	80	67.5	41	15.0	9.0	3.0	6.4	20	0.20	19
ISL-8	640	8	73	56.0	37	15.5	9.5	3.5	5.2	30	0.29	27

●ISL-8は「座ぐりなしタイプ」です。



スナップフックA型 (リング付)

SPRING HOOKS W/GROMMET




品 番	価 格	D	L	W	S	d	参考使用荷重		weight (g)
							(kgf)	(kN)	
A-4	575	4	45	22	7	5.5	30	0.29	9
A-5	680	5	54	25	7	6.0	60	0.59	18
A-6	820	6	61	30	8	7.5	80	0.78	29
A-8	1,200	8	81	40	11	11.0	120	1.18	68
A-10	1,900	10	102	50	13	14.0	150	1.47	132
A-12	3,570	12	142	65	21	17.0	250	2.45	265



スナップフックB型

SPRING HOOKS




品 番	価 格	D	L	W	S	d	d2	参考使用荷重		weight (g)
								(kgf)	(kN)	
B-4	455	4	45	22	7	4.5	6.5	30	0.29	9
B-5	545	5	54	25	7	5.0	8.0	60	0.59	17
B-6	680	6	61	30	8	6.5	9.0	80	0.78	28
B-8	990	8	81	40	11	9.0	12.0	120	1.18	66
B-10	1,610	10	102	50	14	11.0	16.0	150	1.47	131
B-12	3,150	12	142	65	21	13.0	19.0	250	2.45	261



スナップフックC型

2-LATCH CHAIN CATCHES




品 番	価 格	D	L	W	S1	S2	d	t	参考使用荷重		weight (g)
									(kgf)	(kN)	
C-5	790	6	70	25	9	8	13	4.3	20	0.20	36
C-6	930	7	81	30	11	9	15	5.0	30	0.29	43
C-8	1,260	8	98	35	14	13	19	6.5	60	0.59	78



スナップフックD型 (オープンタイプ)

OPEN END CHAIN HOOKS




品 番	価 格	D	L	W	S	d	t	参考使用荷重		weight (g)
								(kgf)	(kN)	
D-5	700	5.5	65	21	7	9	4.5	20	0.20	29
D-6	900	7.0	76	25	9	10	5.0	30	0.29	41
D-8	1,130	8.0	88	28	10	12	6.5	60	0.59	64



L型フック

SPRING SNAPS "L", TYPE

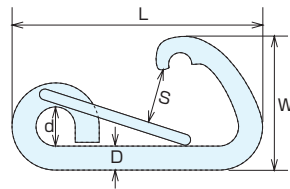


品 番	価 格	D	L	W	S	d	参考使用荷重		weight (g)
							(kgf)	(kN)	
L-6	940	6	61	35	11	9	70	0.69	30
L-8	1,330	8	81	46	18	11	100	0.98	70
L-10	1,880	10	102	58	22	15	150	1.47	136



R型フック

SPRING SNAPS "R", TYPE


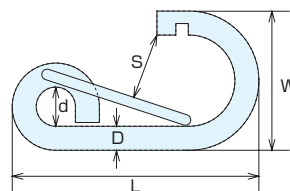


品 番	価 格	D	L	W	S	d	参考使用荷重		weight (g)
							(kgf)	(kN)	
LR-6	930	6	62	34	13	10	70	0.69	31
LR-8	1,320	8	82	45	18	12	100	0.98	71
LR-10	1,880	10	101	55	22	15	150	1.47	136



オープンフックB型

OPEN HOOKS

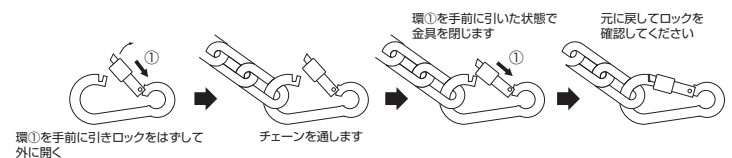
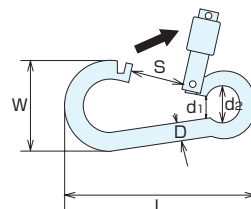


品 番	価 格	D	L	W	d ₁	d ₂	S	参考使用荷重		weight (g)
								(kgf)	(kN)	
BN-5	780	5	55	26	6.0	8.0	15	70	0.69	21
BN-6	970	6	60	30	7.0	9.5	16	100	0.98	32
BN-8	1,390	8	80	41	9.5	12.5	23	150	1.47	72
BN-10	2,020	10	100	51	10.5	16.0	27	200	1.96	138



オープンフックP型

"PUCHI-KARABINA" OPEN HOOKS


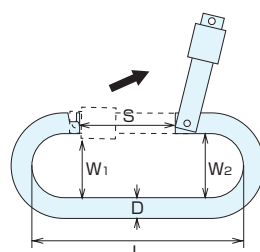


品 番	価 格	D	L	W ₁	W ₂	S	参考使用荷重		weight (g)
							(kgf)	(kN)	
PN-5	970	5	58	14.5	16	15	70	0.69	26
PN-6	1,160	6	66	15.5	18	15	100	0.98	41
PN-8	1,700	8	75	19.0	20	24	150	1.47	80
PN-10	2,310	10	90	25.5	26	27	200	1.96	152



カラビナジュニア

"KARABINA" SPRING HOOKS JR.

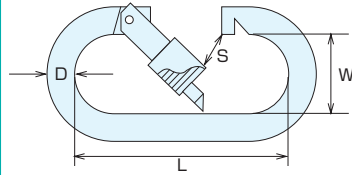


品 番	価 格	TYPE	D	L	W	S	参考使用荷重		weight (g)
							(kgf)	(kN)	
KJR-1	2,460	環なし	10	80	30	16	135	1.32	133
KJR-2	2,980	環付き	10	80	30	15	215	2.11	140



プチカラビナ (ハズレ止め付)

"PUCHI-KARABINA" SNAP HOOKS W/SPRING




品 番	価 格	D	L	W	S	参考使用荷重		weight (g)
						(kgf)	(kN)	
PK-5	780	5	58	16	10	60	0.59	23
PK-6	980	6	67	18	10	80	0.78	38
PK-8	1,430	8	74	20	10	120	1.18	76
PK-10	2,330	10	90	26	13	150	1.47	145



スィベルスナップ

SWIVEL EYE SNAPS




品 番	価 格	D	L	W	S	H	d	t	参考使用荷重		weight (g)
									(kgf)	(kN)	
A-0	1,110	4.0	66	22	5	12	13.0	7.0	20	0.20	34
A-1	1,280	4.5	85	30	10	19	21.0	6.5	30	0.29	58
A-2	1,760	5.0	98	38	12	20	21.5	7.5	40	0.39	91
A-3	2,240	7.0	118	46	14	23	23.0	10.0	50	0.49	151



スィベルベルトフック

SWIVEL BELT HOOKS




品 番	価 格	D	L	W1	W2	S	H	t	参考使用荷重		weight (g)
									(kgf)	(kN)	
V-1	1,160	4	63	25	21.5	9	5	7	20	0.20	29



ナスカン

SWIVEL EYE BOLT SNAPS




品 番	価 格	D	L	W	S	H	d	t	参考使用荷重		weight (g)
									(kgf)	(kN)	
N-1	1,410	4.0	77	20	7	12	13	5.0	30	0.29	33
N-2	1,470	4.4	88	24	8	15	16	7.0	40	0.39	51
N-3	1,910	7.0	123	32	16	28	35	7.5	50	0.49	123

リングキャッチ

QUICK LINKS



●両ネジタイプ



品 番	価 格	D	S	L	B1	B2	E	参考使用荷重		weight (g)
								(kgf)	(kN)	
SH-3	610	3	5.5	29	10	8.5	3.3	30	0.29	6
SH-4	670	4	6.5	34	11	9.5	4.4	50	0.49	11
SH-5	760	5	8.5	42	13	11.5	5.4	80	0.78	20
SH-6	850	6	9.5	49	15	13.5	6.5	150	1.47	32
SH-8	1,380	8	10.5	61	17	15.0	8.5	350	3.43	72
SH-9	1,850	9	11.5	67	20	18.0	9.5	500	4.90	101
SH-10	2,560	10	13.0	76	22	20.0	10.5	700	6.86	139

ピン止めリングキャッチ

QUICK LINKS W/PINLOCK

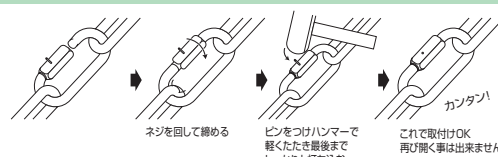


●両ネジタイプ

品 番	価 格	D	S	L	B1	B2	E	参考使用荷重		weight (g)
								(kgf)	(kN)	
SHT-3	780	3	5.5	29	10	8.5	3.3	30	0.29	6
SHT-4	850	4	6.5	34	11	9.5	4.4	50	0.49	11
SHT-5	980	5	8.5	42	13	11.5	5.4	80	0.78	20
SHT-6	1,060	6	9.5	49	15	13.5	6.5	150	1.47	32
SHT-8	1,650	8	10.5	61	17	15.0	8.5	350	3.43	72

口広リングキャッチ

QUICK LINKS, WIDE OPENING




●両ネジタイプ

品 番	価 格	D	S	L	B1	B2	E	参考使用荷重		weight (g)
								(kgf)	(kN)	
SHL-5	940	5	10	47	13	11.5	5.5	80	0.78	22
SHL-6	1,040	6	13	56	15	13.5	6.5	150	1.47	35
SHL-8	1,690	8	16	73	19	17.0	8.5	350	3.43	83

スピードキャッチ

QUICK LINKS, LONG




●片ネジタイプ

品 番	価 格	D	S	L	B1	B2	E	参考使用荷重		weight (g)
								(kgf)	(kN)	
SCH-3	690	3	6	36	10.5	9.0	4.4	30	0.29	7
SCH-4	740	4	8	42	13.5	11.5	5.3	50	0.49	15
SCH-5	840	5	10	52	15.0	13.0	6.3	80	0.78	26
SCH-6	940	6	12	60	15.0	13.0	7.5	150	1.47	41
SCH-8	1,550	8	16	80	20.5	18.0	9.0	350	3.43	95

オーバルキャッチ

SCREW CATCHES





●六角レンチ使用

品 番	価 格	D	S	L	B	リチサイズ	参考使用荷重		weight (g)
							(kgf)	(kN)	
OC-6	1,170	6	15	40	15.5	1.5	100	0.98	26
OC-8	1,600	8	20	54	20.0	2.0	150	1.47	58
OC-10	2,460	10	26	70	26.0	2.5	200	1.96	123



チェーンキャッチ CHAIN CATCHS

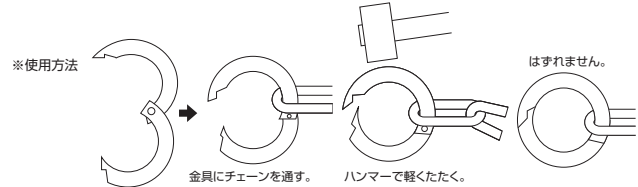



※上図のように閉じた時の寸法です。
※スリング等、物を吊る場合において使用しないでください。
注意事項：横にヒネルとハズれる場合があります。

品 番	価 格	D	L	参考使用荷重		weight (g)
				(kgf)	(kN)	
CC-4	380	4	20	10	0.10	8
CC-5	430	5	25	20	0.20	15
CC-6	540	6	30	30	0.29	26
CC-8	700	8	35	50	0.49	55
CC-9	1,040	9	40	80	0.78	76



ピン止めチェーンキャッチ CHAIN CATCHS W/PINLOCK





※上図のように閉じた時の寸法です。
※スリング等、物を吊る場合において使用しないでください。
※ピンを貫通させないで使用されると大変危険です。
注意事項：横にヒネルとハズれる場合があります。


品 番	価 格	D	L	参考使用荷重		weight (g)
				(kgf)	(kN)	
CCT-4	660	4	20	20	0.20	7
CCT-5	710	5	25	30	0.29	15
CCT-6	890	6	30	50	0.49	26
CCT-8	1,060	8	35	80	0.78	55
CCT-9	1,530	9	40	100	0.98	76



ワイヤーキャッチ WIRE BUNDLE

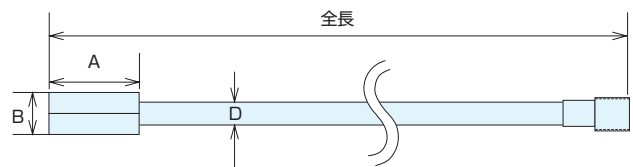


※上図のように閉じた時の寸法です。
※スリング等、物を吊る場合において使用しないで下さい。
※ワイヤーは7×19を使用
※ナットの中ですき間ができないように最後までしっかり締めて下さい。

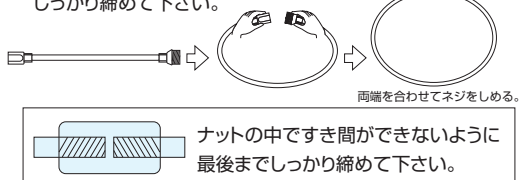

品 番	価 格	D	L	A	B	全長	参考使用荷重		weight (g)
							(kgf)	(kN)	
CW-2050	910	2	50	13	7	165	70	0.69	8
CW-2100	1,080	2	100	13	7	320	70	0.69	12
CW-3060	1,290	3	60	15	8	195	160	1.57	13
CW-3120	1,500	3	120	15	8	380	160	1.57	20
CW-3300	2,220	3	300	15	8	1000	160	1.57	43
CW-3500	2,550	3	500	15	8	1680	160	1.57	69
CW-4080	1,710	4	80	18	9	270	270	2.65	25
CW-4140	2,030	4	140	18	9	450	270	2.65	39
CW-4300	2,900	4	300	18	9	1000	270	2.65	71
CW-4500	3,190	4	500	18	9	1660	270	2.65	113



ワリカン SPLIT LINKS





●使用方法



品 番	価 格	D	L	W	参考使用荷重		weight (g)
					(kgf)	(kN)	
G-2	60	2.0	12	3.0	3	0.03	1
G-2.5	80	2.5	14	4.0	5	0.05	3
G-3	100	3.0	24	5.0	7	0.07	4
G-4	120	4.0	26	6.5	15	0.15	7
G-5	145	5.0	28	8.0	20	0.20	12
G-6	175	6.0	33	9.0	30	0.29	20
G-7	195	7.0	37	10.0	40	0.39	31
G-8	210	8.0	37	12.0	50	0.49	46
G-9	300	9.0	40	14.0	100	0.98	60
G-10	370	10.0	41	15.0	130	1.27	79
G-11	470	11.0	43	17.0	150	1.47	105
G-13	580	13.0	52	20.0	200	1.96	172



Jジョイント J-JOINTS

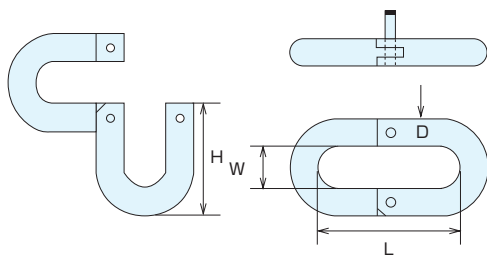
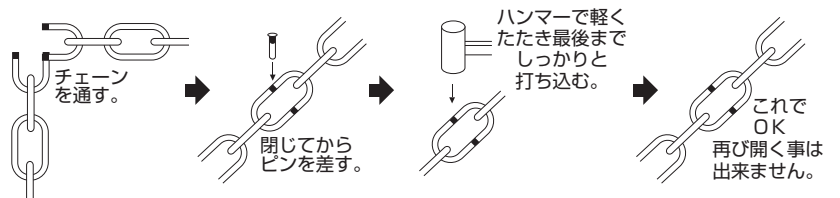


品 番	価 格	D	L	W	H	参考使用荷重		weight (g)
						(kgf)	(kN)	
JJ-4	690	4	26	6	19.0	30	0.29	7
JJ-5	810	5	27	7	21.0	50	0.49	11
JJ-6	930	6	31	9	24.5	70	0.69	19
JJ-8	1,050	8	38	12	31.0	100	0.98	44
JJ-10	1,530	10	40	15	35.0	200	1.96	78

●テーパーパービン使用



チェーンジョイント CJ CHAIN JOINTS

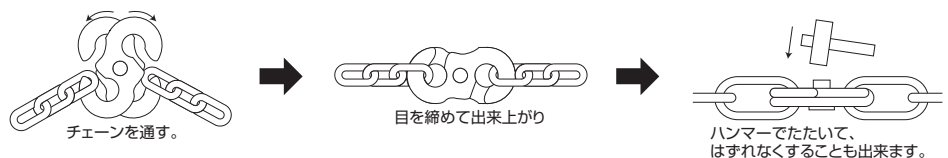


品 番	価 格	D	L	W	使用 チェーン径	参考使用荷重		weight (g)
						(kgf)	(kN)	
CJ-1	190	6.2	26	13	2φ-2.5φ	25	0.25	4
CJ-2	210	6.5	29	15	3φ	40	0.39	6
CJ-3	220	7.5	33	17	4φ	60	0.59	8
CJ-4	280	9.0	39	19	5φ-6φ	80	0.78	12



半丸シャックル

HALF-ROUND SCREW PIN D-SHACKLES




品 番	価 格	D	L	B	d	t	F	捻径	参考使用荷重		weight
									(kgf)	(kN)	(g)
RS-5	360	5	21	12	12	2.5	5.0	M5	90	0.88	13
RS-6	430	6	25	14	14	3.0	6.5	M6	120	1.18	21
RS-8	580	8	33	17	17	4.0	7.5	M8	200	1.96	39



ネジシャックル

SCREW PIN D-SHACKLES




品 番	価 格	D	L	B	d	捻径	参考使用荷重		weight
							(kgf)	(kN)	(g)
SP-4	360	4	16	8	8	M4	50	0.49	7
SP-5	420	5	20	10	10	M5	90	0.88	15
SP-6	450	6	24	12	12	M6	170	1.67	23
SP-7	560	7	28	14	14	W5/16	200	1.96	40
SP-8	620	8	32	16	16	W5/16	250	2.45	60
SP-9	680	9	36	18	18	W3/8	300	2.94	83
SP-10	920	10	40	20	20	W3/8	350	3.43	113
SP-12	1,130	12	48	24	24	W1/2	420	4.12	200
SP-13	1,340	13	52	26	26	W1/2	500	4.90	290



ワイドネジシャックル

WIDE SCREW PIN D-SHACKLES




品 番	価 格	D	L	B	d	捻径	参考使用荷重		weight
							(kgf)	(kN)	(g)
SPW-5	670	5	22.5	25	10	M5	90	0.88	18
SPW-6	740	6	36.0	24	12	M6	170	1.67	33
SPW-8	940	8	35.0	28	16	M8	250	2.45	65
SPW-10	1,670	10	60.0	40	20	M10	350	3.43	156



ロングネジシャックル

LING SCREW PIN D-SHACKLES




品 番	価 格	D	L	B	d	捻径	参考使用荷重		weight
							(kgf)	(kN)	(g)
SPL-4	570	4	32	8	8	M4	50	0.49	14
SPL-5	620	5	40	10	10	M5	90	0.88	20
SPL-6	670	6	48	12	12	M6	170	1.67	34
SPL-8	890	8	62	16	16	W5/16	250	2.45	82
SPL-10	1,370	10	78	20	20	W3/8	350	3.43	160



SBMシャックル


SAFETY D-SHACKLES, BOLT TYPE



品 番	価 格	D	L	B	d	t	捻径	参考使用荷重		weight
								(kgf)	(kN)	(g)
SBM-6	1,810	6	24	12	12	6	M6	180	1.76	29
SBM-7	2,000	8	28	14	14	7	M8	250	2.45	51
SBM-8	2,270	8	32	16	16	8	M8	300	2.94	72
SBM-9	2,630	10	36	18	18	9	M10	400	3.92	110
SBM-10	3,180	10	40	20	20	10	M10	600	5.88	139
SBM-12	3,720	12	48	24	24	12	M12	750	7.35	230
SBM-13	4,090	14	52	25	26	13	M14	900	8.82	310

アイナット


EYE NUTS



品 番	価 格	D	L	H	B	捻径	参考使用荷重		weight (g)
							(kgf)	(kN)	
IN-2M	530	2	8	10	5	M2	10	0.10	2
IN-3M	550	3	9	12	6	M3	15	0.15	4
IN-4M	600	4	10	14	7	M4	20	0.20	6
IN-5M	660	5	13	18	8	M5	30	0.29	11
IN-6M	740	5	16	20	11	M6	50	0.49	17
IN-8M	840	7	19	26	14	M8	80	0.78	34
IN-10M	970	8	25	32	17	M10	150	1.47	60
IN-12M	1,400	10	30	39	22	M12	220	2.16	116

アイボルト


EYE BOLTS



品 番	価 格	D	L	H	B	捻径	参考使用荷重		weight (g)
							(kgf)	(kN)	
IB-2M	450	2.0	8	15	11.0	M2	10	0.10	2
IB-3M	470	3.0	9	18	11.5	M3	15	0.15	4
IB-4M	480	4.0	10	20	12.0	M4	20	0.20	7
IB-5M	580	5.0	13	25	13.0	M5	30	0.29	15
IB-6M	670	5.5	16	27	14.0	M6	50	0.49	16
IB-8M	750	7.0	19	34	15.0	M8	80	0.78	29
IB-10M	870	8.0	25	42	18.0	M10	150	1.47	59
IB-12M	1,230	10.0	29	52	22.0	M12	220	2.16	115

ロングアイボルト


LONG EYE BOLTS (WELDED)

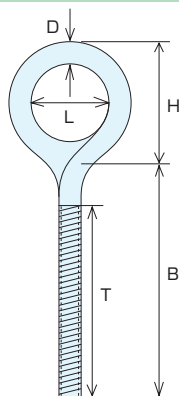

品 番	価 格	D	L	H	B	T	捻径	参考使用荷重		weight (g)
								(kgf)	(kN)	
LE-2M	235	1.6	8.5	13	27	23	M2	10	0.10	1
LE-3M	300	2.5	9.0	17	31	30	M3	15	0.15	4
LE-4M	360	3.5	10.0	20	40	38	M4	20	0.20	8
LE-5M	440	4.5	13.0	26	52	47	M5	30	0.29	15
LE-6M	490	5.0	16.0	30	60	58	M6	50	0.49	25
LE-8M	750	7.0	18.0	36	60	55	M8	80	0.78	50
LE-10M	980	8.0	24.0	44	80	75	M10	150	1.47	103
LE-12M	1,870	10.5	29.0	55	100	97	M12	220	2.16	184

つば付ロングアイボルト


LONG EYE BOLTS (L.W) W/SHOULDER

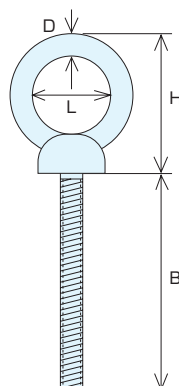

品 番	価 格	D	L	H	B	捻径	参考使用荷重		weight (g)
							(kgf)	(kN)	
LT-4M	540	4	10	20	40	M4	20	0.20	9
LT-5M	650	5	13	26	50	M5	30	0.29	18
LT-6M	780	5	16	27	60	M6	50	0.49	26
LT-8M	1,080	6	19	34	60	M8	80	0.78	46
LT-10M	1,470	8	24	41	81	M10	150	1.47	86
LT-12M	2,550	10	29	50	100	M12	220	2.16	165




枠式ターンバックル (フック&フック) TURNBUCKLES, FRAME TYPE HOOK/HOOK



品 番	価 格	L	W	A	B	S	L ₁	L ₂	捻径	参考使用荷重 (kgf)	(kN)	weight (g)
TB-4H	740	57	13	28	50	6	101	140	W3/16	40	0.39	27
TB-5H	830	70	14	35	60	7	120	165	W3/16	50	0.49	41
TB-6H	930	90	19	45	75	9	155	210	W1/4	80	0.78	89
TB-8H	1,930	120	21	60	102	11	210	290	W5/16	120	1.18	152
TB-9H	2,450	150	23	75	120	13	240	350	W3/8	160	1.57	256
TB-12H	3,420	200	30	100	160	14	320	470	W1/2	400	3.92	524




豆ブロック "MAME" BLOCKS



品 番	価 格	車径 mm	軸径 mm	A	B	C	D	L	使 用 ロープ径	参考使用荷重 (kgf)	(kN)	weight (g)
MB-20	1,960	20	7	23	16	10.0	4	57.0	~φ6	40	0.39	52
MB-25	2,400	25	10	30	23	15.0	6	82.5	~φ9	70	0.69	130
MB-32	2,930	32	11	36	26	14.5	6	93.0	~φ10	120	1.18	200
MB-38	3,730	38	12	42	27	14.5	7	102.0	~φ11	160	1.57	275
MB-50	4,900	50	16	54	30	21.0	8	127.0	~φ15	240	2.35	340




スーパーデフキー SUPER DEF-LOCKS, STAINLESS PAD LOCK



品 番	価 格	A	B	C	E	F	G	weight (g)
SDK-30	3,770	52.5	28.5	32.0	5.5	16	12.5	89
SDK-40	7,280	67.5	38.5	40.0	7.0	19	16.0	198
SDK-50	10,680	85.5	47.0	50.5	9.3	20	19.0	378
SDK-65	17,600	103.5	58.0	64.5	11.8	31	25.0	756



スーパーデフブロック SUPER DEF-LOCKS, W/CHAIN

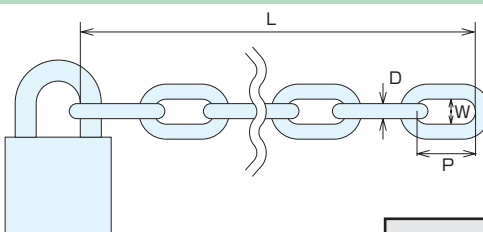

**チェーン硬度3倍以上
UP!**

ステンレスSUS304チェーン同様径に比べ
抜群の硬度を発揮しました。

品 番	価 格	チェーン長 L	D	P	W	鍵	weight (g)
SDL-30-10	9,220	1000	5.5	30	8	SDK-30	664
SDL-40-10	13,500	1000	6.0	31	10	SDK-40	925
SDL-50-10	21,100	1000	8.0	38	12	SDK-50	1,625
SDL-65-10	32,200	1000	9.0	39	13	SDK-65	2,383

＜チェーン＞

ステンレス特殊銅チェーン
焼入れ処理
熱処理をすることで一層硬度を強くしました。
クロームメッキ仕上げ
表面硬度を強くし耐蝕性、耐摩耗性に優れ光沢のある仕上げ
になりました。