


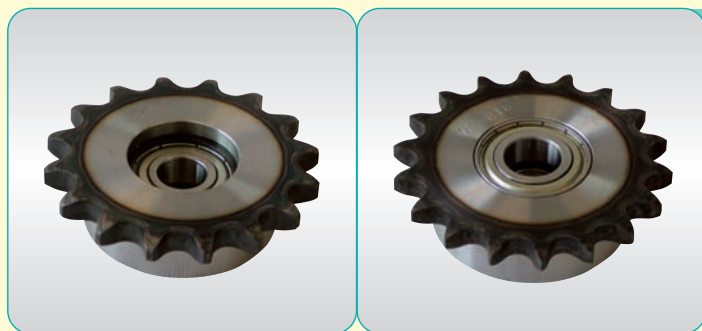

スプロケットアイドラー T

●スプロケット内径表

スプロケット 品 番	ベアリング内径				
	12	15	20	25	30
35B17	○				
35B18	○	◎			
40B15	○				
40B16	○	○			
40B17	○	○			
40B18		◎			
40B20			◎		
40B21				◎	
50B13	○	○			
50B14		○			
50B15		○			
50B16		○			
50B18			◎		
50B20				◎	
60B13		○	○		
60B14			○		
60B15		○			
60B16			◎		
60B18				◎	
80B13			○		
80B15					◎

○シングルベアリング ◎ダブルベアリング

●材 質：S35C（歯先高周波焼入）

品 番	価 格	チェーン No	歯数	P	O	A	B	C	D	E	F	G	H	使用 ベアリング	質量 (g)
T35B17-12S	2,500	35	17	51.84	57	41	12	27	32	4.3	20	5.0	10	6201ZZ×1	150
T35B18-12S	2,500		18	54.85	60	44	12	27	32						180
T40B15-12S	2,480	40	15	61.08	67	46	12	27	32			6.0	10	6201ZZ×1	250
T40B16-12S	2,550		16	65.10	71	50	12	27	32			6.0	10	6201ZZ×1	300
T40B16-15S	2,620		16	65.10	71	50	15	30	35	7.2	22	5.5	11	6202ZZ×1	290
T40B17-12S	2,620		17	69.12	75	54	12	27	32			6.0	10	6201ZZ×1	370
T40B17-15S	2,670		17	69.12	75	54	15	30	35			5.5	11	6202ZZ×1	350
T50B13-12S	2,800	50	13	66.34	73	51	12	27	32			7.5	10	6201ZZ×1	350
T50B13-15S	2,840		13	66.34	73	51	15	30	35			7.0	11	6202ZZ×1	330
T50B14-15S	2,900		14	71.34	78	52	15	30	35	8.7	25	7.0	11	6202ZZ×1	380
T50B15-15S	2,990		15	76.35	83	57	15	30	35			7.0	11	6202ZZ×1	470
T50B16-15S	3,050		16	81.37	88	62	15	30	35			7.0	11	6202ZZ×1	570
T60B13-15S	3,340	60	13	79.60	88	57	15	30	35			10.5	11	6202ZZ×1	630
T60B14-20S	3,660		14	85.61	93	62	20	40	47	11.7	32	9.0	14	6204ZZ×1	650
T60B15-15S	3,660		15	91.62	99	68	15	30	35			10.5	11	6202ZZ×1	950
T80B13-20S	4,980	80	13	106.14	118	77	20	40	47	14.6	40	13.0	14	6204ZZ×1	1420
T35B18-15W	3,070	35	18	54.85	60	44	15	—	32	4.3	20	2.0	9	6202ZZ×2	200
T40B18-15W	3,230	40	18	73.14	78	57	15	—	32		22	4.0	9	6202ZZ×2	440
T40B20-20W	3,610		20	81.18	88	67	20	—	42	7.2	25	1.0	12	6204ZZ×2	610
T40B21-25W	3,800		21	85.21	92	71	25	—	47		25	1.0	12	6205ZZ×2	670
T50B18-20W	3,990	50	18	91.42	98	72	20	—	42	8.7	28	4.0	12	6204ZZ×2	850
T50B20-25W	4,270		20	101.48	110	73	25	—	47					6205ZZ×2	920
T60B16-20W	4,410	60	16	97.65	107	73	20	—	47	11.7	32	4.0	14	6204ZZ×2	1080
T60B18-25W	5,480		18	109.71	119	83	25	—	52		40	10.0	15	6205ZZ×2	1620
T80B15-30W	7,430	80	15	122.17	135	93	30	—	62	14.6	40	8.0	16	6206ZZ×2	2050

●品番表示


T 40B15-12 S

スプロケット
品番

ベアリング
内径

ベアリング

S：シングルベアリング
W：ダブルベアリング



※ご注意
ダブルベアリングタイプの
ナット締め取付使用はしな
いで下さい。（左図参照）