

● サイレンサ


- 特徴
- ✓ G1/8" ~ G1"の6サイズ
- ✓ 貫通型構造で異物による排気抵抗なし
- ✓ 軽量



品番表示

品番	接続口径	L1	L2	L3	L4	G	重量(g)
VTS18	G1/8"	48	5.7	42.3	16	G1/8"	4
VTS14	G1/4"	71.5	7.5	64	24	G1/4"	12
VTS38	G3/8"	71.5	7.5	64	24	G3/8"	13
VTS12	G1/2"	129.5	11	118.5	40	G1/2"	52
VTS34	G3/4"	129.5	11	118.5	40	G3/4"	54
VTS10	G1"	129.5	11	118.5	40	G1"	40

寸法

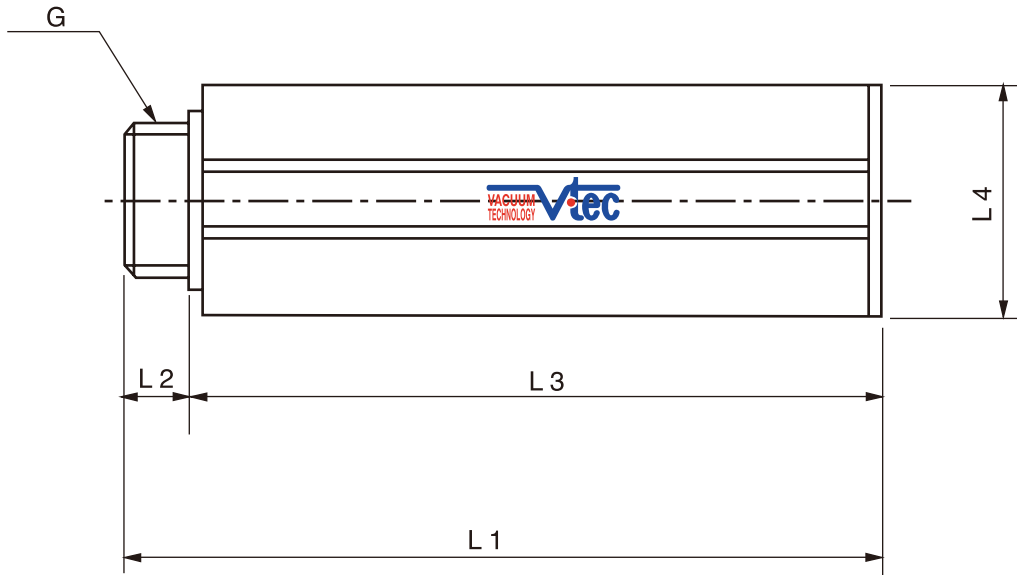

● エア／真空用マニホールド

- 特徴
- ✓ 様々なポートサイズ及び配列
- ✓ 軽量アルマイト製



品番表示

※ n : ポート数			
品番	供給ポート径	マニホールドポート径	マニホールド最大ポート数
VTDF38-18Xn	G3/8"	G1/8"	60
VTDF12-18Xn	G1/2"	G1/8"	60
VTDF12-14Xn	G1/2"	G1/4"	50
VTDF34-18Xn	G3/4"	G1/8"	60
VTDF34-14Xn	G3/4"	G1/4"	50
VTDF34-38Xn	G3/4"	G3/8"	45
VTDL38-18Xn	G3/8"	G1/8"	120
VTDL12-18Xn	G1/2"	G1/8"	120
VTDL12-14Xn	G1/2"	G1/4"	100
VTDL34-18Xn	G3/4"	G1/8"	120
VTDL34-14Xn	G3/4"	G1/4"	100
VTDL34-38Xn	G3/4"	G3/8"	90
VTDC38-18Xn	G3/8"	G1/8"	120
VTDC12-18Xn	G1/2"	G1/8"	120
VTDC12-14Xn	G1/2"	G1/4"	100
VTDC34-18Xn	G3/4"	G1/8"	120
VTDC34-14Xn	G3/4"	G1/4"	100
VTDC34-38Xn	G3/4"	G3/8"	90
VTDE38-18Xn	G3/8"	G1/8"	180
VTDE12-18Xn	G1/2"	G1/8"	180
VTDE12-14Xn	G1/2"	G1/4"	150
VTDE34-18Xn	G3/4"	G1/8"	180
VTDE34-14Xn	G3/4"	G1/4"	150
VTDE34-38Xn	G3/4"	G3/8"	130

※ 特殊仕様はお問い合わせ下さい。