



水・空気・蒸気用二方弁


■ SB・SBR



SB3-03GW



SBR50-BW



■ 仕様


品番	配管継手	口 径	流量係数	作動圧力差	皮相電力	重 量	寸 法		
		mm	Cv	MPa	VA	kg	A	B	C
SB3 -03GW -03GS	10A (Rc 3/8)	8	1	0.015~1	20	0.7	56	83.5	13.5
SB7 -03GW -03GS -03GW -03GS	10A (Rc 3/8)	4	0.47	0~1.2 0~1.0	24	0.55	56	79	13.5
		★6	1	0~0.4					
SBR15 -GW -GS	15A (Rc 1/2)	15	3.8	0.015~1	15	0.85	70	120	22
SBR20 -GW -GS	20A (Rc 3/4)	15	4.5	0.015~1	15	0.95	80	123	25
SBR25 -GW -GS	25A (Rc 1)	20	7.6	0.015~1	15	1.4	90	128	30
SBR32 -GW -GS	32A (Rc 1 1/4)	25	12	0.015~1	15	1.9	105	140	35
SBR40 -GW -GS	40A (Rc 1 1/2)	30	17.5	0.015~1	15	2.5	120	156	42
SBR50 -GW -GS	50A (Rc 2)	40	29	0.015~1	15	4.8	140	188	50
SBR50 -BW -BS	50A (Rc 2)	40	29	0.015~1	15	9.1	180	216	78

○取付方向…自由 ○気密試験圧力…2.0MPa ○耐圧試験圧力…2.0MPa ○流体温度…水・空気 -30~100℃、蒸気 5~184℃


●流体種別:A—空気・W—水、ブライン・S—蒸気 ○材質…SB3—黄銅鍛造・他・青銅鋳物

★受注生産品


■ SC・SD・SX



SC40-04G



SD40-20B

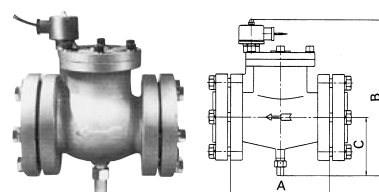

SX30-30B

■ 仕様


品 番	接 続	流 体	配管継手	口 径	流量係数	作動圧力差	最高使用圧力	重 量	外形寸法				
				mm	Cv	MPa	MPa	kg	A	B	C		
SC40-04	G	A	15A (Rc 1/2)	10	2.4	0.015~0.9	0.9	1.0	70	157	59		
		W				0.015~1.5	1.5						
		S				0.015~0.7	0.7						
SC60-06	G	A	20A (Rc 3/4)	15	4.7	0.015~0.9	0.9	1.3	80	170	63		
		W				0.015~1.5	1.5						
		S				0.015~0.7	0.7						
SC70-10	G	S	25A (Rc 1)	20	8.0	0.015~0.7	0.7	1.6	90	178	69		
	B							3.2	70				
SD10-10	G	A	25A (Rc 1)	20	8.0	0.015~0.9	0.9	2.2	90	210	69		
		W				0.015~1.5	1.5						
	B	A				0.015~0.9	0.9	3.8	70				
		W				0.015~1.5	1.5						
SD20-12	G	A	32A (Rc 1 1/4)	25	12.6	0.015~0.9	0.9	2.6	100	223	76		
		W				0.015~1.5	1.5						
		S				0.015~0.7	0.7						
		A				0.015~0.9	0.9						
	B	W				0.015~1.5	1.5	4.6	92				
		S				0.015~0.7	0.7						
		A				0.015~0.9	0.9						
		W				0.015~1.5	1.5						
SD30-14	G	A	40A (Rc 1 1/2)	30	18.1	0.015~0.9	0.9	3.2	110	235	82		
		W				0.015~1.5	1.5						
		S				0.015~0.7	0.7						
		A				0.015~0.9	0.9						
	B	W				0.015~1.5	1.5	7.9	134				
		S				0.015~0.7	0.7						
		A				0.03~0.9	0.9						
		W				0.03~1.0	1.0						
SD40-20	B	S	50A (Rc 2)	40	30.0	0.03~0.7	0.7	13.8	150	293	97		
		A				0.03~0.9	0.9						
		W				0.03~1.0	1.0						
SX25-24	B	A	65A (Rc 2 1/2)	50	43.0	0.03~0.9	0.9	19.0	180	284	102		
		W				0.03~1.0	1.0						
		S				0.03~0.7	0.7						
SX30-30	B	A	80A (Rc 3)	60	77.0	0.03~0.7	0.7	27.8	196	315	120		
		W											
		S											

○取付方向…垂直 ○気密試験圧力…2.0MPa ○耐圧試験圧力…2.0MPa ○流体温度…A—5~50℃、W—30~100℃、S—5~170℃

○材質…(ボディ) 青銅鋳物製

電動ボールバルブ 二方弁・三方弁

■ VMB (二方弁)

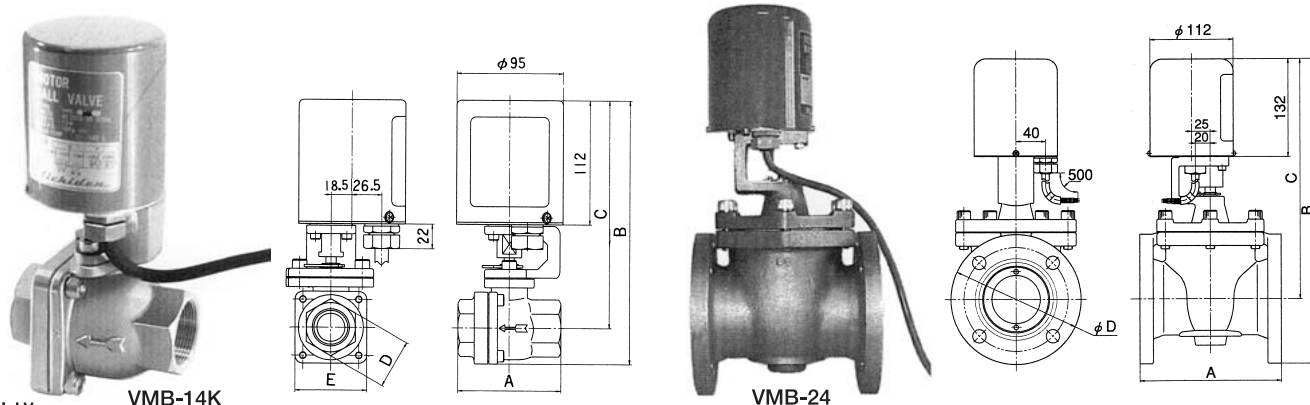


■ 仕様


品番	配管継手	弁口径	流量係数	消費電力	開閉時間	作動圧力差	重量	寸法 (mm)				
		mm	Cv	W	sec./秒	MPa	kg	A	B	C	D	E
VMB-4K	15A (Rc 1/2)	15	22	13	10	0~1	3.3	82	227	199	35	56
VMB-6K	20A (Rc 3/4)	20	45				3.2	82	227	199	35	56
VMB-10K	25A (Rc 1)	25	80				3.7	92	235	203	44	64
VMB-12K	32A (Rc 1 1/4)	32	135				4.5	106	248	208	54	80
VMB-14K	40A (Rc 1 1/2)	38	200				5.5	122	261	214	58	94
VMB-20K	50A (Rc 2)	50	400	19	12	0~0.7	7.5	142	277	222	74	110
VMB-24	65A (Rc 2 1/2)	65	670				18.5	190	412	324.5	175	—
VMB-30	80A (Rc 3)	76	920				22.3	200	365	293	185	—

- 流体…水、温水、ブライン、蒸気、空気、油、燃料ガス
- 流体温度…-30~180℃
- 許容範囲温度…-10~50℃
- 気密、耐圧試験圧力…2.0MPa
- 電源…AC100VまたはAC200V (50~60Hz)
- 取付方向…自由
- 継手はJIS B 2212規定の1.0MPa用丸フランジ
- 材質…(ボディ) 青銅鋳物・ステンレス鋳物製

■ VMB (三方弁)

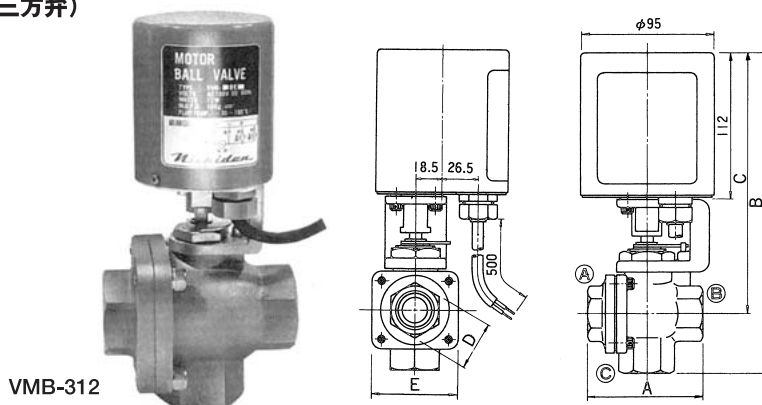

■ 配線方法

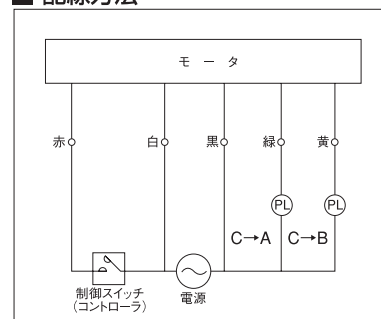

■ 仕様

品番	配管継手	弁口径	流量係数	消費電力	開閉時間	作動圧力差	重量	寸法 (mm)				
		mm	Cv	W	sec./秒	MPa	kg	A	B	C	D	E
VMB-304	15A (Rc 1/2)	15	6.7	13	10	0~1	3.5	83	239	196	35	62
VMB-306	20A (Rc 3/4)	19	8.2				3.5	83	239	196	35	62
VMB-310	25A (Rc 1)	25	15.5				4.1	96	251	201	44	74
VMB-312	32A (Rc 1 1/4)	28	22.7				5.1	122	267	208	54	90
VMB-314	40A (Rc 1 1/2)	35	30.0				6.1	136	280	214	58	100
VMB-320	50A (Rc 2)	46	56.0	13	10	0~1	8.8	162	301	223	74	120

- 流体…水、温水、ブライン、蒸気、空気、油、燃料ガス
- 流体温度…-30~180℃
- 許容範囲温度…-10~50℃
- 気密、耐圧試験圧力…2.0MPa
- 電源…AC100VまたはAC200V (50~60Hz)
- 取付方向…自由
- 材質…(ボディ) 青銅鋳物・ステンレス鋳物製