


SBI - FL / FLL

寸法表

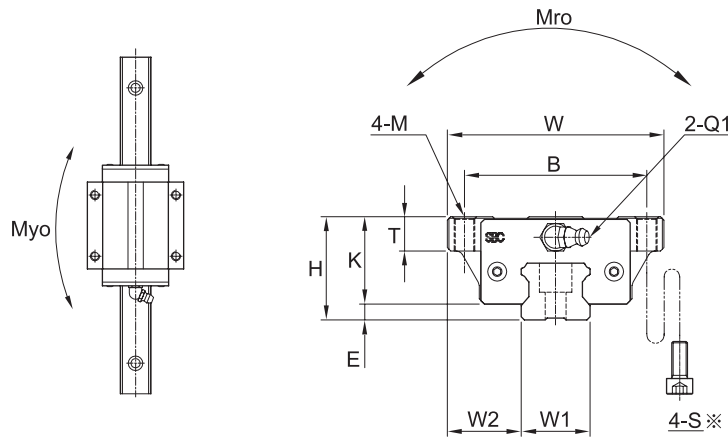


呼び型番	組立寸法				ブロック寸法												
	H	W	L	E	取付穴				L1	T±1	K	T1	N1	T2	N2	Q1	※Q2
					B	J	M	S									
SBI15FL	24	47	63.8	3	38	30	M5	M4	45.2	9	21	4.5	5.5	3.8	3.8	M4×0.7	Φ3.5
SBI15FLL	24	47	79.4	3	38	30	M5	M4	60.8	9	21	4.5	5.5	3.8	3.8	M4×0.7	Φ3.5
SBI20FL	30	63	78.8	4.6	53	40	M6	M5	56.8	12	25.4	6	12	5.8	5	M6×0.75	Φ3.5
SBI20FLL	30	63	96.4	4.6	53	40	M6	M5	74.4	12	25.4	6	12	5.8	5	M6×0.75	Φ3.5
SBI25FL	36	70	92	5.5	57	45	M8	M6	70	14	30.5	6	12	5	5	M6×0.75	Φ3.5
SBI25FLL	36	70	108	5.5	57	45	M8	M6	86	14	30.5	6	12	5	5	M6×0.75	Φ3.5
SBI30FL	42	90	107.6	7	72	52	M10	M8	79.6	15.5	35	8.5	12	7.8	5	M6×0.75	Φ5.7
SBI30FLL	42	90	131.6	7	72	52	M10	M8	103.6	15.5	35	8.5	12	7.8	5	M6×0.75	Φ5.7
SBI35FL	48	100	124.6	7.5	82	62	M10	M8	94.6	15	40.5	8	12	8	6	M6×0.75	Φ5.7
SBI35FLL	48	100	152.6	7.5	82	62	M10	M8	122.6	15	40.5	8	12	8	6	M6×0.75	Φ5.7
SBI45FL	60	120	142	9	100	80	M12	M10	108	18	51	10.5	13.5	9.3	6.5	PT1/8	Φ5.7
SBI45FLL	60	120	174	9	100	80	M12	M10	140	18	51	10.5	13.5	9.3	6.5	PT1/8	Φ5.7
SBI55FL	70	140	172.4	12	116	95	M14	M12	131	22	58	12	13	12	8	PT1/8	Φ8.7
SBI55FLL	70	140	211.8	12	116	95	M14	M12	170.4	22	58	12	13	12	8	PT1/8	Φ8.7
SBI65FL	90	170	219.8	19	142	110	M16	M14	170.4	26	71	14	13	14	10	PT1/8	Φ8.7
SBI65FLL	90	170	272.2	19	142	110	M16	M14	222.8	26	71	14	13	14	10	PT1/8	Φ8.7

※ S : 下から取付する場合の規格です。

※ Q2 : 側面ニップル取付用穴です。

※サイズ 45 まで標準仕様品 (P.591) の納期は受注後一週間です。

45 サイズ以上の納期はお問い合わせください。

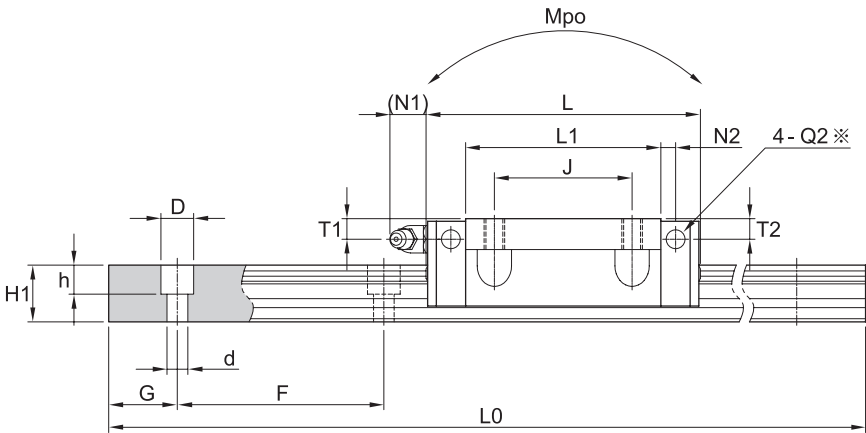

単位：mm

レール寸法									基本定格荷重		静的許容モーメント			質量	
W1	W2	H1	F	ボルト取付穴			G	最大長さ L0	動定格	静定格	[KN・m]			ブロック [kg]	レール [Kg/m]
				d	D	h			C (KN)	Co (KN)	Mro	Mpo	Myo		
15	16	13	60	4.5	7.5	5.5	20	3,000	14.1	24.1	0.16	0.17	0.17	0.19	1.3
15	16	13	60	4.5	7.5	5.5	20	4,000	17.1	31.7	0.21	0.29	0.29	0.26	1.3
20	21.5	16.5	60	6	9.5	8.5	20	4,000	22.2	38.2	0.36	0.33	0.33	0.41	2.2
20	21.5	16.5	60	6	9.5	8.5	20	4,000	27.9	50	0.47	0.56	0.56	0.54	2.2
23	23.5	20	60	7	11	9	20	4,000	31.5	52.1	0.56	0.56	0.56	0.69	3
23	23.5	20	60	7	11	9	20	4,000	36.7	64.4	0.69	0.84	0.84	0.85	3
28	31	23	80	9	14	12	20	4,000	42.8	65.4	0.85	0.77	0.77	1.04	4.25
28	31	23	80	9	14	12	20	4,000	51.3	84.7	1.10	1.3	1.3	1.37	4.25
34	33	26	80	9	14	12	20	4,000	59.5	89.1	1.42	1.28	1.28	1.56	6.02
34	33	26	80	9	14	12	20	4,000	71.3	115.3	1.83	2.12	2.12	2.04	6.02
45	37.5	32	105	14	20	17	22.5	4,000	79.2	116.3	2.48	1.9	1.9	2.8	9.77
45	37.5	32	105	14	20	17	22.5	4,000	94.8	150.5	3.21	3.14	3.14	3.69	9.77
53	43.5	38	120	16	23	20	30	4,000	127.3	181.8	4.81	2.97	2.97	4.42	13.72
53	43.5	38	120	16	23	20	30	4,000	147.9	224.5	5.95	4.78	4.78	5.82	13.72
63	53.5	53	150	18	26	22	35	4,000	188.3	261.7	8.24	5.57	5.57	9.1	23.17
63	53.5	53	150	18	26	22	35	4,000	232.5	354.1	11.15	9.86	9.86	11.98	23.17

SBC

リニアレール

ミニチュアリニアレール

ロータリニアレール

リニアブッシュ

転造ボールねじ

サポートユニット

クロスローラ