


SBI - SL / SLL

寸法表

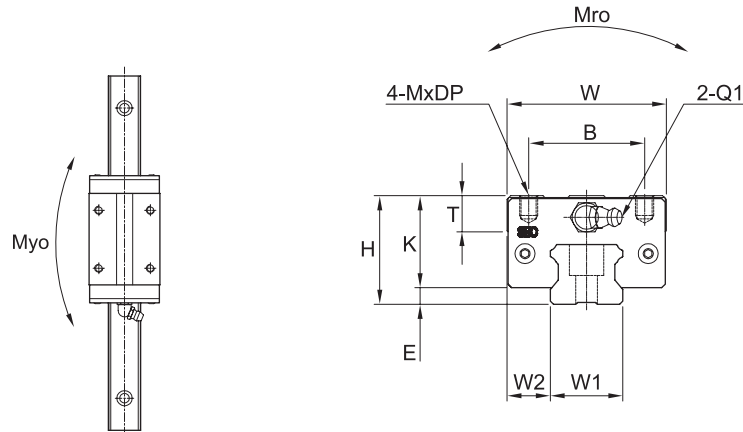


呼び型番	組立寸法				ブロック寸法												
	H	W	L	E	取付穴				L1	T±1	K	T1	N1	T2	N2	Q1	※Q2
					B	J	M	DP									
SBI15SL	28	34	63.8	3	26	26	M4	5	45.2	10	25	8.5	5.5	7.8	3.8	M4×0.7	Φ3.5
SBI15SLL	28	34	79.4	3	26	34	M4	5	60.8	10	25	8.5	5.5	7.8	3.8	M4×0.7	Φ3.5
SBI20SL	30	44	78.8	4.6	32	36	M5	5	56.8	10	25.4	6	12	5.8	5	M6×0.75	Φ3.5
SBI20SLL	30	44	96.4	4.6	32	50	M5	5	74.4	10	25.4	6	12	5.8	5	M6×0.75	Φ3.5
SBI25SL	40	48	92	5.5	35	35	M6	8	70	16	34.5	10	12	9	5	M6×0.75	Φ3.5
SBI25SLL	40	48	108	5.5	35	50	M6	8	86	16	34.5	10	12	9	5	M6×0.75	Φ3.5
SBI30SL	45	60	107.6	7	40	40	M8	10	79.6	12	38	11.5	12	10.8	5	M6×0.75	Φ5.7
SBI30SLL	45	60	131.6	7	40	60	M8	10	103.6	12	38	11.5	12	10.8	5	M6×0.75	Φ5.7
SBI35SL	55	70	124.6	7.5	50	50	M8	10	94.6	15	47.5	15	12	15	6	M6×0.75	Φ5.7
SBI35SLL	55	70	152.6	7.5	50	72	M8	10	122.6	15	47.5	15	12	15	6	M6×0.75	Φ5.7
SBI45SL	70	86	142	9	60	60	M10	13	108	17	61	20.5	13.5	19.3	6.5	PT1/8	Φ5.7
SBI45SLL	70	86	174	9	60	80	M10	13	140	17	61	20.5	13.5	19.3	6.5	PT1/8	Φ5.7
SBI55SL	80	100	172.4	12	75	75	M12	18	131	21	68	22	13	22	8	PT1/8	Φ8.7
SBI55SLL	80	100	211.8	12	75	95	M12	18	170.4	21	68	22	13	22	8	PT1/8	Φ8.7
SBI65SL	90	126	219.8	19	76	70	M16	16	170.4	26	71	14	13	14	10	PT1/8	Φ8.7
SBI65SLL	90	126	272.2	19	76	120	M16	16	222.8	26	71	14	13	14	10	PT1/8	Φ8.7

※ Q2: 側面ニップル取付用穴です。

※サイズ 45 まで標準仕様品 (P.591) の納期は受注後一週間です。

45 サイズ以上の納期はお問い合わせください。

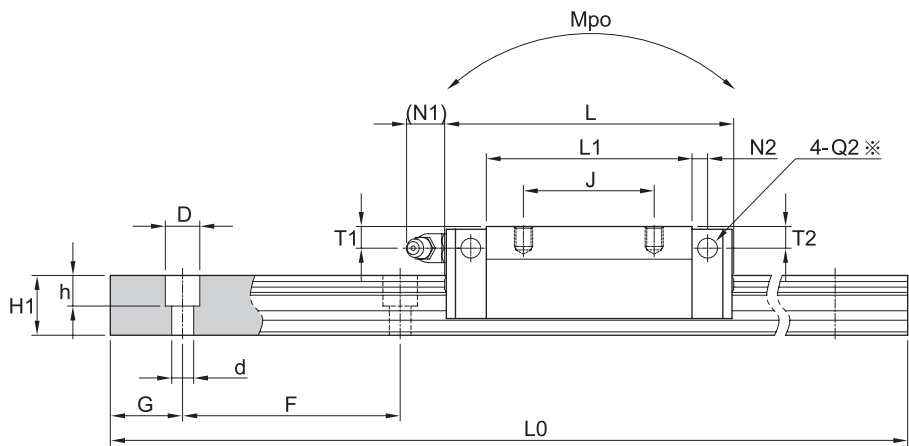

単位：mm

レール寸法									基本定格荷重		静的許容モーメント			質量	
W1	W2	H1	F	ボルト取付穴			G	最大長さ L0	動定格 C (KN)	静定格 Co (KN)	[KN・m]			ブロック [kg]	レール [Kg/m]
				d	D	h					Mro	Mpo	Myo		
15	9.5	13	60	4.5	7.5	5.5	20	3,000	14.1	24.1	0.16	0.17	0.17	0.19	1.3
15	9.5	13	60	4.5	7.5	5.5	20	4,000	17.1	31.7	0.21	0.29	0.29	0.26	1.3
20	12	16.5	60	6	9.5	8.5	20	4,000	22.2	38.2	0.36	0.33	0.33	0.41	2.2
20	12	16.5	60	6	9.5	8.5	20	4,000	27.9	50	0.47	0.56	0.56	0.54	2.2
23	12.5	20	60	7	11	9	20	4,000	31.5	52.1	0.56	0.56	0.56	0.69	3
23	12.5	20	60	7	11	9	20	4,000	36.7	64.4	0.69	0.84	0.84	0.85	3
28	16	23	80	9	14	12	20	4,000	42.8	65.4	0.85	0.77	0.77	1.04	4.25
28	16	23	80	9	14	12	20	4,000	51.3	84.7	1.10	1.3	1.3	1.37	4.25
34	18	26	80	9	14	12	20	4,000	59.5	89.1	1.42	1.28	1.28	1.56	6.02
34	18	26	80	9	14	12	20	4,000	71.3	115.3	1.83	2.12	2.12	2.04	6.02
45	20.5	32	105	14	20	17	22.5	4,000	79.2	116.3	2.48	1.9	1.9	2.8	9.77
45	20.5	32	105	14	20	17	22.5	4,000	94.8	150.5	3.21	3.14	3.14	3.69	9.77
53	22.5	38	120	16	23	20	30	4,000	127.3	181.8	4.81	2.97	2.97	4.42	13.72
53	22.5	38	120	16	23	20	30	4,000	147.9	224.5	5.95	4.78	4.78	5.82	13.72
63	31.5	53	150	18	26	22	35	4,000	188.3	261.7	8.24	5.57	5.57	9.1	23.17
63	31.5	53	150	18	26	22	35	4,000	232.5	354.1	11.15	9.86	9.86	11.98	23.17

SBC

リニアレール

ミニチュアリニアレール

ロータリニアレール

リニアブッシュ

転造ボールねじ

サポートユニット

クロスローラ