




STK 標準リード STK シリーズ寸法表

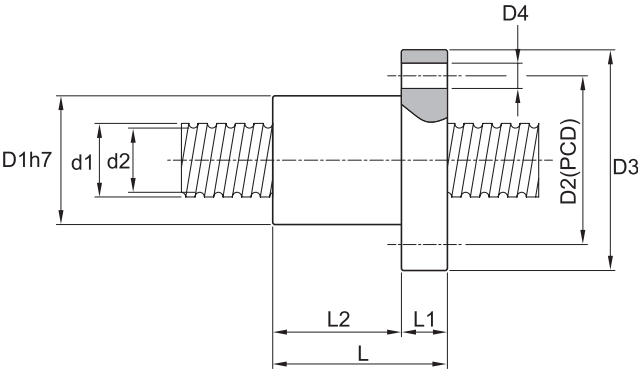


呼び型番	d ₁ ねじ軸外径	P _h リード	d ₀ ボール中心径	D _a ボール径	d ₂ 谷径	回路数	D _{1 h7}	D ₂ (PCD)	D ₃
STK1605	15.6	5	16	3.5	12.7	3x1	34	44	54
STK2005	19.6	5	20	3.5	16.7	4x1	40	50	60
STK2505	24.6	5	25	3.5	21.7	4x1	43	55	67
STK2510	24.6	10	25	3.5	21.7	4x1	60	78	96
STC2510	24.6	10	25	3.5	21.7	4x1	40	51	62
STK3205	31.6	5	32	3.5	28.7	4x1	56	71	86
STK3210	31.6	10	32	5.556	27.1	4x1	67	85	103
STK4005	39.6	5	40	3.5	36.7	4x1	64	82	100
STK4010	39.6	10	40	7.144	36.7	4x1	76	96	116
STK5010	49.5	10	50	7.144	43	4x1	75	93	110
STK6310	62.5	10	63	7.144	56.9	6x1	90	108	125
STK8010	79.5	10	80	7.144	73.9	6x1	105	125	145

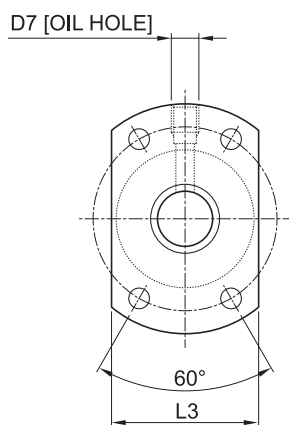

[STK1605~4010]

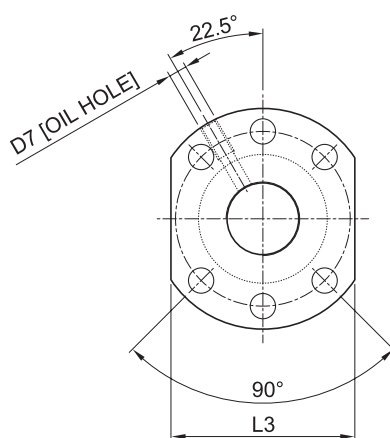

[STC2510]

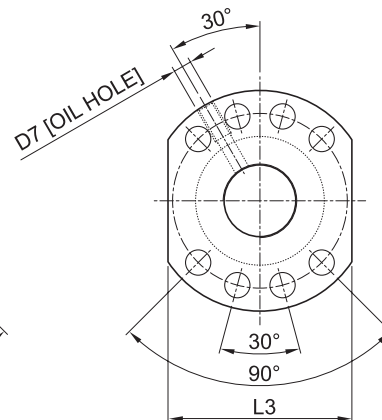

[STK5010~8010]

単位 : mm

D ₄	D ₇	L	L ₁	L ₂	L ₃	基本動定格荷重		標準軸長さ
						動定格	静定格	
						C(KN)	Co(KN)	
4.5	M6x1	45	10	35	40	7.5	12.1	3000
4.5	M6x1	53	10	43	46	11.0	23.3	4000
5.5	M6x1	53	10	43	50	12.5	30.4	5000
9	M6x1	85	15	70	72	19.0	38.0	5000
6.6	M6x1	85	12	73	48	19.0	38.0	5000
6.6	M6x1	53	12	41	68	14.2	40.0	6000
9	M6x1	90	15	75	78	33.2	70.0	6000
9	M6x1	56	15	41	75	15.7	52.2	6000
11	M6x1	93	17	76	88	38.3	93.3	6000
11	M8x1	98	16	75	85	43.6	122.5	6000
11	M8x1	126	18	96	95	70.8	218.4	6000
13.5	M8x1	128	20	96	110	80.0	288.3	7000