




FK FK シリーズ寸法表

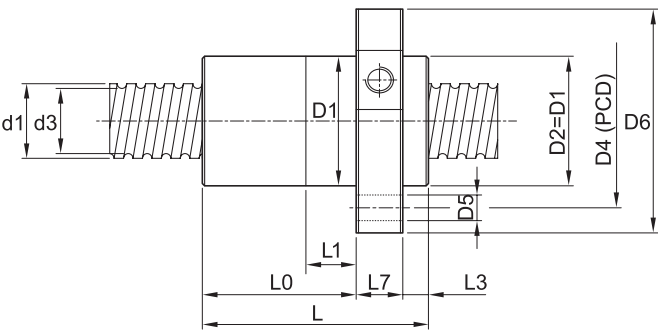

呼び型番	d ₁ ねじ軸外径	P _h リード	d _o ボール中心径	D _a ボール径	d ₂ 谷径	回路数	S _a	D _{1 g6}	D ₄ (PCD)	D ₅	D ₆
FK 1605	15.6	5	16	3.5	12.7	3	0.09	28	38	5.5	48
FK 2005	19.6	5	20	3.5	16.7	3	0.09	36	47	6.6	58
FK 2505	24.6	5	25	3.5	21.7	3	0.09	40	51	6.6	62
FK 3205	31.6	5	32	3.5	28.7	4	0.09	50	65	9	80
FK 3210	31.6	10	32	5.556	27.1	3	0.15	50	65	9	80
FK 4005	39.6	5	40	3.5	36.7	5	0.09	63	78	9	93
FK 4010	39.6	10	40	7.144	34.0	4	0.18	63	78	9	93
FK 5010	49.5	10	50	7.144	43	4	0.18	75	93	11	110
FK 6310	62.5	10	63	7.144	56.9	5	0.18	90	108	11	125
FK 8010	79.5	10	80	7.144	73.9	6	0.18	105	125	13.5	145

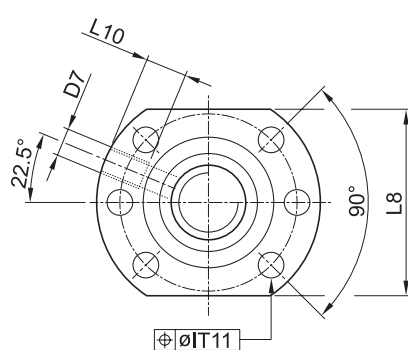

[FK1605~3210]

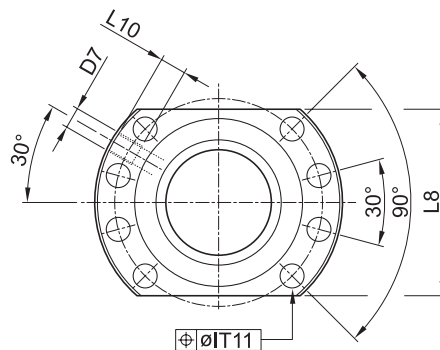

[FK4005~8010]

単位：mm

L _{±1}	L _{0 ±1}	L _{1 ±2}	L _{3 ±0.5}	L ₇	L ₈	D ₇ 給脂穴	L ₁₀	基本動定格荷重		標準 軸長さ	ナット 質量 [kg]	軸	
								動定格	静定格			質量 [kg]	慣性モーメント [kg·mm ² /m]
								C(KN)	Co(KN)				
48.5	33	10	5.5	10	40	M6x1	8	9.5	10.9	3000	0.25	1.2	32
48.5	33	10	5.5	10	44	M6x1	8	11.5	15.5	4000	0.35	2.0	85
49	33	10	6.0	10	48	M6x1	8	13.1	20.2	5000	0.37	3.3	225
57	39	10	6.0	12	62	M6x1	8	19.3	36.3	6000	0.7	5.6	645
73	55	16	6.0	12	62	M6x1	8	26.4	39	6000	0.8	5.3	580
66	45	10	7.0	14	70	M8x1	10	26.3	59.2	6000	1.2	9.0	1650
88.5	67.5	16	7.0	14	70	M8x1	10	64.9	109	6000	1.4	8.3	1400
92	69	16	7.0	16	85	M8x1	10	66.4	134.3	6000	2	13.5	3700
103.5	78.5	16	7.0	18	95	M8x1	10	93.8	229.7	6000	3	22	9870
121	92	16	9.0	20	110	M8x1	10	121.9	374.9	7000	3.9	36.4	26850