




FH FH シリーズ寸法表

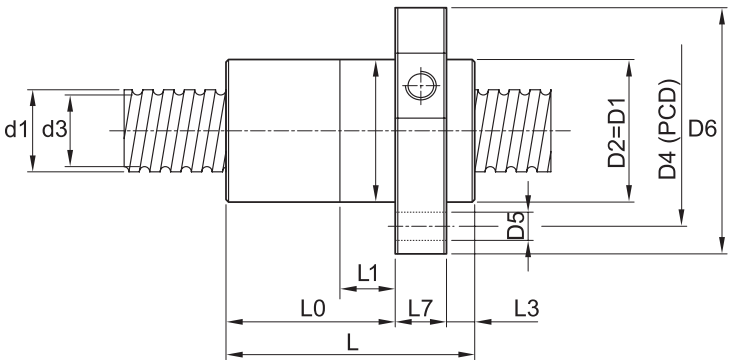

呼び型番	d ₁ ねじ軸外径	P _n リード	d _o ボール中心径	D _a ボール径	d ₂ 谷径	回路数	S _a	D _{1 g6}	D ₄ (PCD)	D ₅	D ₆
FH 2020	19.6	20	20	3.5	16.7	2.8	0.08	36	47	6.6	58
FH 2510	24.6	10	25	3.5	21.7	6	0.09	40	51	6.6	62
FH 2525	24.6	25	25	3.5	21.7	3	0.08	40	51	6.6	62
FH 3220	31.6	20	32	5.556	27.1	5.6	0.15	56	71	9	86
FH 4020	39.6	20	40	5.556	35.2	5.6	0.15	63	78	9	93
FH 4040	39.6	40	40	7.144	34	3.6	0.18	70	85	9	100
FH 5020	49.5	20	50	6.35	44.6	5.6	0.16	75	93	11	110
FH 6320	62.5	20	63	7.144	56.9	5.6	0.18	95	115	13.5	135

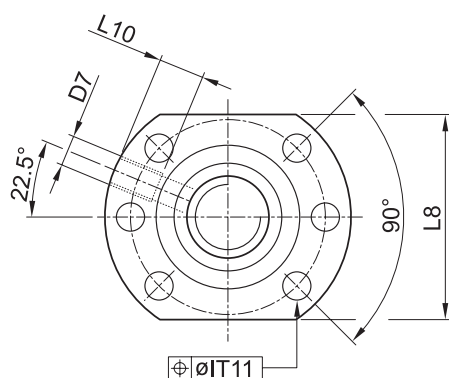

[FH2020~3220]

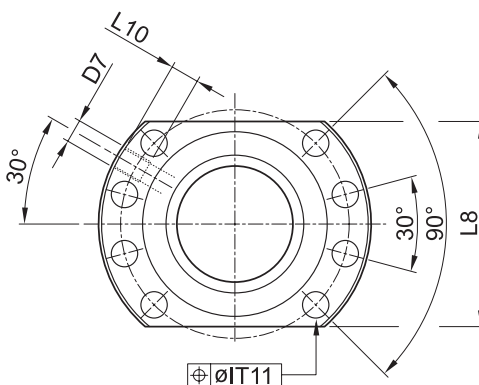

[FH4020~6320]

単位：mm

L _{±1}	L _{0 ±1}	L _{1 ±2}	L _{3 ±0.5}	L ₇	L ₈	D ₇ 給脂穴	L ₁₀	基本動定格荷重		標準 軸長さ	ナット 質量 [kg]	軸	
								動定格	静定格			質量 [kg]	慣性モーメント [kg·mm ² /m]
								C(KN)	Co(KN)				
36	15	4	11	10	44	M6x1	8	10.8	18.6	4000	0.24	1.9	73
51	30.9	20.7	10.1	10	48	M6x1	8	24.7	53.4	5000	0.45	3.3	225
39	19	9	10	10	48	M6x1	10	13.1	26	5000	0.3	3.3	225
83	52	25	19	12	68	M6x1	8	47.2	83.2	6000	1.4	5.3	580
83	49.5	16	19.5	14	70	M8x1	10	52.2	103.6	6000	1.6	7.6	1520
104	69	25	21	14	77	M8x1	10	59.7	108.9	6000	2.4	8.4	1430
85	47	16	22	16	85	M8x1	10	78.8	188.7	6000	2.2	13.6	3730
86	42	18	24	20	100	M8x1	10	103.1	270.8	6000	3.8	22	9050