



SCVRU2

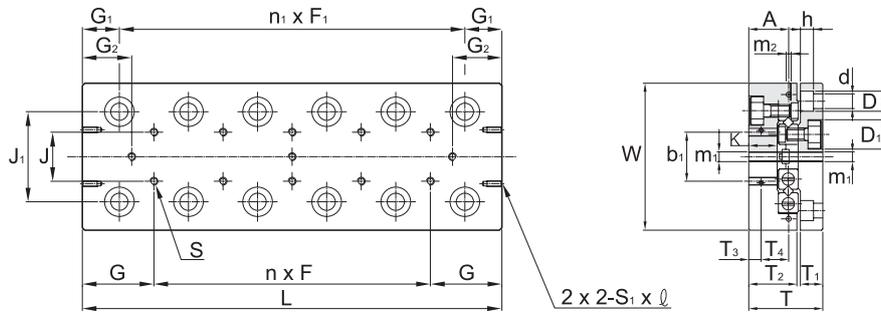

SCVRU2


呼び型番	最大 スト ローク	組合せ寸法				取付												
		W -0.2 -0.4	T ±0.1	L	質量 [kg]	J	nxF	G	S	J1	n1xF1	G1	G2	b1	T3	S1xℓ	T2	T1
SCVRU 2035	18	40	21	35	0.2	15	-	17.5	M3	25	1x15	10	3	16	3.4	M2x4	14	6.5
SCVRU 2050	30			50	0.26		1x15				2x15		4.5					
SCVRU 2065	40			65	0.34		2x15				3x15		7					
SCVRU 2080	50			80	0.42		3x15				4x15		9.5					
SCVRU 2095	60			95	0.5		4x15				5x15		12					
SCVRU 2110	70			110	0.58		5x15				6x15		14.5					
SCVRU 2125	80			125	0.66		6x15				7x15		17					

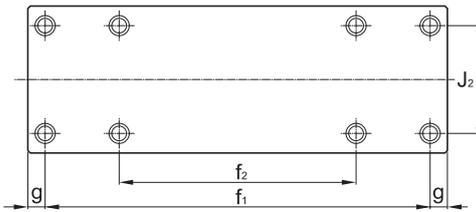

単位：mm

寸法								ローラゲージ寸法				ローラ数	基本定格荷重 [kN]			静的許容モーメント [N.m]			精度 [μm]	
K	d	D	h	D1	m1	A	m2	J2	f1	f2	g	Z	C	Co	Mpo	Myo	Mro	ΔC	ΔD	
7.5	3.5	6	3.5	6	M3	11	M3	30	25	-	5	5	0.51	0.51	2.29	1.4	3.06	2	4	
									40	-		7	0.69	0.76	3.76	2.6	4.59			
									55	-		9	0.85	0.98	5.62	4.17	5.89			
									70	40		12	1.18	1.57	9.1	7.22	9.42			
									85	55		14	1.27	1.76	11.8	9.7	10.5	3	6	
									100	70		17	1.47	2.06	16.7	14.1	12.3			
									115	85		19	1.57	2.25	20.4	17.5	13.5			

静的許容モーメント

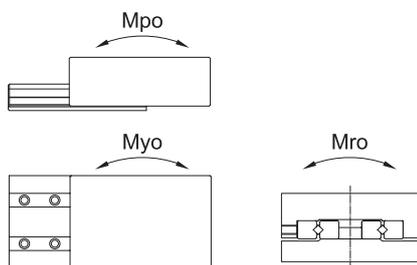

精度

