

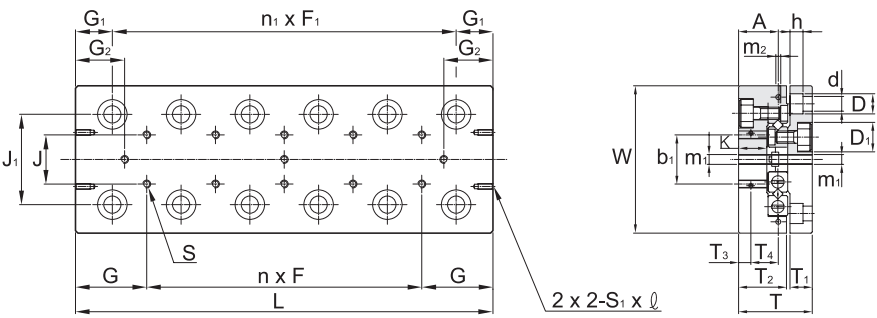


SCVRU4

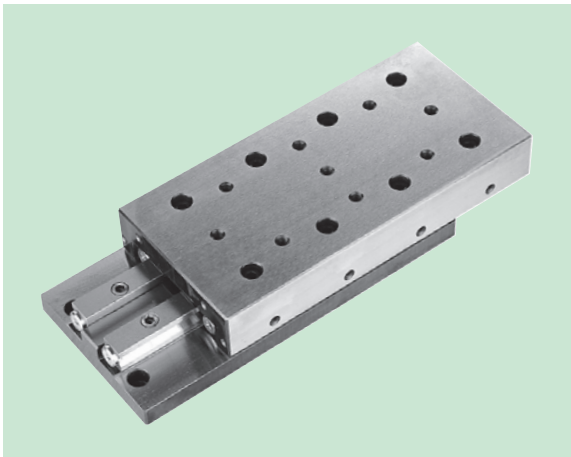

SCVRU4


呼び型番	最大 スト ローク	組合せ寸法				取 付														
		W ±0.1	T ±0.1	L	質量 [kg]	J	nxF	G	S	J1	n1xF1	G1	G2	b1	b2	T3	T4	S1xℓ	T2	T1
SCVRU 4085	50	80	35	85	1.5	40	-	42.5	M5	53	1x40	22.5	10.5	55	6.5		M3x6	24	10.5	
SCVRU 4125	75			125	2.3		1x40				2x40		18							
SCVRU 4165	105			165	3.1		2x40				3x40		23							
SCVRU 4205	135			205	3.8		3x40				4x40		30.5							
SCVRU 4245	155			245	4.6		4x40				5x40		38							
SCVRU 4285	185			285	5.3		5x40				6x40		43							

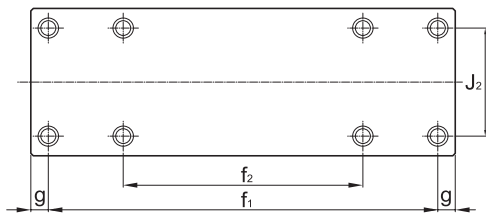

単位：mm

寸 法								ローラゲージ寸法				ローラ数	基本定格荷重 [kN]			静的許容モーメント [N.m]			精度 [μm]	
K	d	D	h	D1	m1	A	m2	J2	f1	f2	g	Z	C	Co	Mpo	Myo	Mro	△C	△D	
12.5	5.5	9.5	6	9.5	M4	18.5	M4	60	65	-	10	7	3.53	4.8	48.7	33.7	64	2	5	
									80	-		11	5.2	8.04	101	79.1	107		6	
									120	-		14	6.77	11.3	153	125	150	3	7	
									160	80	22.5	18	8.14	14.5	239	204	193			
									200	120		22	9.42	17.7	344	302	235			
									240	160		26	10.7	20.9	468	418	278			

静的許容モーメント

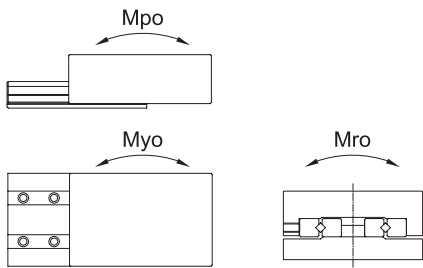

精度

