

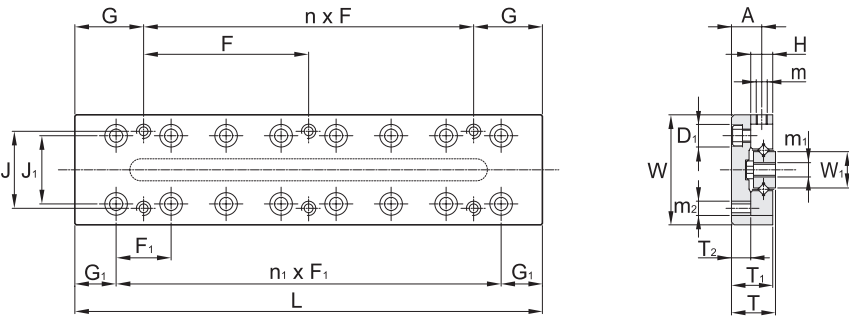


SCVRT1

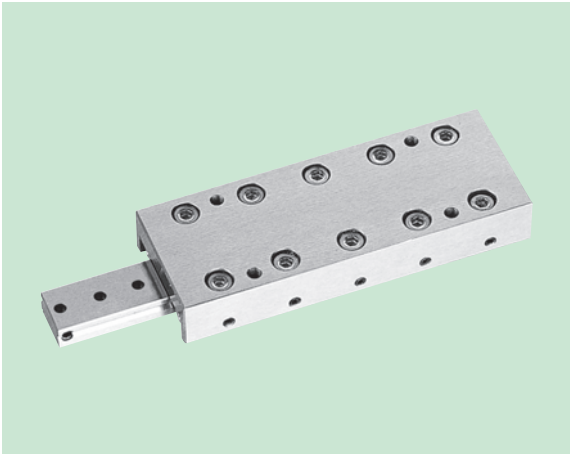

SCVRT1


呼び型番	最大 ストローク	組合せ寸法				取 付							
		W±0.1	T±0.1	L	質量 [g]	J	nx F	G	m2	n1 x F1	J1	D1	G1
SCVRT 1025	12	20	8	25	23	14	1x18	3.5	M2.6	1x10	12.4	4.1	7.5
SCVRT 1035	18			35	32		1x28	3.5		2x10			
SCVRT 1045	25			45	42		1x20	12.5		3x10			
SCVRT 1055	32			55	52		1x30	12.5		4x10			
SCVRT 1065	40			65	62		2x20	12.5		5x10			
SCVRT 1075	45			75	72		1x30	22.5		6x10			
SCVRT 1085	50			85	82		2x30	12.5		7x10			

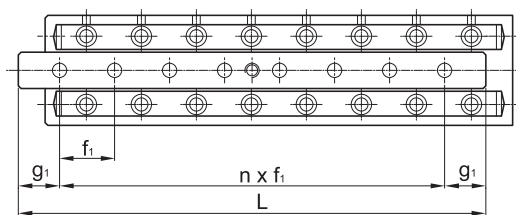

単位：mm

寸 法						ローラゲージ寸法			ローラ数	基本定格荷重[kN]		静的許容モーメント[N.m]			精度[μm]	
T1	T2	H	W1	A	m	m1	nxf1	g1	Z	C	Co	Mpo	Myo	Mro	ΔC	ΔD
7.5	3.5	4	6.7	5.5	M2	M2.6	2x7.5	5	5	0.28	0.27	0.75	0.46	0.69	2	4
							2x10	7.5	7	0.38	0.41	1.23	0.85	1.03		
							3x10		10	0.56	0.69	2.18	1.67	1.72		
							4x10		12	0.65	0.82	2.97	2.35	2.06		5
							5x10		14	0.73	0.96	3.87	3.17	2.40		
							6x10		18	0.87	1.27	6.05	5.16	3.19		
							7x10		20	0.94	1.37	7.32	6.37	3.43		

静的許容モーメント

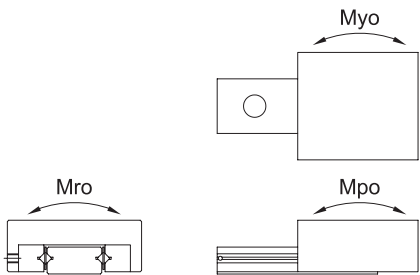

精度

