

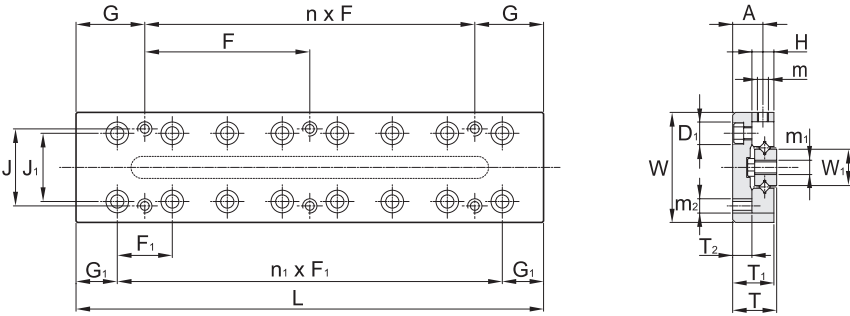


SCVRT2

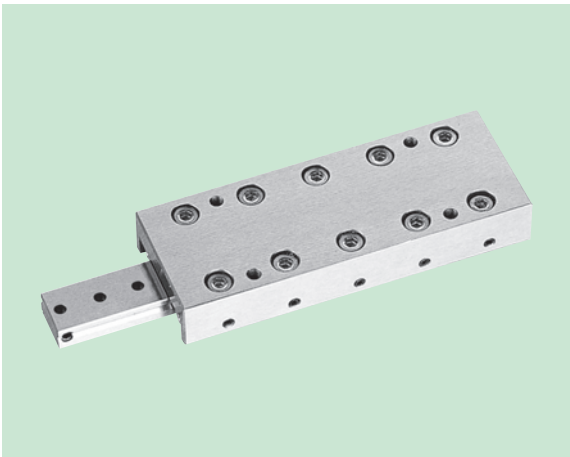

SCVRT2


呼び型番	最大 ストローク	組合せ寸法				取 付							
		W±0.1	T±0.1	L	質量 [g]	J	nx F	G	m2	n1x F1	J1	D1	G1
SCVRT 2035	18	30	12	35	78	22	1x28	3.5	M3	1x15	20	6	10
SCVRT 2050	30			50	113		1x43	3.5		2x15			
SCVRT 2065	40			65	147		1x30	17.5		3x15			
SCVRT 2080	50			80	184		1x45	17.5		4x15			
SCVRT 2095	60			95	220		2x30	17.5		5x15			
SCVRT 2110	70			110	257		1x45	32.5		6x15			
SCVRT 2125	80			125	290		2x45	17.5		7x15			

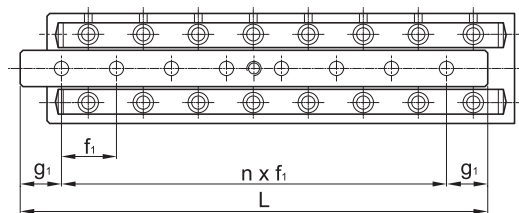

単位：mm

寸 法						ローラゲージ寸法			ローラ数	基本定格荷重[kN]		静的許容モーメント[N.m]			精度[μm]	
T1	T2	H	W1	A	m	m1	nxf1	g1	Z	C	Co	Mpo	Myo	Mro	△C	△D
11.5	5.5	6	12.2	8.5	M2	M3	1x20	7.5	5	0.51	0.51	2.29	1.37	2.21	2	4
							2x15	5	7	0.69	0.76	3.76	2.65	3.32		
							3x15		9	0.85	0.98	5.62	4.22	4.25		5
							4x15		12	0.98	1.27	9.10	7.26	5.52		
							5x15		14	1.18	1.57	11.8	9.71	6.80		
							6x15		17	1.47	2.06	16.7	14.1	8.93		
							7x15		19	1.57	2.25	20.4	17.5	9.77		

静的許容モーメント

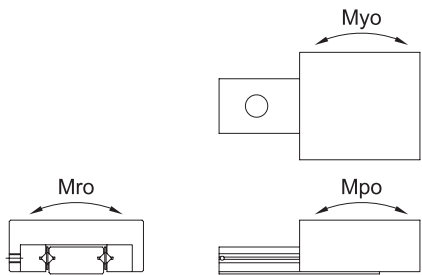

精度

