

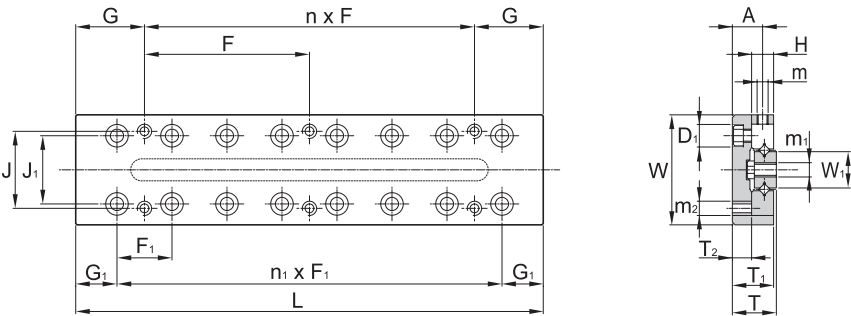


SCVRT3

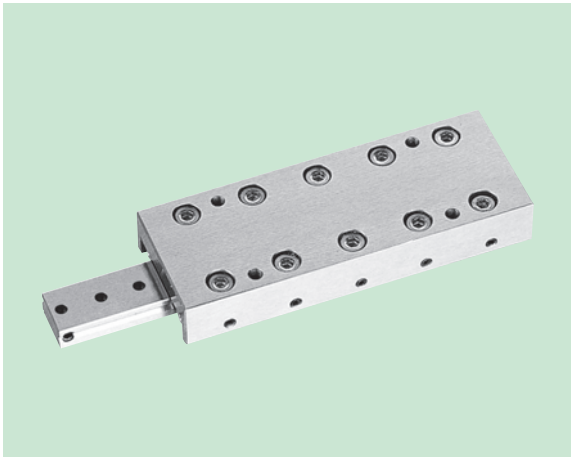

SCVRT3


呼び型番	最大 ストローク	組合せ寸法				取 付							
		$W \pm 0.1$	$T \pm 0.1$	L	質量 [g]	J	$n \times F$	G	m2	$n1 \times F1$	J1	D1	G1
SCVRT 3055	30	40	16	55	229	30	1x40	7.5	M4	1x25	28.4	7.5	15
SCVRT 3080	45			80	336		1x65	7.5		2x25			
SCVRT 3105	60			105	442		1x50	27.5		3x25			
SCVRT 3130	75			130	551		1x75	27.5		4x25			
SCVRT 3155	90			155	657		2x50	27.5		5x25			
SCVRT 3180	105			180	766		1x75	52.5		6x25			
SCVRT 3205	130			205	871		2x75	27.5		7x25			

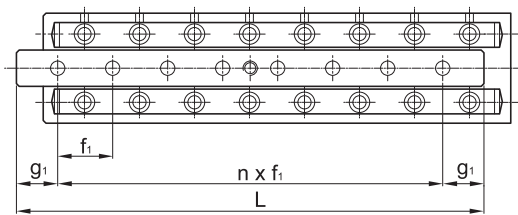

単位：mm

寸 法						ローラゲージ寸法			ローラ数	基本定格荷重[kN]		静的許容モーメント[N.m]			精度[μm]	
T1	T2	H	W1	A	m	m1	nx f1	g1	Z	C	Co	Mpo	Myo	Mro	△C	△D
15.5	7.5	8	16	11.5	M2	M4	1x35	10	6	1.27	1.37	9.85	6.57	7.97	2	5
							2x35	15	10	2.16	2.84	22.2	17	16.5		
							3x25		13	2.94	4.22	34.8	28.1	24.4	5	6
							4x25		17	3.63	5.69	55.8	47.1	33.3		
							5x25		20	3.92	6.37	74.7	64.6	36.9		
							6x25		24	4.02	6.57	104	92.3	38.1		
							7x25		26	4.22	7.16	120	107	41.5		

静的許容モーメント

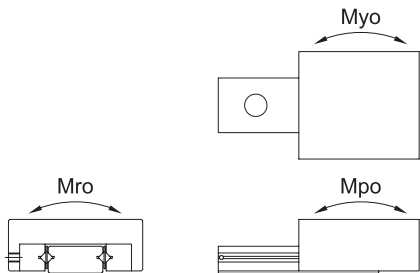

精度

