

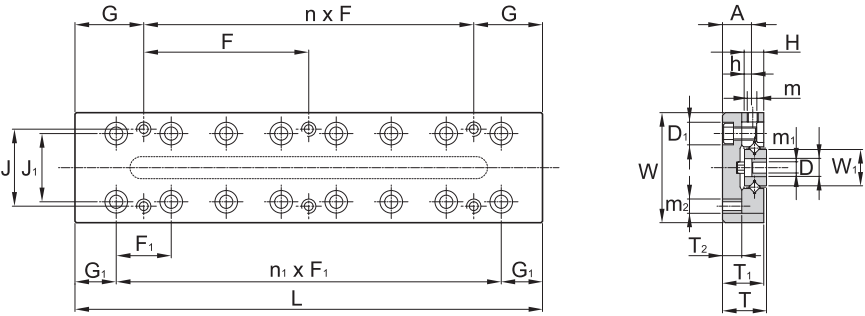


SCVRT1-A

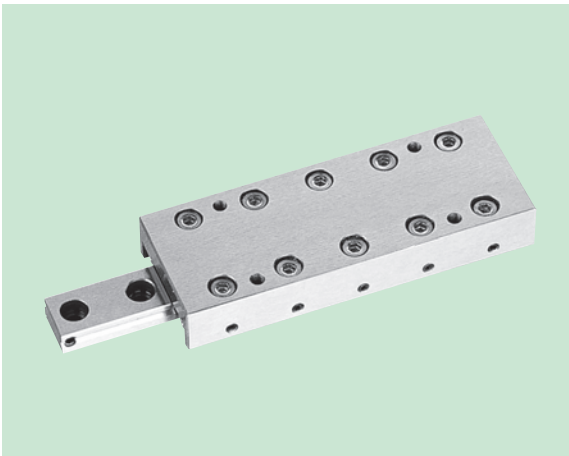

SCVRT1-A


呼び型番	最大 ストローク	組合せ寸法				取 付							
		W±0.1	T±0.1	L	質量 [g]	J	nxF	G	m2	n1xF1	J1	D1	G1
SCVRT 1025A	12	20	8	25	23	14	1x18	3.5	M2.6	1x10	12.4	4.1	7.5
SCVRT 1035A	18			35	32		1x28	3.5		2x10			
SCVRT 1045A	25			45	42		1x20	12.5		3x10			
SCVRT 1055A	32			55	52		1x30	12.5		4x10			
SCVRT 1065A	40			65	62		2x20	12.5		5x10			
SCVRT 1075A	45			75	72		1x30	22.5		6x10			
SCVRT 1085A	50			85	82		2x30	12.5		7x10			

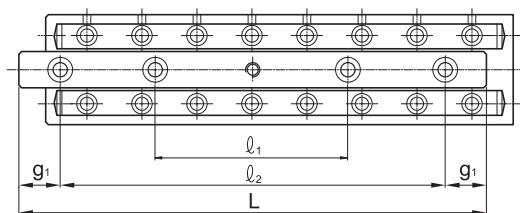

単位：mm

寸 法						ローラゲージ寸法						ローラ数	基本定格荷重[kN]		静的許容モーメント[N.m]			精度[μm]	
T1	T2	H	W1	A	m	m1	D	h	ℓ1	ℓ2	g1	Z	C	Co	Mpo	Myo	Mro	△C	△D
7.5	3.5	4	6.7	5.5	M2	2.5	4.1	2.2	-	18	3.5	5	0.28	0.27	0.75	0.46	0.69	2	4
									-	25	5	7	0.38	0.41	1.23	0.85	1.03		
									25	38	3.5	10	0.56	0.69	2.18	1.67	1.72		
									29	48	3.5	12	0.65	0.82	2.97	2.35	2.06		5
									31	55	5	14	0.73	0.96	3.87	3.17	2.40		
									35	65	5	18	0.87	1.27	6.05	5.16	3.19		
									40	75	5	20	0.94	1.37	7.32	6.37	3.43		

静的許容モーメント

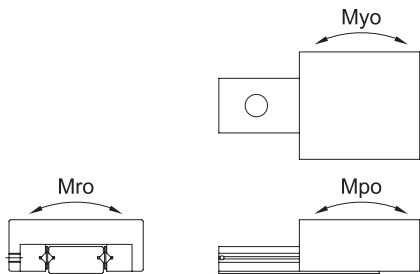

精度

