

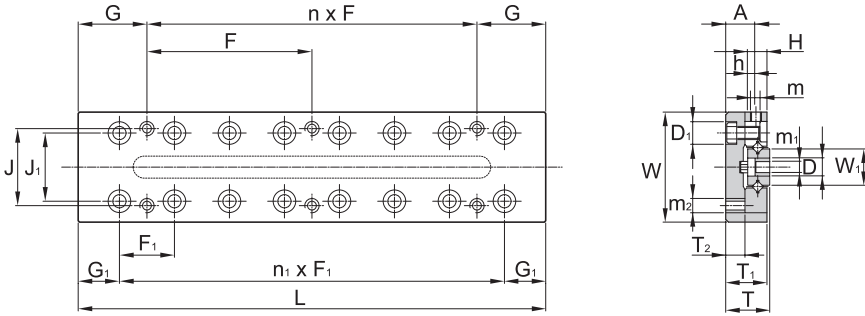


SCVRT2-A

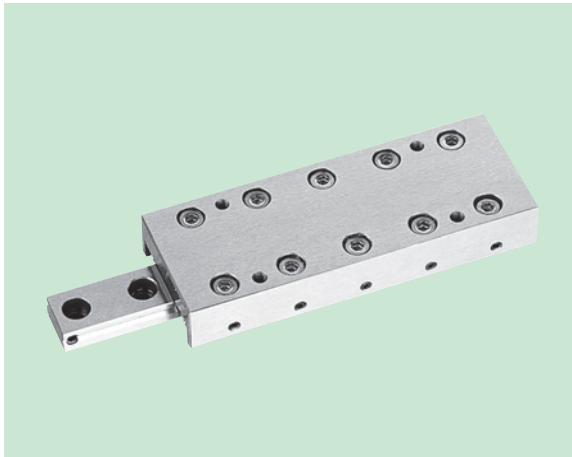

SCVRT2-A


| 呼び型番        | 最大<br>ストローク | 組合せ寸法 |       |     |           | 取 付 |      |      |    |        |    |    |    |
|-------------|-------------|-------|-------|-----|-----------|-----|------|------|----|--------|----|----|----|
|             |             | W±0.1 | T±0.1 | L   | 質量<br>[g] | J   | nx F | G    | m2 | n1x F1 | J1 | D1 | G1 |
| SCVRT 2035A | 18          | 30    | 12    | 35  | 78        | 22  | 1x28 | 3.5  | M3 | 1x15   | 20 | 6  | 10 |
| SCVRT 2050A | 30          |       |       | 50  | 113       |     | 1x43 | 3.5  |    | 2x15   |    |    |    |
| SCVRT 2065A | 40          |       |       | 65  | 147       |     | 1x30 | 17.5 |    | 3x15   |    |    |    |
| SCVRT 2080A | 50          |       |       | 80  | 184       |     | 1x45 | 17.5 |    | 4x15   |    |    |    |
| SCVRT 2095A | 60          |       |       | 95  | 220       |     | 2x30 | 17.5 |    | 5x15   |    |    |    |
| SCVRT 2110A | 70          |       |       | 110 | 257       |     | 1x45 | 32.5 |    | 6x15   |    |    |    |
| SCVRT 2125A | 80          |       |       | 125 | 290       |     | 2x45 | 17.5 |    | 7x15   |    |    |    |

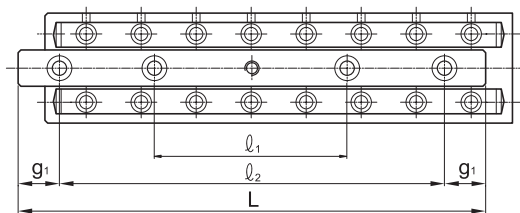

単位 : mm

| 寸 法  |     |   |      |     |    | ローラゲージ寸法 |   |     |    |     |     | ローラ数 | 基本定格荷重[kN] |      | 静的許容モーメント[N.m] |      |      | 精度[μm] |    |
|------|-----|---|------|-----|----|----------|---|-----|----|-----|-----|------|------------|------|----------------|------|------|--------|----|
| T1   | T2  | H | W1   | A   | m  | m1       | D | h   | ℓ1 | ℓ2  | g1  | Z    | C          | Co   | Mpo            | Myo  | Mro  | ΔC     | ΔD |
| 11.5 | 5.5 | 6 | 12.2 | 8.5 | M2 | 3.5      | 6 | 3.2 | -  | 25  | 5   | 5    | 0.51       | 0.51 | 2.29           | 1.37 | 2.21 | 2      | 4  |
|      |     |   |      |     |    |          |   |     | -  | 35  | 7.5 | 7    | 0.69       | 0.76 | 3.76           | 2.65 | 3.32 |        |    |
|      |     |   |      |     |    |          |   |     | 33 | 55  | 5   | 9    | 0.85       | 0.98 | 5.62           | 4.22 | 4.25 |        |    |
|      |     |   |      |     |    |          |   |     | 40 | 70  | 5   | 12   | 0.98       | 1.27 | 9.10           | 7.26 | 5.52 |        | 5  |
|      |     |   |      |     |    |          |   |     | 45 | 85  | 5   | 14   | 1.18       | 1.57 | 11.8           | 9.71 | 6.80 |        |    |
|      |     |   |      |     |    |          |   |     | 50 | 95  | 7.5 | 17   | 1.47       | 2.06 | 16.7           | 14.1 | 8.93 |        |    |
|      |     |   |      |     |    |          |   |     | 55 | 110 | 7.5 | 19   | 1.57       | 2.25 | 20.4           | 17.5 | 9.77 |        |    |

静的許容モーメント

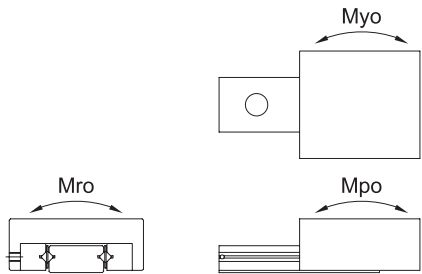

精度

