


標準タイプ

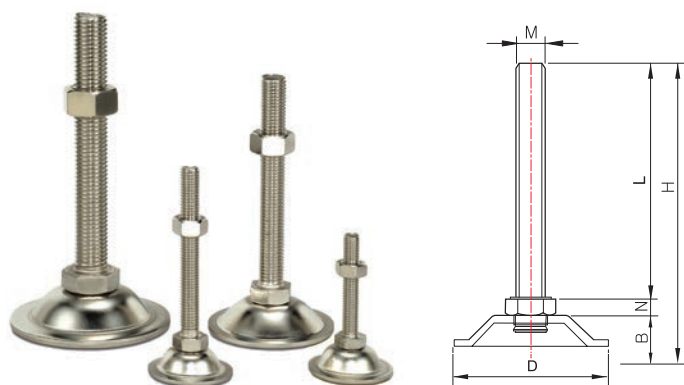

TM

材質: ボルト 機械構造用炭素鋼 (S10C相当)
受皿 熱間圧延鋼板 (SPHC)
表面処理: ニッケルメッキ

TM...SC

材質: ボルト 機械構造用炭素鋼 (S10C相当)
受皿 熱間圧延鋼板 (SPHC)
表面処理: 三価クロメート

TSM

材質: ボルト ステンレス鋼棒 (SUS304)
受皿 ステンレス鋼板 (SUS304)
表面処理: パシペート

TM / TM...SC

TSM

標準品 / 三価クロメート品			ステンレス (SUS304)			主要寸法						耐荷重 (4EA/kg)
品番	価格	板厚	品番	価格	板厚	M	L	H	D	N	B	
TM0640 (SC)	200	2.0t	TSM0640	400	2.0t	M6x1.0	40	55	36	6	9	100
TM0840 (SC)	220	2.0t	TSM0840	440	2.0t	M8x1.25	40	55	36	6	9	200
TM0880 (SC)	240	2.0t	TSM0880	530	2.0t	M8x1.25	80	95	36	6	9	200
TM1060 (SC)	260	2.6t	TSM1060	670	2.5t	M10x1.5	60	82	50	7	15	300
TM10100 (SC)	280	2.6t	TSM10100	750	2.5t	M10x1.5	100	122	50	7	15	300
TM1250 (SC)	290	2.6t	TSM1250	810	2.5t	M12x1.75	50	73	50	8	15	500
TM1275 (SC)	300	2.6t	TSM1275	820	2.5t	M12x1.75	75	98	50	8	15	500
TM12100 (SC)	300	2.6t	TSM12100	830	2.5t	M12x1.75	100	123	50	8	15	500
TM12125 (SC)	320	2.6t	TSM12125	920	2.5t	M12x1.75	125	148	50	8	15	500
TM12150 (SC)	350	2.6t	TSM12150	1,020	2.5t	M12x1.75	150	173	50	8	15	500
TM1650 (SC)	350	3.0t	TSM1650	1,360	3.0t	M16x2.0	50	77	76	10	17	800
TM1675 (SC)	380	3.0t	TSM1675	1,480	3.0t	M16x2.0	75	102	76	10	17	800
TM16100 (SC)	400	3.0t	TSM16100	1,520	3.0t	M16x2.0	100	127	76	10	17	800
TM16130 (SC)	430	3.0t	TSM16130	1,630	3.0t	M16x2.0	130	157	76	10	17	800
TM16150 (SC)	450	3.0t	TSM16150	1,780	3.0t	M16x2.0	150	177	76	10	17	800
TM16180 (SC)	550	3.0t	TSM16180	1,950	3.0t	M16x2.0	180	207	76	10	17	800
TM16200 (SC)	640	3.0t	TSM16200	2,350	3.0t	M16x2.0	200	227	76	10	17	800
TM20100 (SC)	610	3.0t	TSM20100	2,190	3.0t	M20x2.5	100	130	76	13	17	1,000
TM20130 (SC)	640	3.0t	TSM20130	2,380	3.0t	M20x2.5	130	160	76	13	17	1,000
TM20150 (SC)	670	3.0t	TSM20150	2,510	3.0t	M20x2.5	150	180	76	13	17	1,000
TM20180 (SC)	770	3.0t	TSM20180	2,950	3.0t	M20x2.5	180	210	76	13	17	1,000
TM20200 (SC)	870	3.0t	TSM20200	3,230	3.0t	M20x2.5	200	230	76	13	17	1,000
TM24100 (SC)	1,280	6.0t	—	—	—	M24x3.0	100	141	105	16	25	2,500
TM24150 (SC)	1,360	6.0t	—	—	—	M24x3.0	150	191	105	16	25	2,500
TM24200 (SC)	1,570	6.0t	—	—	—	M24x3.0	200	241	105	16	25	2,500