


標準タイプ (ラバー付)

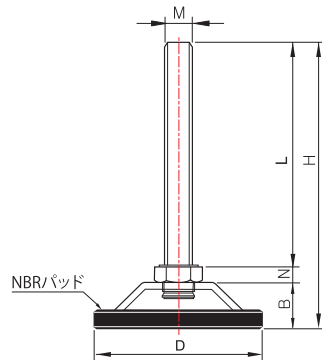

■ TMR

材質: ボルト 機械構造用炭素鋼 (S10C相当)
受皿 熱間圧延鋼板 (SPHC)
表面処理: ニッケルメッキ

■ TMR...SC

材質: ボルト 機械構造用炭素鋼 (S10C相当)
受皿 熱間圧延鋼板 (SPHC)
表面処理: 三価クロメート

■ TSMR

材質: ボルト ステンレス鋼棒 (SUS304)
受皿 ステンレス鋼板 (SUS304)
表面処理: パシペート

■ TMR/TMR...SC ■ TSMR

標準品 / 三価クロメート品			ステンレス (SUS304)			主要寸法						耐荷重 (4EA/kg)
品番	価格	板厚	品番	価格	板厚	M	L	H	D	N	B	
TMR0640 (SC)	340	2.0t	TSMR0640	500	2.0t	M6x1.0	40	59	40	6	13	100
TMR0840 (SC)	360	2.0t	TSMR0840	540	2.0t	M8x1.25	40	59	40	6	13	200
TMR0880 (SC)	380	2.0t	TSMR0880	620	2.0t	M8x1.25	80	99	40	6	13	200
TMR1060 (SC)	440	2.6t	TSMR1060	840	2.5t	M10x1.5	60	87	55	7	20	300
TMR10100 (SC)	460	2.6t	TSMR10100	880	2.5t	M10x1.5	100	127	55	7	20	300
TMR1250 (SC)	450	2.6t	TSMR1250	890	2.5t	M12x1.75	50	78	55	8	20	500
TMR1275 (SC)	460	2.6t	TSMR1275	910	2.5t	M12x1.75	75	103	55	8	20	500
TMR12100 (SC)	470	2.6t	TSMR12100	920	2.5t	M12x1.75	100	128	55	8	20	500
TMR12125 (SC)	480	2.6t	TSMR12125	1,030	2.5t	M12x1.75	125	153	55	8	20	500
TMR12150 (SC)	500	2.6t	TSMR12150	1,100	2.5t	M12x1.75	150	178	55	8	20	500
TMR1675 (SC)	580	3.0t	TSMR1675	1,540	3.0t	M16x2.0	75	108	81	10	23	800
TMR16100 (SC)	590	3.0t	TSMR16100	1,580	3.0t	M16x2.0	100	133	81	10	23	800
TMR16130 (SC)	650	3.0t	TSMR16130	1,720	3.0t	M16x2.0	130	163	81	10	23	800
TMR16150 (SC)	700	3.0t	TSMR16150	1,850	3.0t	M16x2.0	150	183	81	10	23	800
TMR16180 (SC)	790	3.0t	TSMR16180	2,070	3.0t	M16x2.0	180	213	81	10	23	800
TMR16200 (SC)	870	3.0t	TSMR16200	2,540	3.0t	M16x2.0	200	233	81	10	23	800
TMR20100 (SC)	780	3.0t	TSMR20100	2,330	3.0t	M20x2.5	100	136	81	13	23	1000
TMR20130 (SC)	840	3.0t	TSMR20130	2,570	3.0t	M20x2.5	130	166	81	13	23	1000
TMR20150 (SC)	970	3.0t	TSMR20150	2,700	3.0t	M20x2.5	150	186	81	13	23	1000
TMR20180 (SC)	1,070	3.0t	TSMR20180	3,100	3.0t	M20x2.5	180	216	81	13	23	1000
TMR20200 (SC)	1,190	3.0t	TSMR20200	3,420	3.0t	M20x2.5	200	236	81	13	23	1000