


アンカー固定タイプ

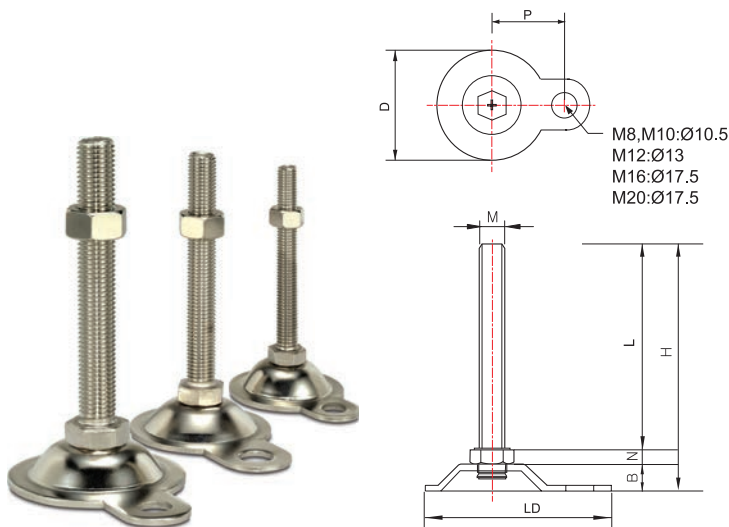

TK

材 質: ボルト 機械構造用炭素鋼 (S10C相当)
受 皿 熱間圧延鋼板 (SPHC)
表面処理: ニッケルメッキ

TSK

材 質: ボルト ステンレス鋼棒 (SUS304)
受 皿 ステンレス鋼板 (SUS304)
表面処理: パシペート

TK

TSK

標準品			ステンレス (SUS304)			主要寸法								耐荷重 (4EA/kg)
品番	価格	板厚	品番	価格	板厚	M	L	H	D	N	B	LD	P	
TK0840	350	2.6t	TSK0840	990	2.5t	M8x1.25	40	58	42	6	12	58.5	26.5	200
TK0880	420	2.6t	TSK0880	1,060	2.5t	M8x1.25	80	98	42	6	12	58.5	26.5	200
TK1060	460	2.6t	TSK1060	1,140	2.5t	M10x1.5	60	79	42	7	12	58.5	26.5	300
TK10100	510	2.6t	TSK10100	1,210	2.5t	M10x1.5	100	119	42	7	12	58.5	26.5	300
TK1250	520	3.0t	TSK1250	1,290	3.0t	M12x1.75	50	73	63	8	15	84	39	600
TK1275	530	3.0t	TSK1275	1,330	3.0t	M12x1.75	75	98	63	8	15	84	39	600
TK12100	550	3.0t	TSK12100	1,450	3.0t	M12x1.75	100	123	63	8	15	84	39	600
TK12125	570	3.0t	TSK12125	1,500	3.0t	M12x1.75	125	148	63	8	15	84	39	600
TK12150	620	3.0t	TSK12150	1,550	3.0t	M12x1.75	150	173	63	8	15	84	39	600
TK1675	630	3.0t	TSK1675	1,820	3.0t	M16x2.0	75	102	76	10	17	112	56	800
TK16100	670	3.0t	TSK16100	1,980	3.0t	M16x2.0	100	127	76	10	17	112	56	800
TK16130	710	3.0t	TSK16130	2,150	3.0t	M16x2.0	130	157	76	10	17	112	56	800
TK16150	740	3.0t	TSK16150	2,280	3.0t	M16x2.0	150	177	76	10	17	112	56	800
TK16180	850	3.0t	TSK16180	2,740	3.0t	M16x2.0	180	207	76	10	17	112	56	800
TK16200	910	3.0t	TSK16200	2,890	3.0t	M16x2.0	200	227	76	10	17	112	56	800
TK2080	800	3.0t	TSK2080	2,550	3.0t	M20x2.5	80	110	76	13	17	112	56	1,000
TK20100	850	3.0t	TSK20100	2,660	3.0t	M20x2.5	100	130	76	13	17	112	56	1,000
TK20130	940	3.0t	TSK20130	2,930	3.0t	M20x2.5	130	160	76	13	17	112	56	1,000
TK20150	990	3.0t	TSK20150	3,080	3.0t	M20x2.5	150	180	76	13	17	112	56	1,000
TK20180	1,040	3.0t	TSK20180	3,600	3.0t	M20x2.5	180	210	76	13	17	112	56	1,000
TK20200	1,200	3.0t	TSK20200	3,990	3.0t	M20x2.5	200	230	76	13	17	112	56	1,000