


軽防振タイプ

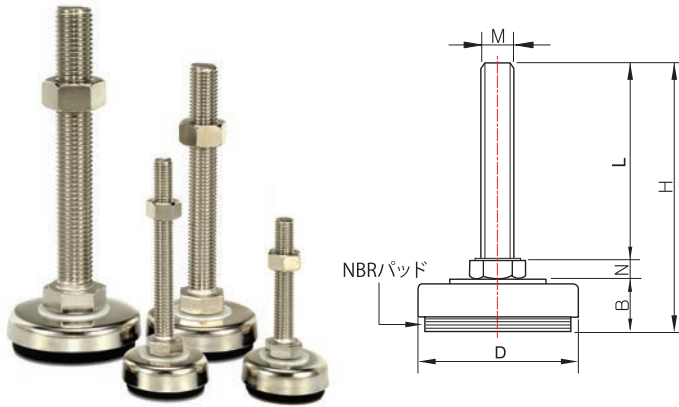

■ TB

材 質: ボルト 機械構造用炭素鋼 (S10C相当)
受 皿 熱間圧延鋼板 (SPHC)
表面処理: ニッケルメッキ

■ TSB

材 質: ボルト ステンレス鋼棒 (SUS304)
受 皿 ステンレス鋼板 (SUS304)
表面処理: パシベート

■ TB

■ TSB

標準品			ステンレス (SUS304)			主要寸法						耐荷重 (4EA/kg)
品番	価格	板厚	品番	価格	板厚	M	L	H	D	N	B	
TB0640	360	1.5t	TSB0640	600	1.5t	M6x1.0	40	63	40	6	17	100
TB0840	380	1.5t	TSB0840	630	1.5t	M8x1.25	40	63	40	6	17	200
TB0880	400	1.5t	TSB0880	690	1.5t	M8x1.25	80	103	40	6	17	200
TB1060	450	2.0t	TSB1060	780	2.0t	M10x1.5	60	84.5	48	7	17.5	300
TB10100	500	2.0t	TSB10100	870	2.0t	M10x1.5	100	124.5	48	7	17.5	300
TB1250	580	2.0t	TSB1250	1,300	2.0t	M12x1.75	50	75.5	48	8	17.5	500
TB1275	600	2.0t	TSB1275	1,350	2.0t	M12x1.75	75	100.5	48	8	17.5	500
TB12100	630	2.0t	TSB12100	1,430	2.0t	M12x1.75	100	125.5	48	8	17.5	500
TB12125	660	2.0t	TSB12125	1,500	2.0t	M12x1.75	125	150.5	48	8	17.5	500
TB12150	700	2.0t	TSB12150	1,580	2.0t	M12x1.75	150	175.5	48	8	17.5	500
TB1650	660	2.0t	TSB1650	1,650	2.0t	M16x2.0	50	78.5	61	10	18.5	800
TB1675	720	2.0t	TSB1675	1,870	2.0t	M16x2.0	75	103.5	61	10	18.5	800
TB16100	770	2.0t	TSB16100	2,000	2.0t	M16x2.0	100	128.5	61	10	18.5	800
TB16130	820	2.0t	TSB16130	2,170	2.0t	M16x2.0	130	158.5	61	10	18.5	800
TB16150	870	2.0t	TSB16150	2,300	2.0t	M16x2.0	150	178.5	61	10	18.5	800
TB16180	1,000	2.0t	TSB16180	2,830	2.0t	M16x2.0	180	208.5	61	10	18.5	800
TB16200	1,060	2.0t	TSB16200	3,000	2.0t	M16x2.0	200	228.5	61	10	18.5	800
TB2080	970	2.0t	TSB2080	2,650	2.0t	M20x2.5	80	111.5	61	13	18.5	1,000
TB20100	980	2.0t	TSB20100	2,740	2.0t	M20x2.5	100	131.5	61	13	18.5	1,000
TB20130	1,080	2.0t	TSB20130	3,040	2.0t	M20x2.5	130	161.5	61	13	18.5	1,000
TB20150	1,110	2.0t	TSB20150	3,220	2.0t	M20x2.5	150	181.5	61	13	18.5	1,000
TB20180	1,290	2.0t	TSB20180	3,780	2.0t	M20x2.5	180	211.5	61	13	18.5	1,000
TB20200	1,310	2.0t	TSB20200	4,200	2.0t	M20x2.5	200	231.5	61	13	18.5	1,000