


SMP スナップリング

■穴用C形止め輪 (JIS B 2804)




●穴用

バネ用鋼				バネ用ステンレス鋼				止め輪			
品番	価 格			品番	価 格			d3		t	
	1~9個	10~49個	50個以上		1~9個	10~49個	50個以上	基本寸法	寸法差	基本寸法	寸法差
R-10	36	30	26	—	—	—	—	10.7	±0.18	1	±0.05
R-11	36	30	26	—	—	—	—	11.8		1	
R-12	36	30	26	—	—	—	—	13		1	
R-13	36	30	26	—	—	—	—	14.1		1	
R-14	36	30	26	—	—	—	—	15.1		1	
R-15	36	30	26	SR-15	80	68	56	16.2		1	
R-16	36	30	26	SR-16	80	68	56	17.3	±0.2	1	±0.06
R-17	36	30	26	SR-17	90	76	64	18.3		1	
R-18	40	34	28	SR-18	90	76	64	19.5		1	
R-19	40	34	28	SR-19	100	86	70	20.5		1	
R-20	40	34	28	SR-20	100	86	70	21.5		1	
R-21	44	38	30	SR-21	100	86	70	22.5		1	
R-22	44	38	30	SR-22	100	86	70	23.5	±0.25	1	±0.07
R-24	56	48	40	SR-24	120	102	84	25.9		1.2	
R-25	56	48	40	SR-25	130	110	92	26.9		1.2	
R-26	56	48	40	SR-26	130	110	92	27.9		1.2	
R-28	60	52	42	SR-28	140	120	98	30.1		1.2	
R-30	60	52	42	SR-30	160	136	112	32.1		1.2	
R-32	60	52	42	SR-32	160	136	112	34.4	±0.4	1.2	
R-34	90	76	64	SR-34	220	188	154	36.5		1.5	
R-35	90	76	64	SR-35	240	204	168	37.8		1.5	
R-36	100	86	70	SR-36	260	222	182	38.8		1.5	
R-37	100	86	70	SR-37	280	238	196	39.8		1.5	
R-38	100	86	70	—	—	—	—	40.8	±0.4	1.5	
R-40	120	102	84	SR-40	400	340	280	43.5		1.75	±0.07
R-42	120	102	84	SR-42	440	374	308	45.5		1.75	
R-45	120	102	84	SR-45	480	408	336	48.5		1.75	

SMP スナップリング

■穴用C形止め輪 (JIS B 2804)




●穴用


バネ用鋼				バネ用ステンレス鋼				止め輪			
品番	価 格			品番	価 格			d3		t	
	1～9個	10～49個	50個以上		1～9個	10～49個	50個以上	基本寸法	寸法差	基本寸法	寸法差
R-47	120	102	84	SR-47	560	476	392	50.5	±0.45	1.75	±0.07
R-48	160	136	112	SR-48	640	544	448	51.5		1.75	
R-50	180	154	126	SR-50	760	646	532	54.2		2	
R-52	180	154	126	SR-52	800	680	560	56.2		2	
R-55	200	170	140	SR-55	880	748	616	59.2		2	
R-56	220	188	154	—	—	—	—	60.2		2	
R-58	220	188	154	SR-58	1,040	884	728	62.2		2	
R-60	220	188	154	SR-60	1,060	902	742	64.2		2	
R-62	220	188	154	SR-62	1,100	936	770	66.2		2	
R-63	300	256	210	—	—	—	—	67.2		2	
R-65	300	256	210	SR-65	1,600	1,360	1,120	69.2	±0.55	2.5	±0.08
R-68	300	256	210	SR-68	1,640	1,394	1,148	72.5		2.5	
R-70	340	290	238	SR-70	1,700	1,446	1,190	74.5		2.5	
R-72	340	290	238	SR-72	1,800	1,530	1,260	76.5		2.5	
R-75	400	340	280	SR-75	1,900	1,616	1,330	79.5		2.5	
R-80	440	374	308	SR-80	2,100	1,786	1,470	85.5		2.5	
R-82	500	426	350	—	—	—	—	87.5		2.5	
R-85	600	510	420	SR-85	3,100	2,636	2,170	90.5		3	±0.09
R-90	700	596	490	SR-90	3,600	3,060	2,520	95.5		3	
R-95	1,000	850	700	SR-95	3,800	3,320	2,730	100.5		3	
R-100	1,100	936	770	SR-100	4,300	3,720	3,060	105.5		3	
R-105	1,800	1,440	1,100	SR-105	10,000	8,400	7,200	112		4	
R-110	2,100	1,680	1,260	SR-110	10,800	9,000	7,700	117		4	
R-120	2,250	1,800	1,360	—	—	—	—	127	±0.65	4	

SMP スナップリング

■軸用C形止め輪 (JIS B 2804)



サイズ S-9以下




●軸用

バネ用鋼				バネ用ステンレス鋼				止め輪			
品番	価 格			品番	価 格			d3		t	
	1~9個	10~49個	50個以上		1~9個	10~49個	50個以上	基本寸法	寸法差	基本寸法	寸法差
S-3	24	20	16	—	—	—	—	2.7	+0.04 -0.15	0.25	±0.025
S-4	24	20	16	SS-4	50	42	36	3.7		0.4	±0.03
S-5	24	20	16	SS-5	50	42	36	4.7	+0.06 -0.2	0.6	±0.04
S-6	24	20	16	SS-6	50	42	36	5.6		0.7	
S-7	24	20	16	SS-7	50	42	36	6.5		0.8	
S-8	24	20	16	SS-8	50	42	36	7.4		0.8	
S-9	24	20	16	SS-9	50	42	36	8.4	±0.15	1	±0.05
S-10	24	20	16	SS-10	60	52	42	9.3		1	
S-11	26	22	18	SS-11	60	52	42	10.2	±0.18	1	
S-12	26	22	18	SS-12	60	52	42	11.1		1	
S-13	26	22	18	SS-13	70	60	50	12		1	
S-14	26	22	18	SS-14	70	60	50	12.9		1	
S-15	26	22	18	SS-15	80	68	56	13.8		1	
S-16	26	22	18	SS-16	80	68	56	14.7		1	
S-17	26	22	18	SS-17	80	68	56	15.7	±0.2	1	±0.06
S-18	36	30	26	SS-18	90	76	64	16.5		1.2	
S-19	36	30	26	SS-19	90	76	64	17.5		1.2	
S-20	36	30	26	SS-20	100	86	70	18.5		1.2	
S-21	36	30	26	SS-21	100	86	70	19.5		1.2	
S-22	48	40	34	SS-22	120	102	84	20.5		1.2	
S-23	48	40	34	SS-23	120	102	84	21.4		1.2	
S-24	48	40	34	SS-24	120	102	84	22.2		1.2	
S-25	48	40	34	SS-25	130	110	92	23.2		1.2	
S-26	48	40	34	SS-26	130	110	92	24.2		1.2	
S-27	80	68	56	—	—	—	—	25	±0.25	1.2	±0.06
S-28	80	68	56	SS-28	180	154	126	25.9		1.5	
S-29	80	68	56	—	—	—	—	26.9		1.5	
S-30	80	68	56	SS-30	200	170	140	27.9		1.5	
S-32	80	68	56	SS-32	200	170	140	29.6		1.5	
S-34	120	102	84	—	—	—	—	31.5		1.5	
S-35	120	102	84	SS-35	240	204	168	32.2		1.5	

SMP スナップリング

■軸用C形止め輪 (JIS B 2804)




●軸用

バネ用鋼				バネ用ステンレス鋼				止め輪			
品番	価 格			品番	価 格			d3		t	
	1~9個	10~49個	50個以上		1~9個	10~49個	50個以上	基本寸法	寸法差	基本寸法	寸法差
S-36	130	110	92	SS-36	360	306	252	33.2	±0.25	1.75	±0.07
S-38	130	110	92	—	—	—	—	35.2		1.75	
S-40	130	110	92	SS-40	420	358	294	37	±0.4	1.75	
S-42	140	120	92	SS-42	540	460	378	38.5		1.75	
S-45	140	120	92	SS-45	560	476	392	41.5		1.75	
S-47	200	170	140	—	—	—	—	43.4		1.75	
S-48	200	170	140	—	—	—	—	44.5		1.75	
S-50	220	188	154	SS-50	800	680	560	45.8	±0.45	2	±0.07
S-52	220	188	154	SS-52	820	698	574	47.8		2	
S-55	280	238	196	SS-55	960	816	672	50.8		2	
S-58	280	238	196	—	—	—	—	53.8		2	
S-60	280	238	196	SS-60	1,160	986	812	55.8		2	
S-62	400	340	280	—	—	—	—	57.8		2	±0.08
S-63	400	340	280	—	—	—	—	58.8		2	
S-65	480	408	336	SS-65	1,600	1,360	1,120	60.8		2.5	
S-68	480	408	336	—	—	—	—	63.5		2.5	
S-70	520	442	364	SS-70	1,800	1,530	1,260	65.5		2.5	
S-72	520	442	364	—	—	—	—	67.5		2.5	
S-75	520	442	364	SS-75	1,960	1,666	1,372	70.5	±0.55	2.5	±0.09
S-80	600	510	420	SS-80	2,200	1,870	1,540	74.5		2.5	
S-85	960	816	672	SS-85	3,600	3,060	2,520	79.5		3	
S-90	1,040	884	672	SS-90	4,000	3,400	2,800	84.5		3	
S-95	1,100	936	770	—	—	—	—	89.5		3	
S-100	1,200	1,020	840	SS-100	11,600	9,860	8,120	94.5		3	

SMP スナップリング


■E形止め輪 (JIS B 2805)



●Eリング

バネ用鋼				バネ用ステンレス鋼				止め輪				
品番	価 格			品番	価 格			d		D	H	t
	1~9個	10~49個	50個以上		1~9個	10~49個	50個以上	基本寸法	寸法差			
E-1.5	20	18	14	SE-1.5	24	20	16	1.5	-0.09	4	1.3	0.4
E-2	20	18	14	SE-2	24	20	16	2		5	1.7	0.4
E-2.5	20	18	14	SE-2.5	24	20	16	2.5		6	2.1	0.4
E-3	24	20	16	SE-3	30	26	22	3		7	2.6	0.6
E-4	24	20	16	SE-4	30	26	22	4	-0.12	9	3.5	0.6
E-5	24	20	16	SE-5	30	26	22	5		11	4.3	0.6
E-6	24	20	16	SE-6	30	26	22	6		12	5.2	0.8
E-7	24	20	16	SE-7	30	26	22	7	-0.15	14	6.1	0.8
E-8	30	26	22	SE-8	36	30	26	8		16	6.9	0.8
E-9	30	26	22	SE-9	36	30	26	9		18	7.8	0.8
E-10	50	42	36	SE-10	80	68	56	10	-0.18	20	8.7	1
E-12	60	52	42	SE-12	100	86	70	12		23	10.4	1
E-15	120	102	84	SE-15	360	306	252	15		29	13	1.5
E-19	180	154	126	SE-19	600	510	420	19	-0.21	37	16.5	1.5
E-24	300	256	210	SE-24	900	766	630	24		44	20.8	2

■Eリング用 ETホルダー

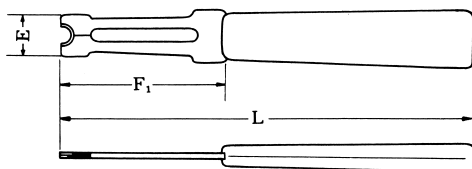

品番	価 格	適用 Eリング	寸法		
			L	F1	E
ETH-1.5	2,550	E・SE-1.5	122	38	7
ETH-2	2,550	E・SE-2	124	40	10
ETH-2.5	2,550	E・SE-2.5	124	40	10
ETH-3	2,550	E・SE-3	123	43	12
ETH-4	3,000	E・SE-4	129	49	18
ETH-5	3,000	E・SE-5	129	49	18
ETH-6	3,000	E・SE-6	154	54	21
ETH-7	3,540	E・SE-7	154	54	21
ETH-8	3,540	E・SE-8	160	60	24
ETH-9	3,990	E・SE-9	160	60	24
ETH-10	3,990	E・SE-10	163	63	26
ETH-12	3,990	E・SE-12	165	65	29