




❖ JF (給油式、めねじタイプ)

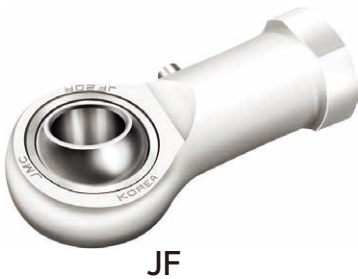

JF

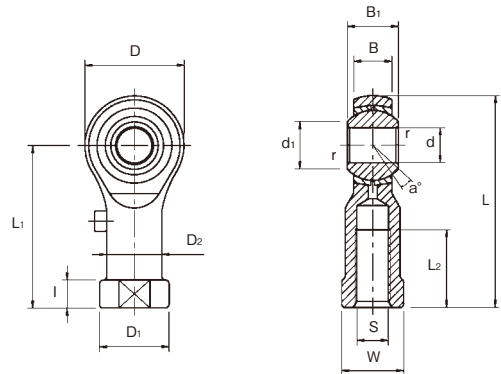

◆ 品番表示方法



呼び品番	価格	主 要 寸 法 (mm)														ボール 径	許容 傾斜角	基本 定格荷重	重量
		d	ねじ (s)	D	B	B1	d1	L (MAX)	I	L1 (MAX)	L2	W	D1	D2	r				
JF5R(L)	960	5	M5×0.8	16	6	8	7.7	35.5	4	27.5	14	9	11	9	0.5	11.1	13	570	16.5
JF6R(L)	960	6	M6×1.0	18.5	6.75	9	9	39.75	5	30.5	14	11	13	10	0.5	12.7	13	700	25
JF8R(L)	1,100	8	M8×1.25	23	9	12	10.4	49	6	37.5	17	14	16	12.5	0.5	15.87	13	1,000	43
JF10R(L)	1,180	10	M10×1.5	27.5	10.5	14	12.9	58.3	8	45	21	17	19	15	0.5	19.05	13	1,350	72
JF12R(L)	1,340	12	M12×1.75	31	12	16	15.8	67.1	7.5	51.6	24	19	22	17.5	0.5	22.5	13	1,700	107
JF14R(L)	1,610	14	M14×2.0	34	13.5	19	16.9	75.2	9	58.2	27	22	25	20	0.5	25.4	15	2,100	160
JF16R(L)	2,090	16	M16×2.0	38	15	21	19.3	84.7	9.5	65.7	33	24	27	22	0.5	28.5	15	2,550	210
JF18R(L)	2,450	18	M18×1.5	43	16.5	23	21.7	93.2	10	71.7	36	27	31	25	0.5	31.6	15	3,000	295
JF20R(L)	3,750	20	M20×1.5	50	16	24	23.4	103	12	78.2	40	32	37	30	0.5	33.5	15	3,850	380
JF22R(L)	4,240	22	M22×1.5	54	17	25	25.2	111.2	12	84.2	43	32	37	30	0.5	35.5	15	4,620	490
JF25R(L)	7,200	25	M25×1.5	64	19	28	29.5	126.2	12	94.2	49	36	42	33.5	0.5	40.7	15	8,140	750
JF30R(L)	10,600	30	M30×2.0	73	21	32	34.4	145.3	16.5	108.8	50	47	49	40	0.5	47	15	9,100	900
JF35R(L)	15,700	35	M36×2.0	82	23	35	39.8	173.3	17	132.3	60	49	58	48	0.5	53	15	11,400	1,400
JF40R(L)	*	40	M39×3.0	92	23	28	45	188	18	142	65	55	65	52	0.6	53	7	17,800	2,000
JF45R(L)	*	45	M42×3.0	102	27	32	50.7	196	20	145	65	60	70	58	0.6	60	7	23,800	2,500
JF50R(L)	*	50	M45×3.0	112	30	35	55.9	216	20	160	68	65	75	62	0.6	66	6	28,800	3,500
JF60R(L)	*	60	M52×3.0	135	38	44	66.8	242.5	20	175	70	75	88	70	1	80	6	44,600	5,500
JF70R(L)	*	70	M56×4.0	160	42	49	77.8	280	20	200	80	85	98	80	1	92	6	51,800	8,600


※JF20～JF70(旧品番JFG20～JFG70)

*印品番については別途お問い合わせください。


❖ JM (給油式、おねじタイプ)



JM

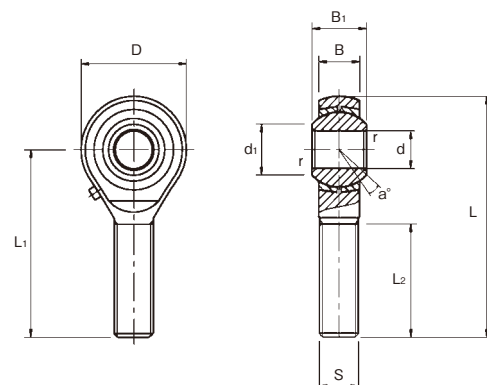

◆ 品番表示方法



呼び品番	価格	主 要 寸 法 (mm)										ボール 径	許容 傾斜角	基本 定格荷重	重量
		d	ねじ (s)	D	B	B1	d1	L (MAX)	L1 (MAX)	L2	r	mm	a°	Co (kgf)	gr.
JM5R(L)	960	5	M5×0.8	17	6	8	7.7	42	34	20	0.5	11.1	13	350	12.5
JM6R(L)	960	6	M6×1.0	18.5	6.75	9	9	47.5	38.3	22	0.5	12.7	13	500	19
JM8R(L)	1,100	8	M8×1.25	23	9	12	10.4	54.5	43	25	0.5	15.87	13	700	32
JM10R(L)	1,180	10	M10×1.5	27	10.5	14	12.9	62.3	49	29	0.5	19.05	13	1,100	54
JM12R(L)	1,340	12	M12×1.75	32	12	16	15.8	73.3	57.3	33	0.5	22.5	13	1,700	85
JM14R(L)	1,610	14	M14×2.0	34	13.5	19	16.9	80.8	63.8	36	0.5	25.4	15	2,100	126
JM16R(L)	2,090	16	M16×2.0	38	15	21	19.3	87.3	68.3	40	0.5	28.5	15	2,550	185
JM18R(L)	2,450	18	M18×1.5	43	16.5	23	21.9	95.3	73.8	44	0.5	31.6	15	3,000	260
JM20R(L)	3,750	20	M20×1.5	46	18	25	23.9	103.5	80.5	47	0.5	34.5	15	3,500	340
JM22R(L)	4,240	22	M22×1.5	54	20	28	25.8	112.8	86.8	51	0.5	38.1	15	4,200	435
JM25R(L)	7,200	25	M25×1.5	64	22	31	29.8	128.2	98.8	57	0.5	43	15	7,400	650
JM30R(L)	10,600	30	M30×2.0	73	21	32	34.4	147	111	66	0.5	47	15	9,100	910
JM35R(L)	15,700	35	M36×2.0	82	23	35	39.8	176	135	80	0.5	53	15	11,400	1,440
JM40R(L)	*	40	M39×3.0	92	23	28	45	196	150	86	0.6	53	7	17,800	2,000
JM45R(L)	*	45	M42×3.0	102	27	32	50.7	214	163	94	0.6	60	7	23,800	2,500
JM50R(L)	*	50	M45×3.0	112	30	35	55.9	241	185	107	0.6	66	6	28,800	3,500
JM60R(L)	*	60	M52×3.0	135	38	44	66.8	277.5	210	115	1	80	6	44,600	5,500
JM70R(L)	*	70	M56×4.0	160	42	49	77.8	315	235	125	1	92	6	51,800	8,600

※JM20～JM70(旧品番JMG20～JMG70)



*印品番については別途お問い合わせください。

JFT (無給油式、めねじタイプ)



JFT

◆ 品番表示方法

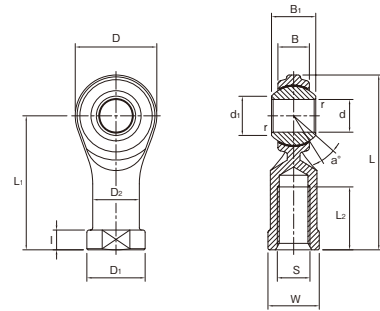

呼び品番	価格	主 要 寸 法 (mm)														ボール 径	許容 傾斜角	基本 定格荷重	重量
		d	ねじ (s)	D	B	B1	d1	L (MAX)	I	L1 (MAX)	L2	W	D1	D2	r	mm	a°	Co (kgf)	gr.
JFT5R(L)	1,020	5	M5×0.8	15	6	8	7.7	35	4	27.5	13.5	9	11	9	0.5	11.1	13	400	16.5
JFT6R(L)	1,020	6	M6×1.0	18	6.75	9	9	39	5	30.5	14	11	12	10	0.5	12.7	13	510	25
JFT8R(L)	1,140	8	M8×1.25	24	9	12	10.4	47.3	5	36.5	15	14	16	12.5	0.5	15.87	13	760	43
JFT10R(L)	1,250	10	M10×1.5	27	10.5	14	12.9	55.5	7	43	21	17	19	15	0.5	19.05	13	960	72
JFT12R(L)	1,490	12	M12×1.75	31	12	16	15.8	66	7.5	50.5	23	19	22	17.5	0.5	22.5	13	1,120	107
JFT14R(L)	1,760	14	M14×2.0	35	13.5	19	16.9	75	8.5	57.5	25	22	25	20	0.5	25.4	15	1,550	160
JFT16R(L)	2,290	16	M16×2.0	39	15	21	19.3	83	8.5	63.5	30	24	27	22	0.5	28.5	15	2,060	210
JFT18R(L)	2,850	18	M18×1.5	43	16.2	23	21.7	92	10	71.5	33	27	31	25	0.5	31.6	15	2,570	295
JFT20R(L)	3,780	20	M20×1.5	46	18	25	23.8	101	11	78	38	30	34	27.5	0.5	34.5	15	2,840	380
JFT22R(L)	*	22	M22×1.5	54	20	28	25.8	111	12	84	43	32	37	30	0.5	38.1	15	3,400	490
JFT25R(L)	*	25	M24×2.0	64	22	31	29.8	126	12	94	49	36	42	33.5	0.5	43	15	5,980	750
JFT30R(L)	*	30	M30×2.0	73	25	37	34.8	145	16.5	108.5	50	47	49	40	0.5	50.8	15	7,600	900



*印品番については別途お問い合わせください。

JMT (無給油式、おねじタイプ)



JMT

◆ 品番表示方法

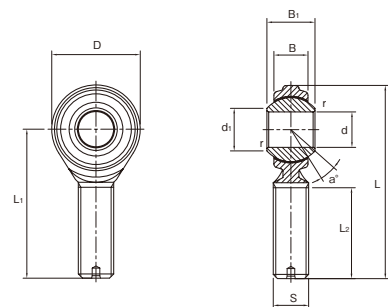

呼び品番	価格	主 要 寸 法 (mm)														ボール 径	許容 傾斜角	基本 定格荷重	重量
		d	ねじ (s)	D	B	B1	d1	L (MAX)	L1 (MAX)	L2	r	mm	a°	Co (kgf)	gr.				
JMT5R(L)	920	5	M5×0.8	17	6	8	7.7	41.5	34	20	0.5	11.1	13	350	12.5				
JMT6R(L)	920	6	M6×1.0	18	6.75	9	9	45	36.5	22	0.5	12.7	13	500	19				
JMT8R(L)	1,020	8	M8×1.25	24	9	12	10.4	53	42.5	25	0.5	15.87	13	700	32				
JMT10R(L)	1,130	10	M10×1.5	27	10.5	14	12.9	61	48	26.5	0.5	19.05	13	960	54				
JMT12R(L)	1,340	12	M12×1.75	31	12	16	15.8	69.5	54	33	0.5	22.5	13	1,120	85				
JMT14R(L)	1,580	14	M14×2.0	35	13.5	19	16.9	76.5	59	36	0.5	25.4	15	1,550	126				
JMT16R(L)	2,060	16	M16×2.0	39	15	21	19.3	85	65.5	40	0.5	28.5	15	2,060	185				
JMT18R(L)	2,560	18	M18×1.5	43	16.2	23	21.7	94.5	73	44	0.5	31.6	15	2,570	260				
JMT20R(L)	3,400	20	M20×1.5	46	18	25	23.8	103.5	80.5	47	0.5	34.5	15	2,840	340				
JMT22R(L)	*	22	M22×1.5	54	20	28	25.8	113	86	51	0.5	38.1	15	3,400	435				
JMT25R(L)	*	25	M24×2.0	64	22	31	29.8	128	96	57	0.5	43	15	5,980	650				
JMT30R(L)	*	30	M30×2.0	73	25	37	34.8	147.5	111	66	0.5	47	15	7,600	910				

*印品番については別途お問い合わせください。