


● FCF シリーズ (フラット・カーブ)

□ 特徴

- ✓ 油が塗布された鉄板搬送時の滑り防止
- ✓ 耐摩耗性に非常に優れたポリウレタン製
- ✓ 高い吸着力で高速度のワーク搬送が可能
- ✓ 薄い鉄板を吸着時でも変形なく移送可能

▶ 適用分野

- 板金、箱、自動車パネル、プレス機の鉄板供給、凸面

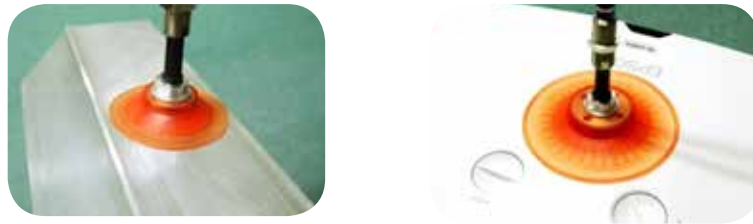

品番表示

FCF80 PU - 18F


① ② ③

① パッド径	② 材質	③ ネジ径
FCF 30 - Ø30	N - NBR	• 18F - G1/8" メネジ (FCF30~FCF125)
FCF 40 - Ø40	S - シリコン	14F - G1/4" メネジ (FCF30~FCF125)
FCF 50 - Ø50	• PU - ポリウレタン	38F - G3/8" メネジ (FCF50~FCF125)
FCF 60 - Ø60		12F - G1/2" メネジ (FCF60~FCF125)
FCF 70 - Ø70		14M - G1/4" オネジ (FCF30~FCF125)
• FCF 80 - Ø80		38M - G3/8" オネジ (FCF50~FCF125)
FCF100 - Ø100		M10M - M10xP1.5 オネジ (FCF30~FCF125)
FCF125 - Ø125		

真空度別 最大搬送力

品番	パッド容積 (cm³)	垂直搬送力 (kg)			水平搬送力 (kg)		
		-20 kPa	-60 kPa	-90 kPa	-20 kPa	-60 kPa	-90 kPa
FCF30	2	2	4.6	6.4	0.8	2	2.9
FCF40	4.4	2.9	6.9	9.9	2.1	5	7.2
FCF50	8	4.2	10.8	15.4	3.7	6.7	8.9
FCF60	14.6	5.6	15.2	22.3	5.5	13.3	16.7
FCF70	20.7	7.6	19.6	28.2	6.3	15.8	20.1
FCF80	36	10.3	25.9	34.4	6.7	17.7	23.8
FCF100	58	14.7	37.1	50.6	13.6	35.4	43.7
FCF125	115	19.4	44.5	57.9	19.1	42.5	64.9

寸法

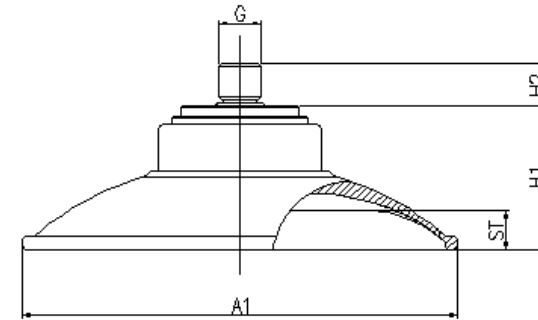

● オネジ

品番	A1	ST	H1	H2	G
FCF30..14M	32	3	33.5	9	G1/4"
FCF30..M10M			22	10	M10XP1.5
FCF40..14M	42	4	33.5	9	G1/4"
FCF40..M10M			22	10	M10XP1.5
FCF50..14M			30.5	9	G1/4"
FCF50..38M	52	5	30.5	9	G3/8"
FCF50..M10M			28	10	M10XP1.5
FCF60..14M			33.5	9	G1/4"
FCF60..38M	62	6	33.5	9	G3/8"
FCF60..M10M			31	10	M10XP1.5
FCF70..14M			33.5	9	G1/4"
FCF70..38M	72	6.5	33.5	9	G3/8"
FCF70..M10M			31	10	M10XP1.5
FCF80..14M			37.9	9	G1/4"
FCF80..38M	82.5	7.6	37.9	9	G3/8"
FCF80..M10M			35.4	10	M10XP1.5
FCF100..14M			36.9	9	G1/4"
FCF100..38M	104	9.5	36.9	9	G3/8"
FCF100..M10M			34.4	10	M10XP1.5
FCF125..14M			43.5	9	G1/4"
FCF125..38M	128	13	43.5	9	G3/8"
FCF125..M10M			41	10	M10XP1.5

● メネジ

品番	A1	ST	H1	G
FCF30..18F	32	3	22	G1/8"
FCF30..14F			33	G1/4"
FCF40..18F	42	4	22	G1/8"
FCF40..14F			33	G1/4"
FCF50..18F			28	G1/8"
FCF50..14F	52	5	28	G1/4"
FCF50..38F			30	G3/8"
FCF60..18F			31	G1/8"
FCF60..14F	62	6	31	G1/4"
FCF60..38F			33	G3/8"
FCF60..12F			31	G1/2"
FCF70..18F			31	G1/8"
FCF70..14F	72	6	31	G1/4"
FCF70..38F			33	G3/8"
FCF70..12F			31	G1/2"
FCF80..18F			35.5	G1/8"
FCF80..14F	82.5	7.6	35.5	G1/4"
FCF80..38F			37.5	G3/8"
FCF80..12F			35.5	G1/2"
FCF100..18F			34.5	G1/8"
FCF100..14F	104	9.5	34.5	G1/4"
FCF100..38F			36.5	G3/8"
FCF100..12F			34.5	G1/2"
FCF125..18F			41	G1/8"
FCF125..14F	128	13	41	G1/4"
FCF125..38F			43	G3/8"
FCF125..12F			41	G1/2"